

# FORM

GLAZED CERAMIC | WALL TILES

PLAIN COLOUR TILES



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

# FORM

Form features a colour palette of eight tones including sandy Sahara, Azure blue, and delicate Whisper to deliver on colour and character. With a bevelled edge providing depth and dimension, Form is available in a stunning gloss finish. Experiment with a herringbone pattern or coloured grouts to create sleek looks that really make an impact.

*Front Cover Image: Winter Bevelled Gloss 400x150mm - FORM1A & Charcoal Bevelled Gloss 400x150mm - FORM8A*



Winter Bevelled Gloss 400x150mm - FORM1A  
Azure Bevelled Gloss 400x150mm - FORM7A






## Roomset Photography

---



Winter Bevelled Gloss 400x150mm - FORM1A

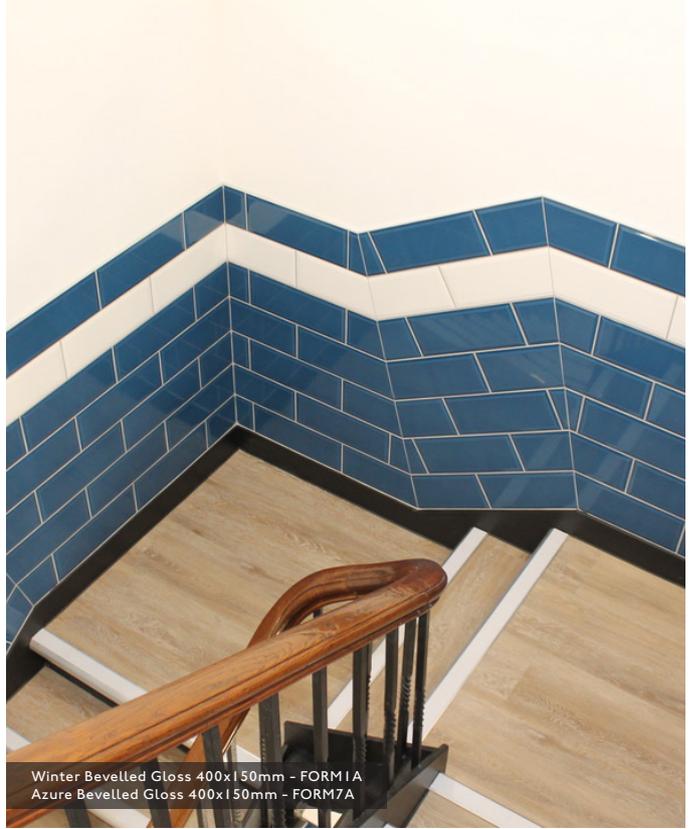

Winter Bevelled Gloss 400x150mm - FORM1A  
Azure Bevelled Gloss 400x150mm - FORM7A




Thyme Bevelled Gloss 400x150mm - FORM6A



## Colours & Product Codes

V1: Low Shade Variation



**WINTER BEVELLED**

FORM1A LRV: 86



**WHISPER BEVELLED**

FORM2A LRV: 63



**DOVE BEVELLED**

FORM3A LRV: 50



**GRAPHITE BEVELLED**

FORM4A LRV: 12



**SAHARA BEVELLED**

FORM5A LRV: 34



**THYME BEVELLED**

FORM6A LRV: 19



**AZURE BEVELLED**

FORM7A LRV: 14



**CHARCOAL BEVELLED**

FORM8A LRV: 6



## Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
I	400x150mm Bevelled	Gloss	All Colours Shown	10mm	17 Tiles	1.02 m <sup>2</sup>	17.00 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



## Technical Data

### Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Form	All Sizes Shown	Internal Only	-	-	VI	Glazed Ceramic [BIII]

### Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\leq \pm 0.25\%$	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm <sup>2</sup>	$\geq 25\text{N} / \text{mm}^2$
Thickness EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.15\%$	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A - B
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.3\%$	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 3
Water Absorption EN ISO 10545 - 3	10% to 20%	15% to 17%	Fire Rating	-	Class A1 Non Combustible
Weight / M <sup>2</sup>	16.67 kg 10mm thick				

**Note:** All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

### Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD
Form	Glazed Ceramic [BIII]	Up to 20%	Up to 100%	Up to 100%	Yes

**Note:** EPD: Environmental Product Declaration for the products shown in this overview can be on the Form pages on our website.

### Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Form or any  
of our other product ranges simply visit  
**[www.johnson-tiles.com](http://www.johnson-tiles.com)** |      

#### **Where To Find Us**

##### **Johnson Tiles**

Harewood Street,  
Tunstall,  
Stoke on Trent,  
Staffordshire,  
ST6 5JZ

Tel: +44 (0)1782 575 575  
Fax: +44 (0)1782 577 377  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)

---

##### **Samples Enquiries**

Tel: +44 (0)1782 524 043  
Fax: +44 (0)1782 577 379  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

##### **Technical Helpline**

Tel: +44 (0)1782 524 111  
Fax: +44 (0)1782 577 379  
Email: [techadvice@johnson-tiles.com](mailto:techadvice@johnson-tiles.com)

*Launched: August 2019*

**JOHNSON • TILES**   
MADE IN THE UK SINCE 1901