

# BLAKE

GLAZED PORCELAIN | FLOOR & WALL TILES

STONE SELECT



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

# BLAKE



5 SIZES




5 COLOURS



3 FINISHES

With a modern colour palette of neutral tones, Blake brings sophistication through hues of warm, earthy terracotta to grey stoneware. Blake showcases natural variation of movement and texture with a desirable stone effect to provide soft, organic detail. For a simple yet effective feature, opt for the square mosaic to create a focal point within any interior. Or explore size combinations and placement for individual style.

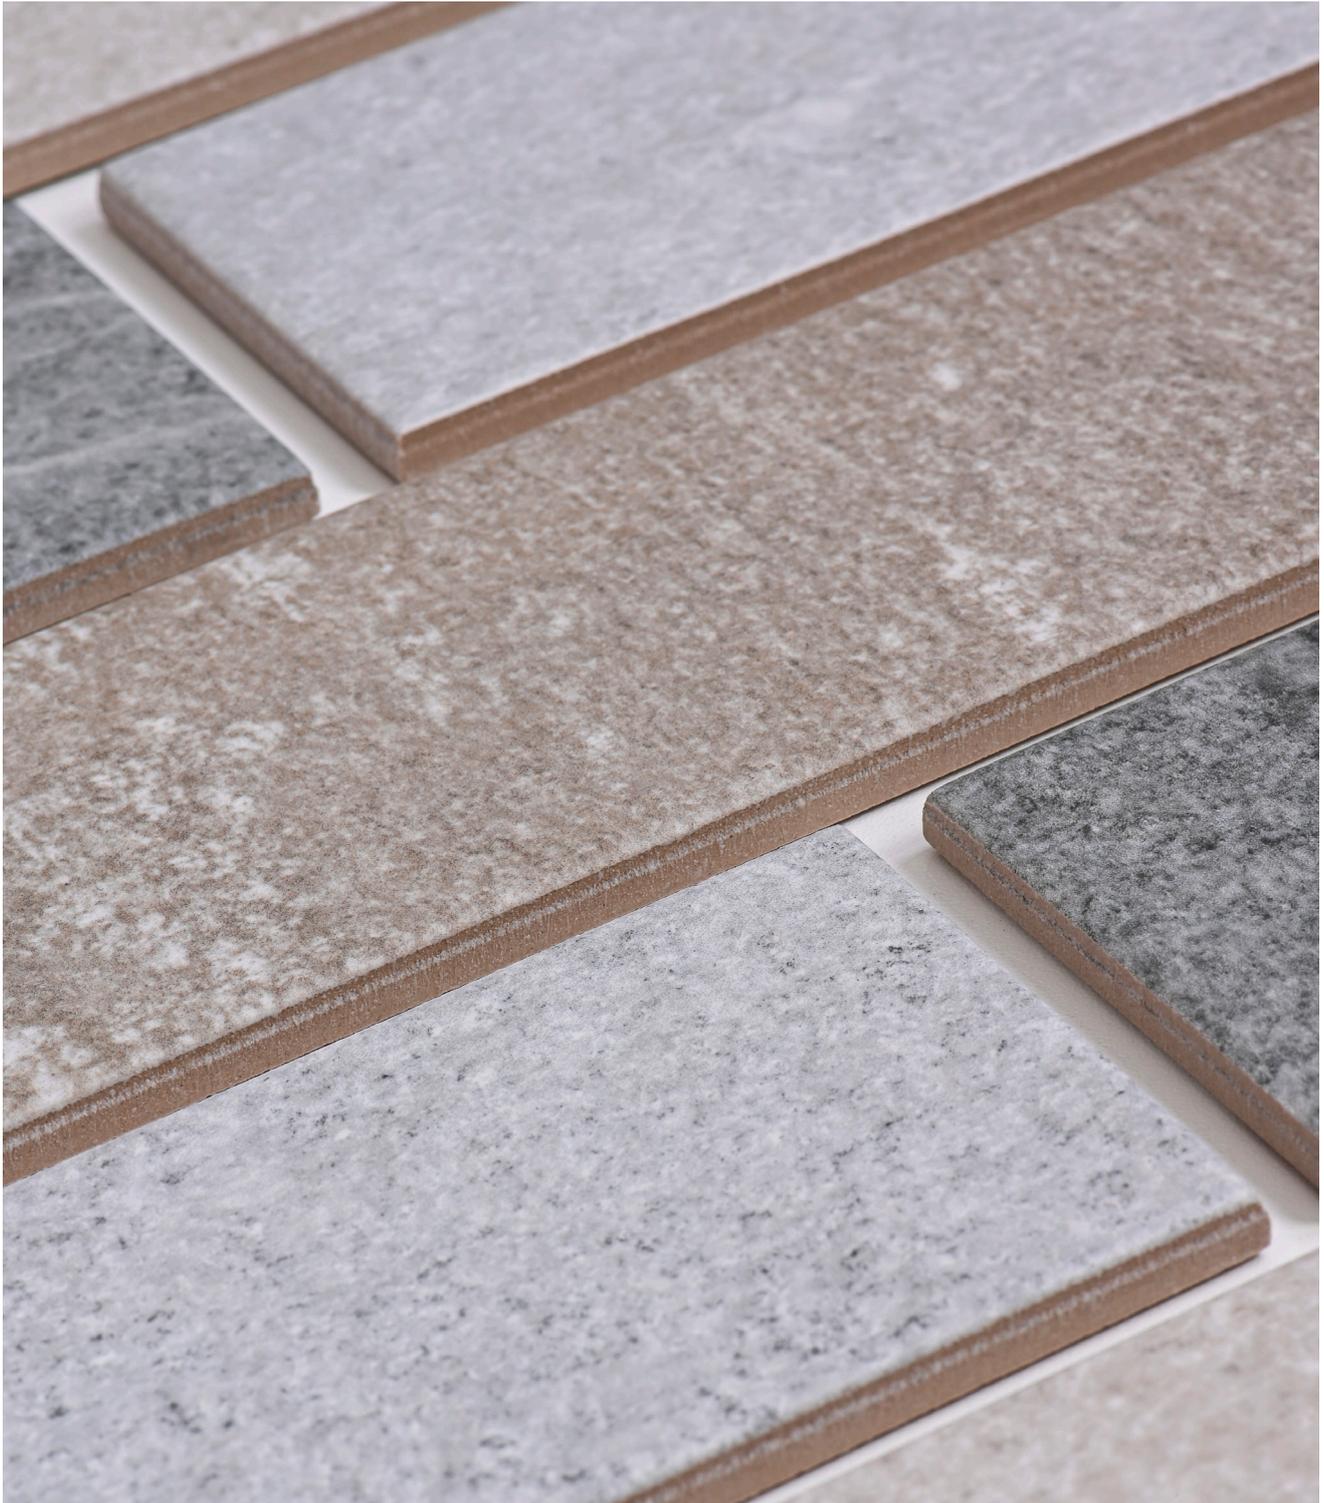




Steel Grip 330x330x7.2mm - BLK04G



## Size Formats Sizing & Packing Information

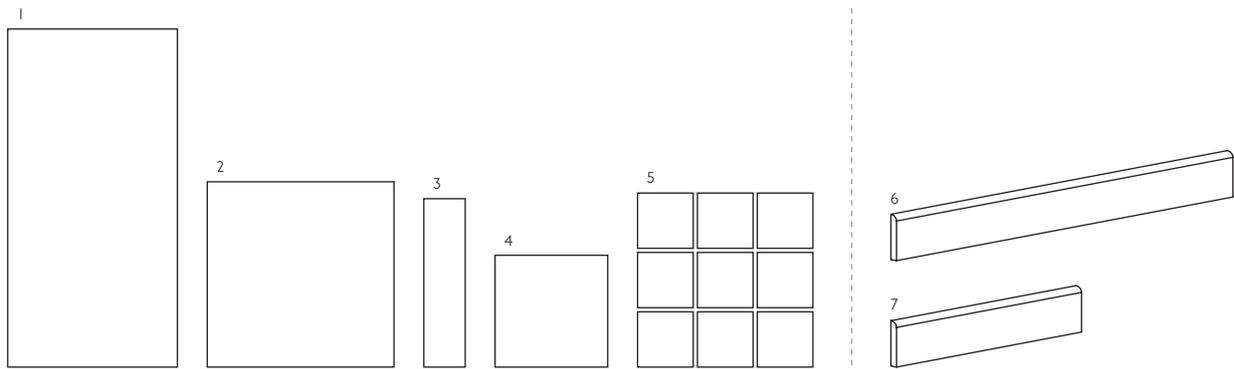

#	Size	Thickness	Finish	Structure	Colour Availability	Pcs / Box	M2 / Box	Kg / Box
1	600x300mm	7.8mm	M Matt	-	All Colours	8 Tiles	1.44m <sup>2</sup>	24.84kg
			G Grip	-	All Colours	8 Tiles	1.44m <sup>2</sup>	24.84kg
2	330x330mm	7.2mm	M Matt	-	All Colours	10 Tiles	1.09m <sup>2</sup>	17.20kg
			G Grip	-	All Colours	10 Tiles	1.09m <sup>2</sup>	17.20kg
3	300x75mm	8.3mm	B Bush Hammered	-	All Colours	44 Tiles	0.99m <sup>2</sup>	16.70kg
4	200x200mm	6mm	G Grip	-	All Colours	25 Tiles	1.00m <sup>2</sup>	12.30kg
5	300x300mm (100x100mm) Square Mosaic	6mm	G Grip	-	All Colours	10 Sheets	0.90m <sup>2</sup>	10.71kg

#	Fitting	Thickness	Finish	Structure	Colour Availability	Pcs / Box	LM / Box	Kg / Box
6	600x80mm Round Top Skirting	7.8mm	M Matt	-	All Colours	13 Tiles	7.80lm	10.60kg
7	330x80mm Round Top Skirting	7.2mm	M Matt	-	All Colours	25 Tiles	8.25lm	9.75kg

**Note:** All sizes indicated are metric modular. All sizes shown are nominal.  
For the most up-to-date product availability information for this range, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com)



Taupe Bush Hammered 300x75x8.3mm - BLK03B



## Colours & Product Codes

V4: High Shade Variation



### IVORY LRV: 54 PEI: IV

Product Codes: M BLK01M + G BLK01G + B BLK01B | Mosaic Codes: G BLK1GM | Fitting Codes: M BLK1MS



### SILVER LRV: 50 PEI: IV

Product Codes: M BLK02M + G BLK02G + B BLK02B | Mosaic Codes: G BLK2GM | Fitting Codes: M BLK2MS




### TAUPE LRV: 40 PEI: IV

Product Codes: M BLK03M + G BLK03G + B BLK03B | Mosaic Codes: G BLK3GM | Fitting Codes: M BLK3MS



### STEEL LRV: 26 PEI: III

Product Codes: M BLK04M + G BLK04G + B BLK04B | Mosaic Codes: G BLK4GM | Fitting Codes: M BLK4MS

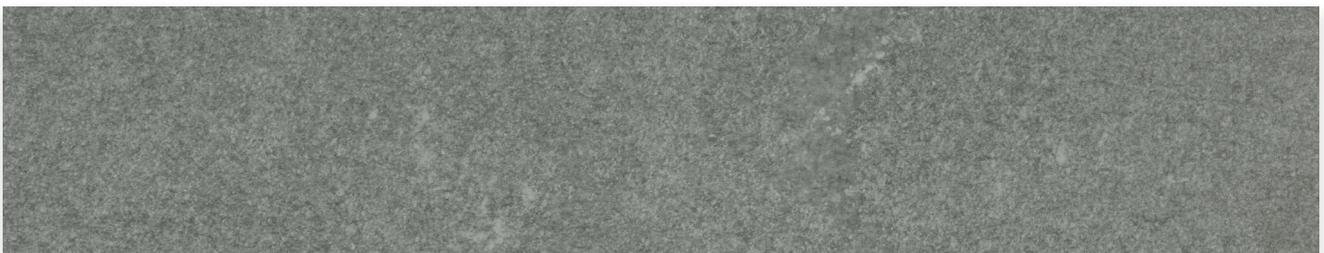

### CHARCOAL LRV: 19 PEI: III

Product Codes: M BLK05M + G BLK05G + B BLK05B | Mosaic Codes: G BLK5GM | Fitting Codes: M BLK5MS



## Technical, Sustainability & Important Information

### Specification

Range	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Blake	Matt	Internal & External	Internal Only	-	V4	Glazed Porcelain (Bla)
	Grip	Internal & External	Internal & External	Yes	V4	Glazed Porcelain (Bla)
	Bush Hammered	Internal & External	Internal & External	Yes	V4	Glazed Porcelain (Bla)

### Floor Values

Finish	Structure	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
Matt	-	Steel & Charcoal	Dry 36+ Wet 36+	-	R10	B	III	Light Commercial
	-	All Other Colours	Dry 36+ Wet 36+	-	R10	B	IV	Commercial
Grip	-	Steel & Charcoal	Dry 36+ Wet 36+	Wet 36+	R11	C	III	Light Commercial
	-	All Other Colours	Dry 36+ Wet 36+	Wet 36+	R11	C	IV	Commercial
Bush Hammered	-	Steel & Charcoal	Dry 36+ Wet 36+	Wet 36+	R11	C	III	Light Commercial
	-	All Other Colours	Dry 36+ Wet 36+	Wet 36+	R11	C	IV	Commercial

### Physical Properties

Test & Standard	Requirement	Test Result	Test & Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm <sup>2</sup>	Pass
Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Pass
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Pass
Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	Pass	Fire Rating	-	Class A I FL Non Combustible
Weight / M <sup>2</sup>	16.89kg 8.3mm thick	17.25kg 7.8mm thick	15.80kg 7.2mm thick	12.30kg 6mm thick	

### Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Blake	Glazed Porcelain (Bla)	-	Up to 10%	Up to 100% (Boxes)	Up to 100%

**Note:** Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications.

Please contact our technical helpline, or visit our website for specification and installation advice. All glazed porcelain (Bla) products listed conform to BS EN 14411.

CSV: Colour Shade Variation. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

For a full overview of our environmental credentials please visit [www.johnson-tiles.com/about/sustainability](http://www.johnson-tiles.com/about/sustainability). EPD: Environmental Product Declaration.

### Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed. For a comprehensive colour, size and finish overview along with full technical and sustainability information for all of the product shown in this product presenter, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com).

- All sizes shown are metric modular.
- For specific suitability details please contact our technical department.
- Johnson Tiles cannot accept responsibility for tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does/will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2022 Johnson Tiles. All rights reserved.



All product technical values quoted in this product presenter are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles are British Standard registered and all products conform to the standards set in BS EN 14411.

For the reassurance of single-source supply, Johnson Tiles offers a free of charge NBS M40 specification writing service featuring the Norcros Adhesives range of tile fixing products. To find out more or for any questions or queries relating to any tile related technical information featured in this product presenter, please contact our technical advice helpline on +44 (0) 1782 524 111 or email [ddunlop@johnson-tiles.com](mailto:ddunlop@johnson-tiles.com)

The colours shown in this sample tile wallet and attached booklet are as accurate as printing processes will allow. Please refer to actual product samples before specifying. Every effort has been made to ensure the accuracy of the information given.

For more information about Blake or any  
of our other product ranges simply visit

[www.johnson-tiles.com](http://www.johnson-tiles.com) | [f](#) [t](#) [i](#) [p](#) [in](#) [v](#)

#### Where To Find & Contact Us

##### Johnson Tiles Head Office

Harewood Street, Tunstall,  
Stoke on Trent, Staffordshire,  
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575

Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)

[www.johnson-tiles.com](http://www.johnson-tiles.com)

---

##### Material Lab Studio

10 Great Titchfield Street,  
London, W1W 8BB,  
United Kingdom

Tel: +44 (0)20 7436 8629

Email: [info@material-lab.co.uk](mailto:info@material-lab.co.uk)

[www.material-lab.co.uk](http://www.material-lab.co.uk)

---

##### Johnson Tiles Factory Outlet

Tel: +44 (0)1782 524 040

Email: [foutlet@johnson-tiles.com](mailto:foutlet@johnson-tiles.com)

[www.outlet.johnson-tiles.com](http://www.outlet.johnson-tiles.com)

---

##### Customer Services

Tel: +44 (0)1782 524 000

Email: [sales@johnson-tiles.com](mailto:sales@johnson-tiles.com)

---

##### Order A Sample

Tel: +44 (0)1782 524 043

Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

##### Technical Advice

Tel: +44 (0)1782 524 111

Email: [ddunlop@johnson-tiles.com](mailto:ddunlop@johnson-tiles.com)

---

Launched: March 2022

**JOHNSON • TILES**   
MADE IN THE UK SINCE 1901

Johnson Tiles is a division of Norcross Group (Holdings) Limited,  
Ladyfield House, Station Road, Wilmslow, Cheshire, SK9 1BU,  
United Kingdom. Registered in England number 566694.