

METHOD

PORCELAIN | FLOOR & WALL TILES

COLOUR SELECT



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

METHOD



7 SIZES




5 COLOURS



2 FINISHES

This timeless range lends itself to a minimalistic setting, with clean lines and a modern colour palette providing an architectural aesthetic, ideal for commercial interiors. Method is comprised of five calming and simplistic tones with a square mosaic available to easily create a focal point within the space. All colours in the Natural finish in 600x300mm and 600x600mm are stocked in the UK for seamless installation.

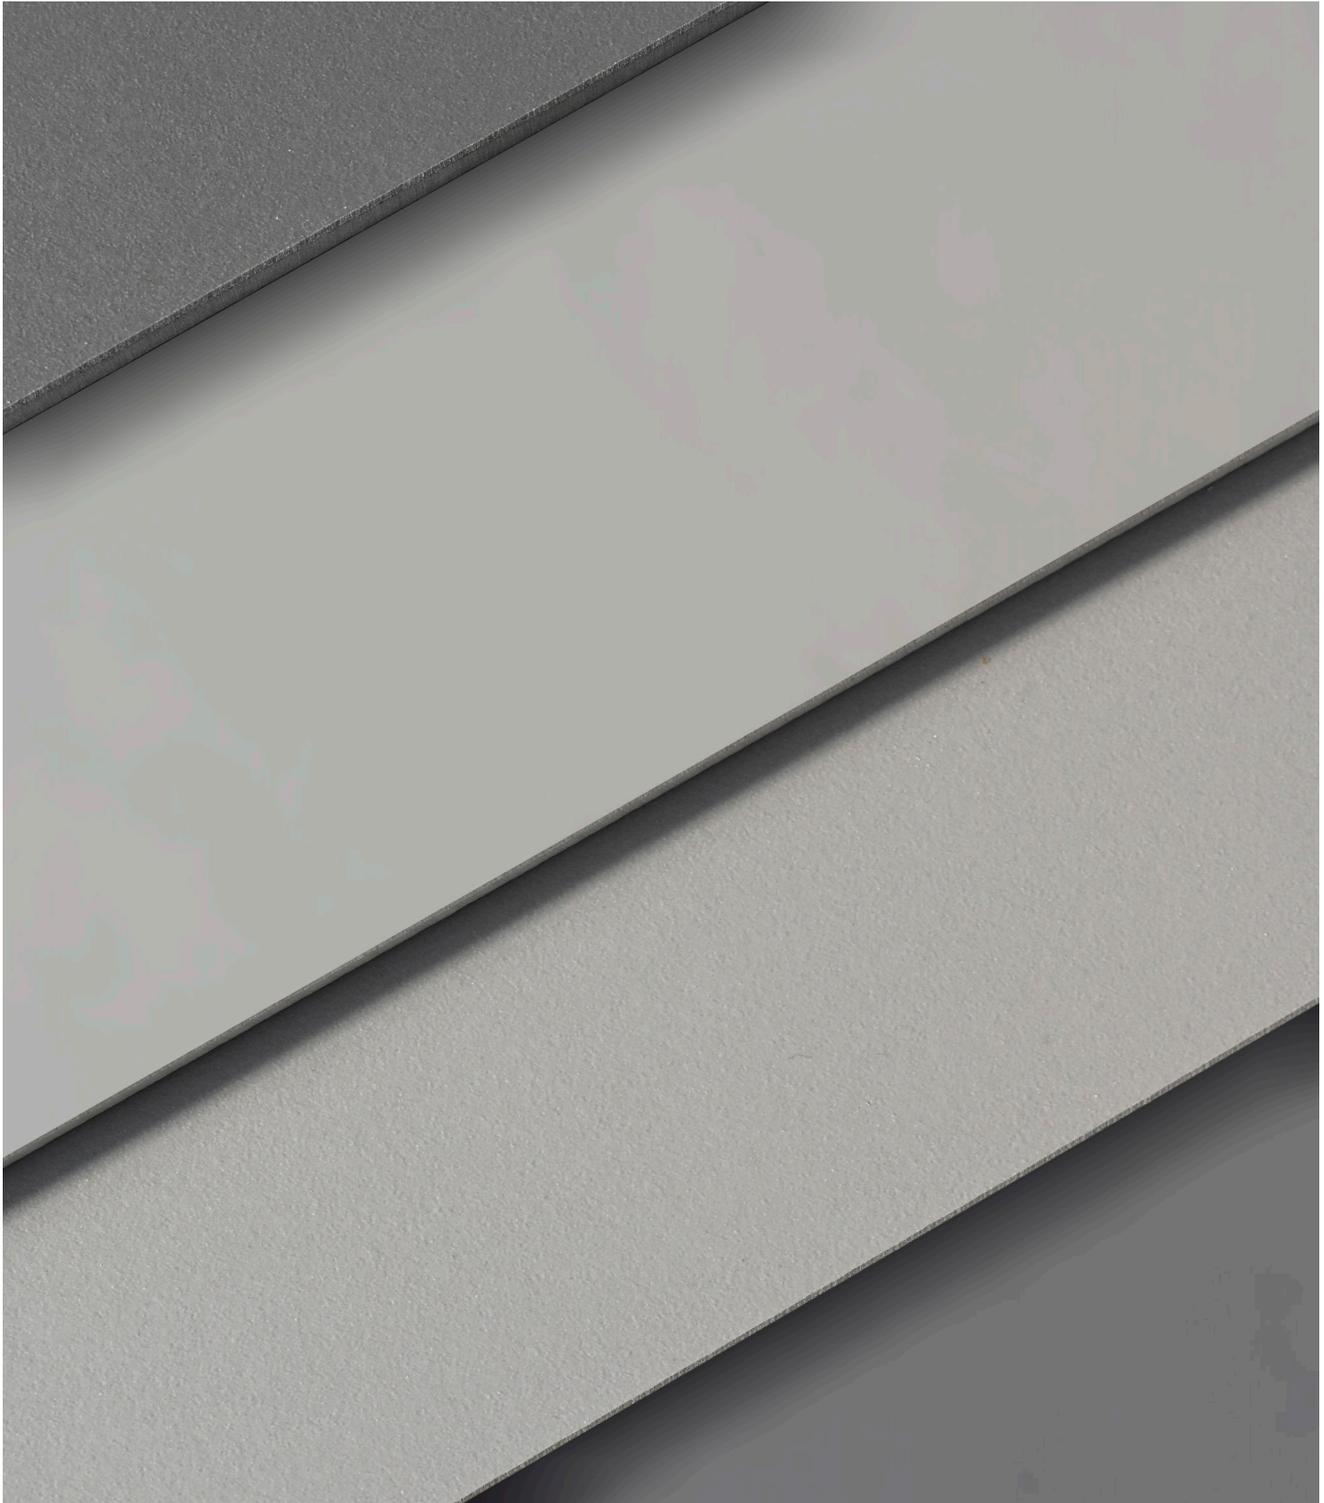




White Lapato 900x900x10.5mm - MTH01L



Steel Natural 1500x750x10.5mm - MTH04N

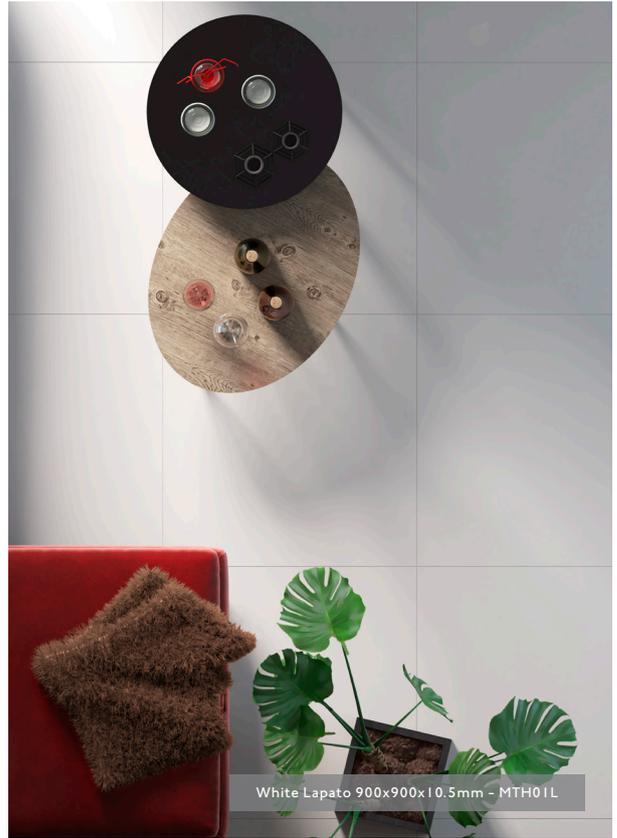



White Lapato 900x900x10.5mm - MTH01L



Silver Natural 900x900x10.5mm - MTH03N



Size Formats Sizing & Packing Information

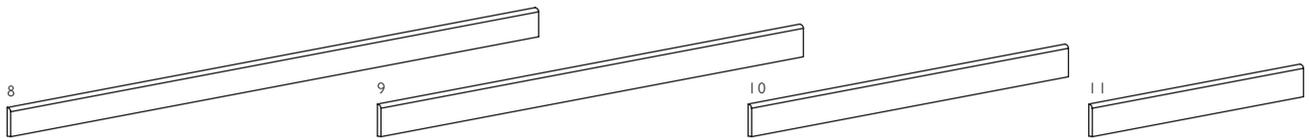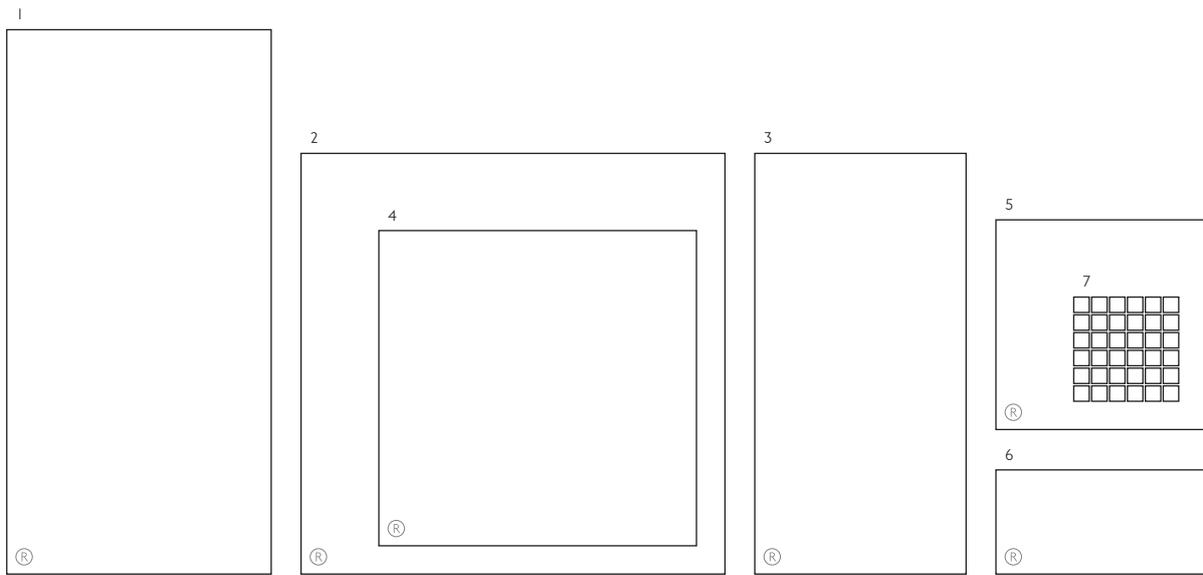


#	Size	Thickness	Finish	Structure	Colour Availability	Pcs / Box	M2 / Box	Kg / Box
1	1500x750mm	10.5mm	(N) Natural	-	All Colours	1 Tile	1.13m ²	28.00kg
			(L) Lapato	-	All Colours	1 Tile	1.13m ²	28.00kg
2	1200x1200mm	10.7mm	(N) Natural	-	All Colours	1 Tile	1.44m ²	38.40kg
			(L) Lapato	-	All Colours	1 Tile	1.44m ²	38.40kg
3	1200x600mm	10.5mm	(N) Natural	-	All Colours	2 Tiles	1.44m ²	34.00kg
			(L) Lapato	-	All Colours	2 Tiles	1.44m ²	34.00kg
4	900x900mm	10.5mm	(N) Natural	-	All Colours	2 Tiles	1.62m ²	28.00kg
			(L) Lapato	-	All Colours	2 Tiles	1.62m ²	28.00kg
5	600x600mm	9.5mm	(N) Natural	-	All Colours	4 Tiles	1.44m ²	31.40kg
			(L) Lapato	-	All Colours	4 Tiles	1.44m ²	31.40kg
6	600x300mm	9.5mm	(N) Natural	-	All Colours	7 Tiles	1.26m ²	22.00kg
			(L) Lapato	-	All Colours	7 Tiles	1.26m ²	22.00kg
7	300x300mm (50x50mm) Square Mosaic	8mm	(N) Natural	-	All Colours	11 Sheets	0.99m ²	23.00kg
			(L) Lapato	-	All Colours	11 Sheets	0.99m ²	23.00kg
#	Fitting	Thickness	Finish	Structure	Colour Availability	Pcs / Box	LM / Box	Kg / Box
8	1500x80mm Round Top Skirting	9mm	(N) Natural	-	All Colours	6 Tiles	0.90lm	17.50kg
9	1200x90mm Round Top Skirting	10.7mm	(N) Natural	-	All Colours	10 Tiles	12.00lm	28.00kg
10	900x90mm Round Top Skirting	10.5mm	(N) Natural	-	All Colours	11 Tiles	9.90lm	21.00kg
11	600x90mm Round Top Skirting	9.5mm	(N) Natural	-	All Colours	18 Tiles	10.80lm	24.14kg

Note: All sizes indicated are metric modular. All sizes shown are nominal. (R) Rectified Edge.
For the most up-to-date product availability information for this range, please visit our website - www.johnson-tiles.com



Colours & Product Codes

V2: Low to Moderate Shade Variation



WHITE (LRV: 65)

Product Codes: **N** MTH01N + **L** MTH01L

Mosaic Codes: **N** MTH1NM + **L** MTH1LM | Fitting Codes: **N** MTH1NS



BONE (LRV: 53)

Product Codes: **N** MTH02N + **L** MTH02L

Mosaic Codes: **N** MTH2NM + **L** MTH2LM | Fitting Codes: **N** MTH2NS



SILVER (LRV: 38)

Product Codes: **N** MTH03N + **L** MTH03L

Mosaic Codes: **N** MTH3NM + **L** MTH3LM | Fitting Codes: **N** MTH3NS



Colours & Product Codes

V2: Low to Moderate Shade Variation



STEEL LRV: 21

Product Codes: N MTH04N + L MTH04L


Mosaic Codes: N MTH4NM + L MTH4LM | Fitting Codes: N MTH4NS



MINK LRV: 24

Product Codes: N MTH05N + L MTH05L

Mosaic Codes: N MTH5NM + L MTH5LM | Fitting Codes: N MTH5NS

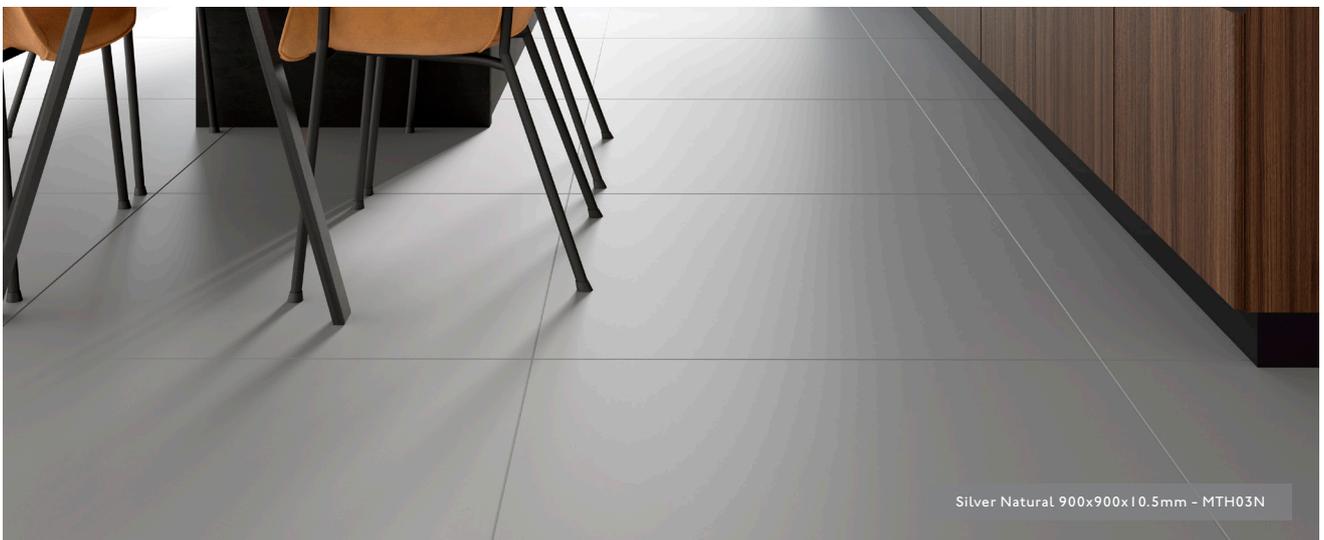

Silver Natural 900x900x10.5mm - MTH03N



Technical, Sustainability & Important Information

Specification

Range	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Method	Natural	Internal & External	Internal Only	-	V2	Porcelain (Bla)
	Lapato	Internal & External	Internal Only	-	V2	Porcelain (Bla)

Floor Values

Finish	Structure	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
Natural	-	All Colours	Dry 36+ Wet 36+	-	R 10	B	-	Commercial
Lapato	-	All Colours	Dry 36+ Wet 0 - 24	-	-	-	-	Commercial

Physical Properties

Test & Standard	Requirement	Test Result	Test & Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm ²	35 - 45N / mm ²
Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Pass
Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.1\%$	Fire Rating	-	Class A I FL Non Combustible
Weight / M ²	26.67kg 10.7mm thick	24.89kg 10.5mm thick	21.81kg 9.5mm thick	23.24kg 8mm thick	

Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Method	Porcelain (Bla)	Yes	Up to 40%	Up to 20%	Up to 100%

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All porcelain (Bla) products listed conform to BS EN 14411. CSV: Colour Shade Variation. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed. For a comprehensive colour, size and finish overview along with full technical and sustainability information for all of the product shown in this product presenter, please visit our website - www.johnson-tiles.com.

- All sizes shown are metric modular.
- For specific suitability details please contact our technical department.
- Johnson Tiles cannot accept responsibility for tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does/will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2022 Johnson Tiles. All rights reserved.



All product technical values quoted in this product presenter are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles are British Standard registered and all products conform to the standards set in BS EN 14411.

For the reassurance of single-source supply, Johnson Tiles offers a free of charge NBS M40 specification writing service featuring the Norcros Adhesives range of tile fixing products. To find out more or for any questions or queries relating to any tile related technical information featured in this product presenter, please contact our technical advice helpline on +44 (0) 1782 524 111 or email ddunlop@johnson-tiles.com

The colours shown in this sample tile wallet and attached booklet are as accurate as printing processes will allow. Please refer to actual product samples before specifying. Every effort has been made to ensure the accuracy of the information given.

For more information about Method or any
of our other product ranges simply visit

www.johnson-tiles.com | [f](#) [t](#) [i](#) [p](#) [in](#) [v](#)

Where To Find & Contact Us

Johnson Tiles Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Johnson Tiles Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice

Tel: +44 (0)1782 524 111
Email: ddunlop@johnson-tiles.com

Launched: March 2022

JOHNSON • TILES 
MADE IN THE UK SINCE 1901

Johnson Tiles is a division of Norcross Group (Holdings) Limited,
Ladyfield House, Station Road, Wilmslow, Cheshire, SK9 1BU,
United Kingdom. Registered in England number 566694.