









BELLAGIO


Taking inspiration from traditional Venetian terrazzo, Bellagio showcases a shimmering effect to emulate terrazzo fragments. With the appearance of embedded glass, Bellagio offers 5 neutral colours of Off White, Beige, Grey, Taupe and Graphite. Opt for an injection of bold colour with multicolour drops options in Off White, Grey, and Graphite. Or tap into the ever-popular Geometrics trend with Bit Décor and Rhombus Décor to add distinctive patterning. With all products available in the small format size of 185x185mm, Bellagio is versatile and impactful.

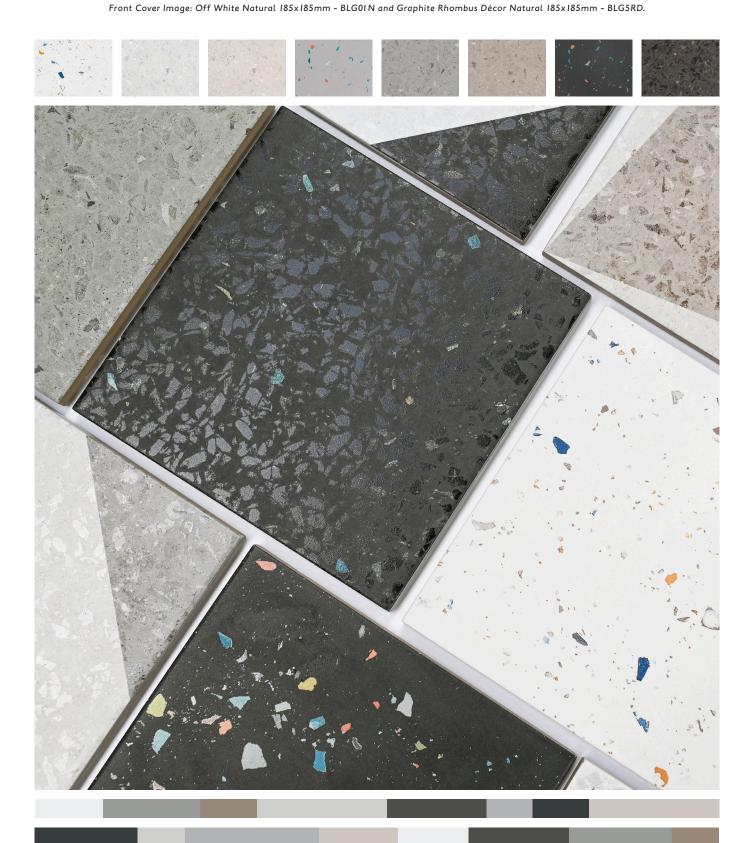



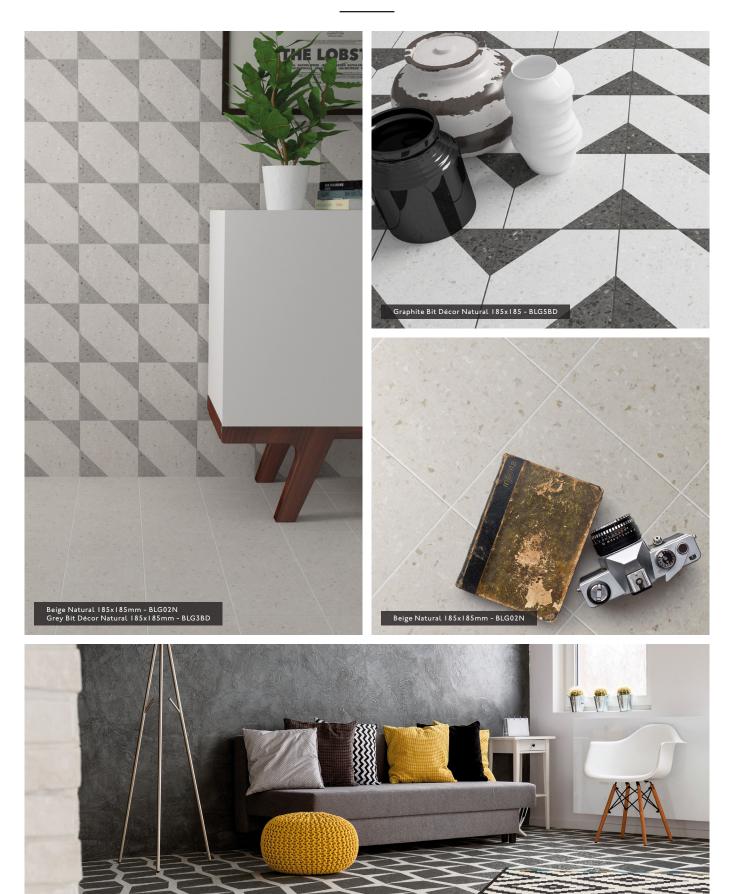


Graphite Rhombus Décor Natural 185x185 - BLG5RD

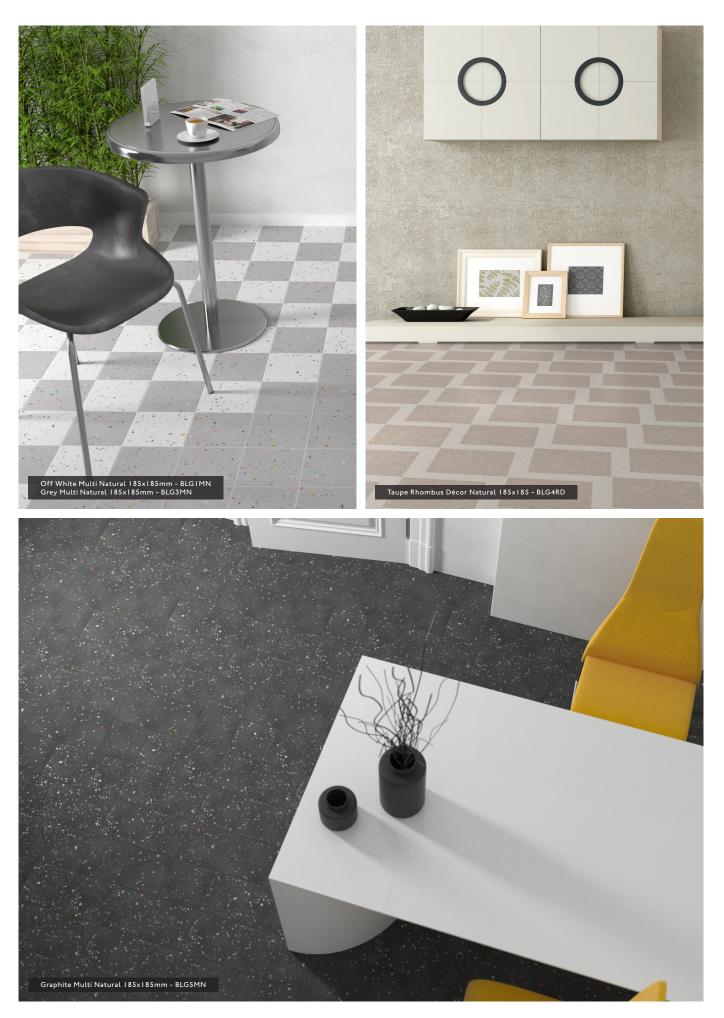



Colours & Product Codes V2: Low to Moderate Shade Variation



OFF WHITE MULTI LRV: 65 Product Code: N BLG I MN PEI: IV



GREY MULTI (LRV: 39) Product Code: N BLG3MN (PEI: III)



GRAPHITE MULTI LRV: 10 Product Code: N BLG5MN PEI: II



OFF WHITE LRV: 57 Product Code: N BLG01N PEI: IV



BEIGE (LRV: 54) Product Code: N BLG02N (PEI: IV)



GREY LRV: 32 Product Code: N BLG03N PEI: 111



 TAUPE
 LRV: 40

 Product Code:
 N
 BLG04N
 PEI: III



GRAPHITE LRV: 08 Product Code: N BLG05N PEI: II



GREY BIT DÉCOR Product Code: N BLG3BD PELIII



GREY RHOMBUS DÉCOR Product Code: N BLG3RD PELIII



TAUPE BIT DÉCOR Product Code: N BLG4BD PELIII



 TAUPE

 RHOMBUS DÉCOR

 Product Code:
 N BLG4RD
 PEI: III



GRAPHITE BIT DÉCOR Product Code: N BLG5BD PEL: II




GRAPHITE RHOMBUS DÉCOR Product Code: N BLG5RD PEL: II




|--|--|

Size Formats Finishes & Availability



#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
I.	185x185mm	N Natural	All Colours Shown	10mm	12 Tiles	0.41 m ²	8.89 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

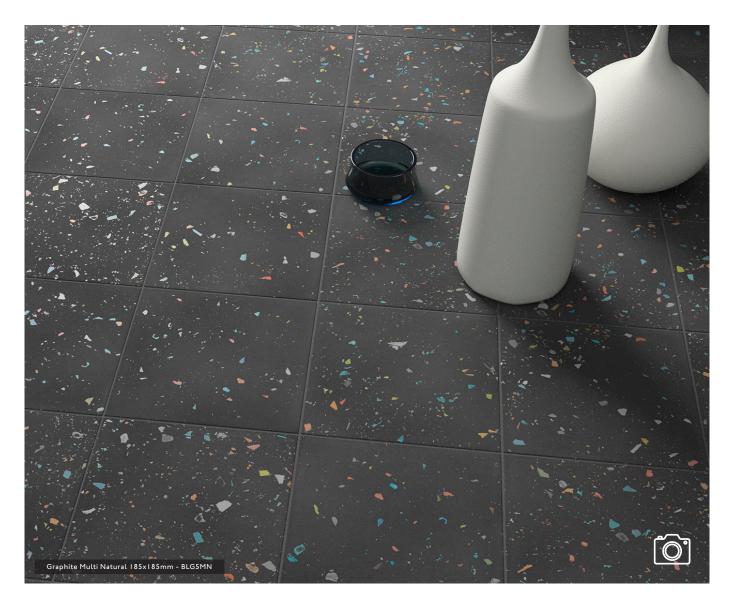

i Technical Information

Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Bellagio	All Sizes Shown ℕ	Internal & External	Internal Only	-	V2	Glazed Porcelain [BIa]

Note: CSV: Colour Shade Variation. Key to Finishes: ℕ Natural

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
	Off White & Beige	Dry 36+ Wet 25 - 35	-	R9	-	IV	Commercial
N Natural	Grey & Taupe	Dry 36+ Wet 25 - 35	-	R9	-	III	Light Commercial
	Graphite	Dry 36+ Wet 25 - 35	-	R9	-	 II	Domestic

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV (45): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	± 0.6% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm²	Pass
→ Thickness EN ISO I 0545 - 2	± 5% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	±0.5% ≤ ±1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
► Surface Flatness ► ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	≤ 0.5%	Pass	Fire Rating	-	Class A1⊧∟ Non Combustible
kg Weight / M ²	22.01 kg 10mm thick				

Note: All glazed porcelain [Bla] products shown in this range overview conform to BS EN 14411.

✓ Sustainability Information

Range		EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Bellagio	Glazed Porcelain [BIa]	Yes	Up to 60%	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

• All sizes shown are metric modular.

- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



Product Notes

For more information about Bellagio or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ @ ? in ₽

Where To Find Us

Johnson Tiles Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043 Fax: +44 (0)1782 577 379 Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111 Fax: +44 (0)1782 577 379 Email: techadvice@johnson-tiles.com

Launched: October 2021

