

# THREADS

GLAZED CERAMIC | WALL TILES

PATTERNED TILES

INTRO



JOHNSON • TILES 

MADE IN THE UK SINCE 1901



# THREADS

This ceramic wall tile range provides a textured finish for a tactile quality. With a soft palette of 3 colours, including Cotton, Taupe, and Flax, Threads showcases a subtle stripe pattern to explore variation and depth.

*Front Cover Image: Cotton Satin 300x200mm - THRD1A*








## Roomset Photography

---



Cotton Satin 300x200mm - THRD1A

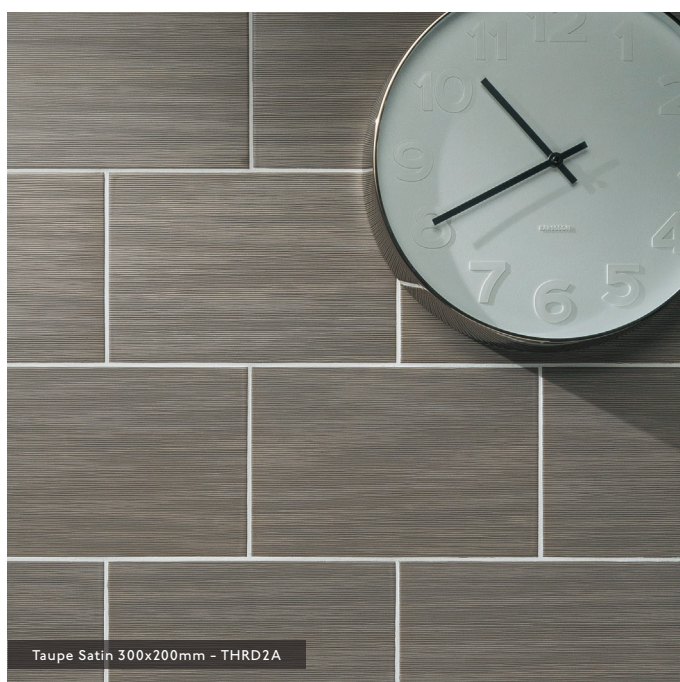

Taupe Satin 300x200mm - THRD2A



Flax Satin 300x200mm - THRD3A



## Colours & Product Codes

VI: Low Shade Variation



**COTTON**

[S] THRD1A LRV: 62



**TAUPE**

[S] THRD2A LRV: 31




**FLAX**

[S] THRD3A LRV: 12



## Sizes, Finishes & Availability

1



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	300x200mm	[S] Satin	All Colours Shown	8mm	17 Tiles	1.02 m <sup>2</sup>	14.00 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.





## Technical Data

### Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Threads	All Sizes Shown	Internal Only	-	-	VI	Glazed Ceramic [BIII]

### Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
<b>Length / Width</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\leq \pm 0.25\%$	<b>Modulus of Rupture</b> EN ISO 10545 - 4	Min. 15N / mm <sup>2</sup>	$\geq 25\text{N} / \text{mm}^2$
<b>Thickness</b> EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$	<b>Thermal Shock</b> EN ISO 10545 - 9	Pass	Pass
<b>Straightness of Side</b> EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.15\%$	<b>Frost Resistance</b> EN ISO 10545 - 12	-	Not Suitable
<b>Rectangularity</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$	<b>Chemical Resistance</b> EN ISO 10545 - 13	Min. Class B	Class A - B
<b>Surface Flatness</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.3\%$	<b>Stain Resistance</b> EN ISO 10545 - 14	Min. Class 3	Class 3
<b>Water Absorption</b> EN ISO 10545 - 3	10% to 20%	15% to 17%	<b>Fire Rating</b>	-	Class A1 Non Combustible
<b>Weight / M<sup>2</sup></b>	13.73 kg 8mm thick				

**Note:** All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

### Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD	SKA Rating
Threads	Glazed Ceramic [BIII]	Up to 20%	Up to 100%	Up to 100%	-	-

**Note:** EPD: Environmental Product Declaration for the products shown in this overview can be on the Threads pages on our website.

### Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Threads or any  
of our other product ranges simply visit  
**www.johnson-tiles.com** |      

#### **Where To Find Us**

##### **Johnson Tiles**

Harewood Street,  
Tunstall,  
Stoke on Trent,  
Staffordshire,  
ST6 5JZ

Tel: +44 (0)1782 575 575  
Fax: +44 (0)1782 577 377  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)

---

##### **Samples Enquiries**

Tel: +44 (0)1782 524 043  
Fax: +44 (0)1782 577 379  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

##### **Technical Helpline**

Tel: +44 (0)1782 524 111  
Fax: +44 (0)1782 577 379  
Email: [techadvice@johnson-tiles.com](mailto:techadvice@johnson-tiles.com)

*Launched: July 2017*

**JOHNSON • TILES**   
MADE IN THE UK SINCE 1901