





# BASELINE

Baseline presents an elegant, neutral colour palette, with shades including the light, bright Powder to the deep, rich Shadow. Four mosaic options and two co-ordinated skirtings are also available to pair with the large format field tiles – with sizes from 600x300mm to 900x900mm.

Front Cover Image: Smoke Natural 900x900mm - BAS05N.

















#### POWDER LRV: 62

Product Code (All Sizes): 🛛 BASOIN ¦ Mosaic Product Code (All Sizes): 🔊 BASINM



BISCUIT LRV: 39

Product Code (All Sizes): N BAS02N ¦ Mosaic Product Code (All Sizes): N BAS2NM



Product Code (All Sizes): N BAS03N ¦ Mosaic Product Code (All Sizes): N BAS3NM



FOSSIL LRV: 18

Product Code (All Sizes): 🛛 BAS04N ¦ Mosaic Product Code (All Sizes): 🕅 BAS4NM




SMOKE LRV: 18
Product Code (All Sizes): N BAS55NM



 SHADOW
 LRV: 10

 Product Code (All Sizes):
 N
 BAS06N
 +
 Mosaic Product Code (All Sizes):
 N
 BAS6NM

**Size Formats** Finishes & Availability

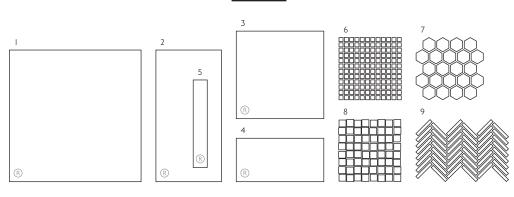

#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	900x900mm	N Only	All Colours Shown	9mm	2 Tiles	1.61 m <sup>2</sup>	34.00 kg
2	900x450mm	N Only	All Colours Shown	9mm	3 Tiles	1.21 m²	25.50 kg
3	600x600mm	N Only	All Colours Shown	9mm	3 Tiles	1.07 m <sup>2</sup>	23.22 kg
4	600x300mm	N Only	All Colours Shown	9mm	6 Tiles	1.07 m <sup>2</sup>	22.00 kg
5	600x100mm	N Only	All Colours Shown	9mm	10 Tiles	0.59 m²	13.30 kg

#	Mosaics	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
6	25x25mm Square Mosaic Sheet: 300x300mm	N Only	All Colours Shown	9mm	5 Sheets	0.44 m²	9.00 kg
7	<b>70x60mm</b> Hexagon Mosaic Sheet: 300x300mm	N Only	All Colours Shown	9mm	5 Sheets	0.33 m²	6.50 kg
8	37x37mm Moved Mosaic Sheet: 300x300mm	N Only	All Colours Shown	9mm	5 Sheets	0.44 m²	9.00 kg
9	Herringbone Mosaic Sheet: 450x300mm	N Only	All Colours Shown	9mm	5 Sheets	0.47 m²	10.75 kg


Key to Finishes: 🔊 Natural

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. (R) Rectified Edge





### **Additional Fittings** Finishes & Availability

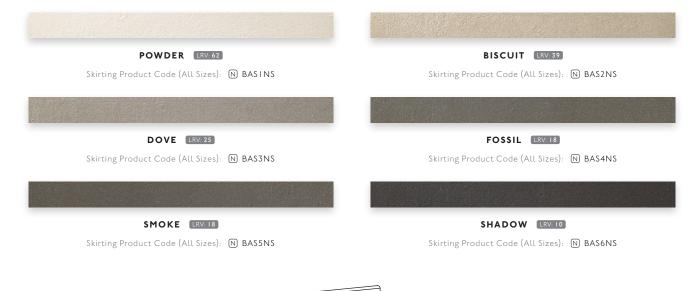




#	Fittings	Finish lype	Colour Availability	lhickness	Pz / Box	Lm / Box	Kg / Box
I	900x50mm Bevel Top Skirting	N Only	All Colours Shown	9mm	5 Tiles	4.50 lm	5.50 kg
2	600x50mm Bevel Top Skirting	N Only	All Colours Shown	9mm	5 Tiles	3.00 lm	3.00 kg

Key to Finishes: ℕ Natural

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

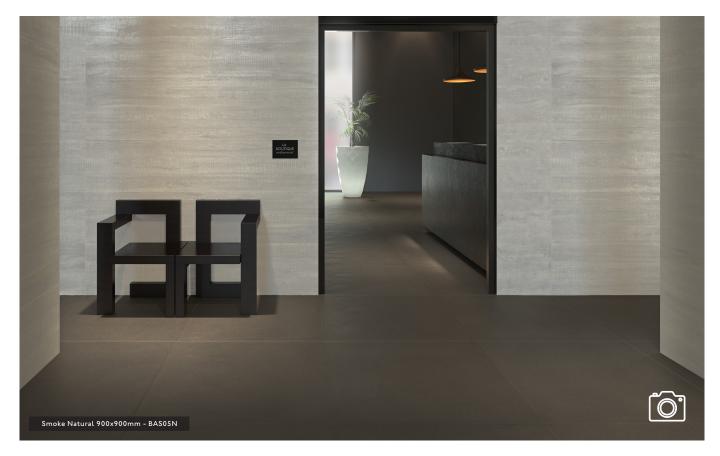

## i Technical Information

#### Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Baseline	All Sizes Shown ℕ	Internal & External	Internal Only	-	V2	Porcelain [Bla]

#### Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
	01 & 06 Only	Dry 36+ Wet 0 - 24	-	RIO	В	-	Commercial
Ν Natural	All Other Colours	Dry 36+ Wet 25 - 35	-	RIO	В	-	Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. CSV: Colour Shade Variation. PTV (4S): Pendulum Test Value – Slider 96. PTV (TRL): Pendulum Test Value – Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

#### Physical Properties - Porcelain [Bla]

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	± 0.6% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm²	≥ 52N / mm²
→ Thickness EN ISO 10545 - 2	± 5% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	± 0.5% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Pass
→ Surface Flatness EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	≤ 0.5%	≤ 0.5%	Fire Rating	-	Class AIFL Non Combustible
kg Weight / M <sup>2</sup>	<b>2 I.I 9 kg</b> 9mm thick				

Note: All Porcelain [BIa] products listed in this overview conform to BS EN 14411.

#### ✓ Sustainability Information

Range		EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Baseline	Porcelain [BIa]	Yes	Up to 30%	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: EPD: Environmental Product Declaration for the products shown in this overview can be found on the Baseline pages on our website.

#### Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

• All sizes shown are metric modular.

- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



Product Notes For more information about Baseline or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ @ ? in D

#### Where To Find Us

Johnson Tiles Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

#### Samples Enquiries

Tel: +44 (0)1782 524 043 Fax: +44 (0)1782 577 379 Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111 Fax: +44 (0)1782 577 379 Email: techadvice@johnson-tiles.com

Launched: May 2016 Updated: October 2021

