

ARTISAN

PORCELAIN | FLOOR & WALL TILES

WOOD

SHAPE

MOSAICS

ABSOLUTE



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

ARTISAN

Artisan offers a stunning woodgrain surface design, with 6 colour options to choose from, ranging from White Oak to Walnut. Natural and Grip finishes are available, with the Grip finish providing a PTV slip resistance rating of 36+. Try pairing different sizes with the two mosaic options to create distinctive designs.

Front Cover Image: Natural Oak Natural 1800x200mm - ARN03N.



Hickory Natural 1200x200mm - ARN04N



White Oak Natural 1800x200mm - ARN01N



Natural Oak Natural 1200x200mm - ARN03N



White Oak Natural 900x150mm - ARN01N




Highland Ash Natural 300x300mm Strip Mosaic - ARN2NM



Walnut Natural 1200x200mm - ARN06N



Natural Oak Natural 1200x200mm - ARN03N

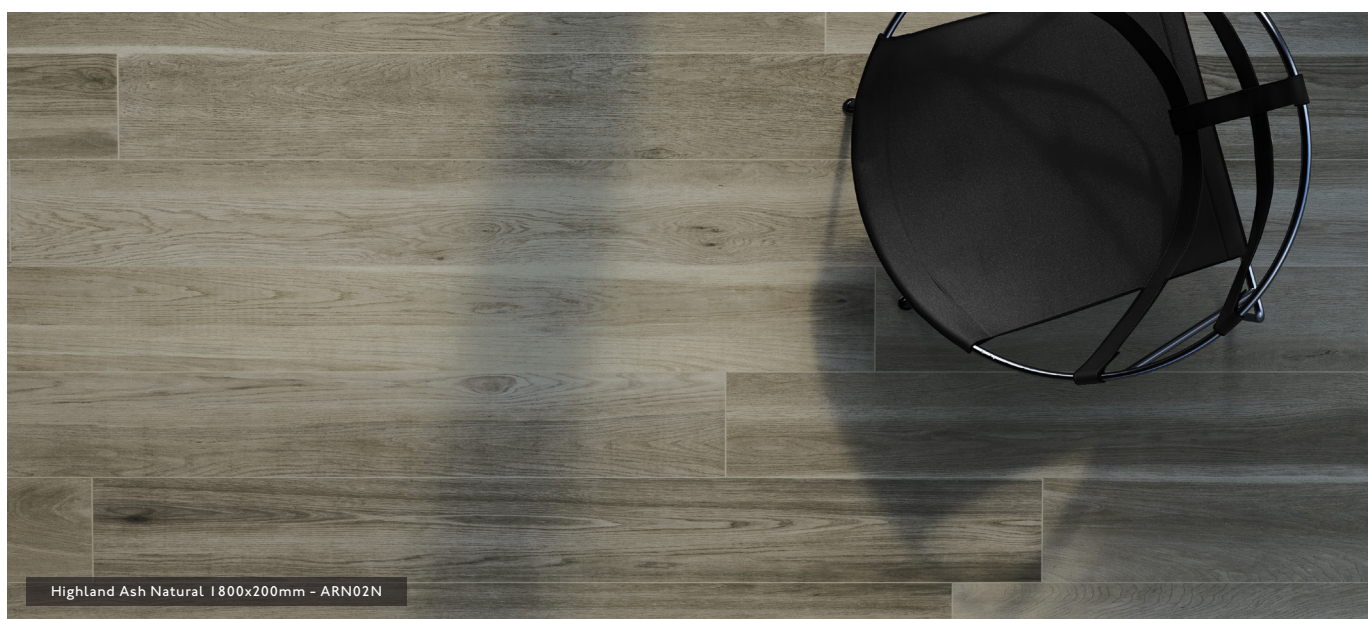

Highland Ash Natural 1800x200mm - ARN02N



Colours & Product Codes

V2: Low to Moderate Shade Variation



WHITE OAK LRV: 55

Product Codes (All Sizes): **N** ARN01N + **N** ARN1CA Chevron Left + **N** ARN1CB Chevron Right + **G** ARN01G

Mosaic Product Code (All Sizes): **N** ARN1NM



HIGHLAND ASH LRV: 42

Product Codes (All Sizes): **N** ARN02N + **N** ARN2CA Chevron Left + **N** ARN2CB Chevron Right + **G** ARN02G

Mosaic Product Code (All Sizes): **N** ARN2NM



NATURAL OAK LRV: 36

Product Codes (All Sizes): **N** ARN03N + **N** ARN3CA Chevron Left + **N** ARN3CB Chevron Right + **G** ARN03G

Mosaic Product Code (All Sizes): **N** ARN3NM



HICKORY LRV: 26

Product Codes (All Sizes): **N** ARN04N + **N** ARN4CA Chevron Left + **N** ARN4CB Chevron Right + **G** ARN04G

Mosaic Product Code (All Sizes): **N** ARN4NM



ASPEN LRV: 18

Product Codes (All Sizes): **N** ARN05N + **N** ARN5CA Chevron Left + **N** ARN5CB Chevron Right + **G** ARN05G

Mosaic Product Code (All Sizes): **N** ARN5NM



WALNUT LRV: 12


Product Codes (All Sizes): **N** ARN06N + **N** ARN6CA Chevron Left + **N** ARN6CB Chevron Right + **G** ARN06G

Mosaic Product Code (All Sizes): **N** ARN6NM



Size Formats

Finishes & Availability

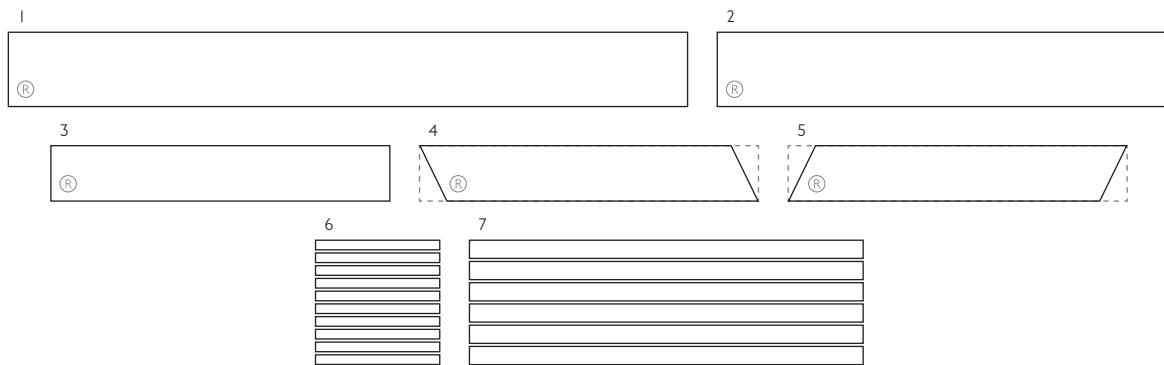


#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	1800x200mm	Only	All Colours Shown	9mm	3 Tiles	1.07 m ²	22.65 kg
2	1200x200mm	+	All Colours Shown	9mm	5 Tiles	1.19 m ²	25.15 kg
3	900x150mm	Only	All Colours Shown	11mm	7 Tiles	0.93 m ²	20.30 kg
4	900x150mm Chevron Left	Only	All Colours Shown	11mm	7 Tiles	0.84 m ²	17.50 kg
5	900x150mm Chevron Right	Only	All Colours Shown	11mm	7 Tiles	0.84 m ²	17.50 kg

#	Mosaics	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
6	300x30mm Strips Mosaic Sheet: 300x300mm	Only	All Colours Shown	9mm	5 Sheets	0.44 m ²	10.50 kg
7	900x50mm Strips Mosaic Sheet: 900x300mm	Only	All Colours Shown	9mm	3 Sheets	0.81 m ²	18.30 kg

Key to Finishes: Natural Grip


Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. ALL LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. Rectified Edge

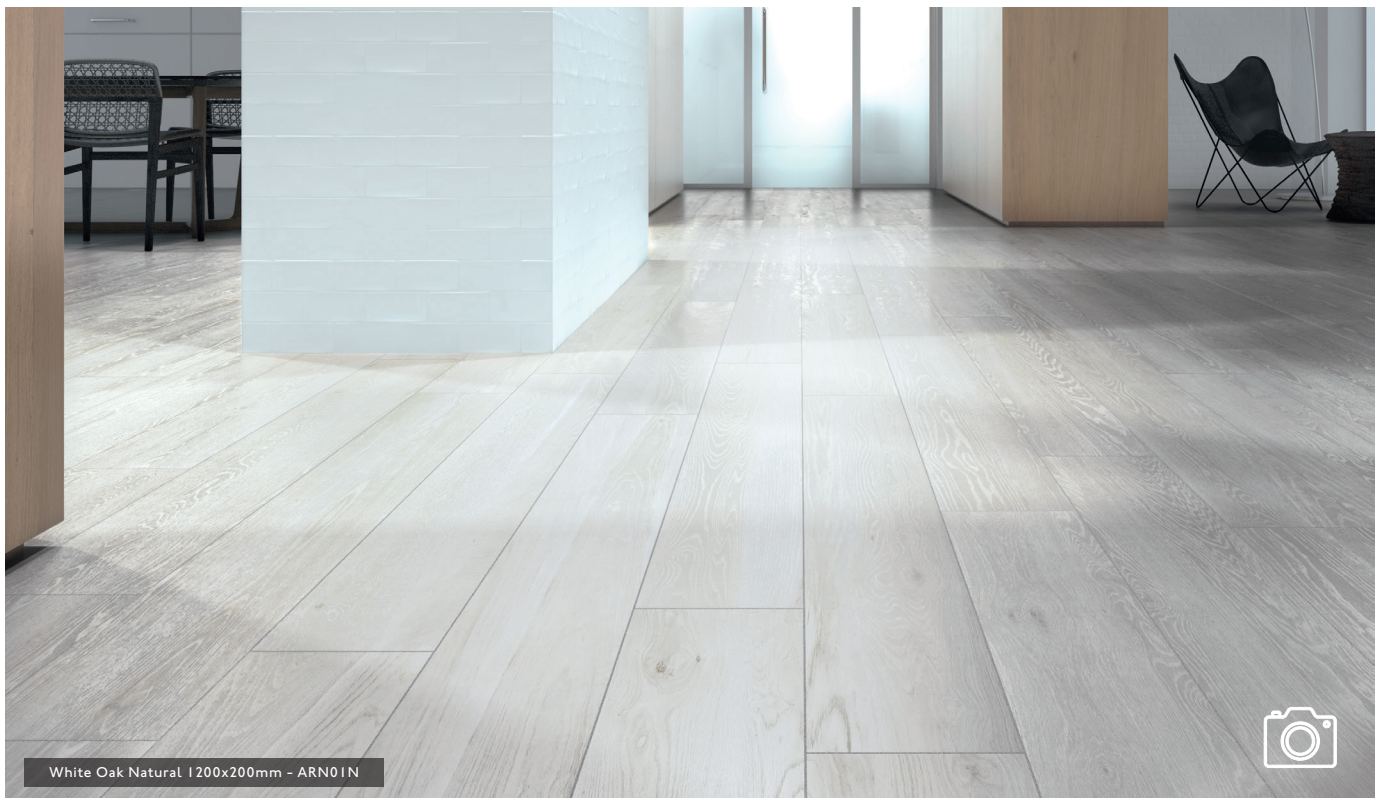

White Oak Natural 1200x200mm - ARN01N



Additional Fittings Finishes & Availability



WHITE OAK LRV: 55

Skirting Product Code (All Sizes): **N** ARN1NS



HIGHLAND ASH LRV: 42

Skirting Product Code (All Sizes): **N** ARN2NS



NATURAL OAK LRV: 55

Skirting Product Code (All Sizes): **N** ARN3NS



HICKORY LRV: 26

Skirting Product Code (All Sizes): **N** ARN4NS




ASPEN LRV: 18

Skirting Product Code (All Sizes): **N** ARN5NS



WALNUT LRV: 12

Skirting Product Code (All Sizes): **N** ARN6NS



#	Fittings	Finish Type	Colour Availability	Thickness	Pz / Box	Lm / Box	Kg / Box
1	1200x50mm Bevel Top Skirting	N Only	All Colours Shown	9mm	5 Tiles	6.00 lm	7.00 kg
2	900x50mm Bevel Top Skirting	N Only	All Colours Shown	9mm	5 Tiles	4.50 lm	5.50 kg

Key to Finishes: **N** Natural



Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.







Technical Information

Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Artisan	All Sizes Shown 	Internal & External	Internal Only	-	V2	Porcelain [Bla]
	All Sizes Shown 	Internal & External	Internal & External	Yes *	V2	Porcelain [Bla]














* Only Highland Ash, Natural Oak, Hickory, Aspen & Walnut colourways in the Grip finish are suitable for wet barefoot applications.

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
 Natural	All Colours Shown	Dry 36+ Wet 25 - 35	-	R9	A	-	Commercial
 Grip	01 Only	Dry 36+ Wet 36+	-	R11	C	-	Commercial
	All Other Colours	Dry 36+ Wet 36+	Wet 36+	R11	C	-	Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. CSV: Colour Shade Variation. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

Physical Properties - Porcelain [Bla]

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
 Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm ²	$\geq 52\text{N} / \text{mm}^2$
 Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545 - 9	Pass	Pass
 Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
 Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545 - 13	Min. Class B	Pass
 Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
 Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.5\%$	 Fire Rating	-	Class A1 _{FL} Non Combustible
 Weight / M²	21.19 kg 9mm thick	21.73 kg 11mm thick			

Note: All Porcelain [Bla] products listed in this overview conform to BS EN 14411.

Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Artisan	Porcelain [Bla]	Yes	Up to 30%	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: EPD: Environmental Product Declaration for the products shown in this overview can be found on the Artisan pages on our website.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.





Product Notes

Handwriting practice area with 20 sets of dashed lines on a solid background.

For more information about Artisan or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: March 2016 Updated: July 2021

JOHNSON • TILES 
MADE IN THE UK SINCE 1901