

KENSINGTON

GLAZED CERAMIC | WALL TILES

PLAIN COLOUR TILES



JOHNSON • TILES 
MADE IN THE UK SINCE 1901

KENSINGTON

Kensington is a stylish collection of rustic slim-format ceramic wall tiles. With a handcrafted effect, Kensington offers a cool colour palette exploring sea tones and fresh neutrals, with available colours ranging from wintry Snow to inky Coal and soft Sage. Experiment with Chalk, Storm, and Smoke for a colour graded tonal grey design.

Front Cover Image: Snow Gloss 250x50mm - KEN09A



Cloud Gloss 250x50mm - KEN10A






Roomset Photography





Colours & Product Codes

VI: Low Shade Variation



CHALK

Ⓜ KEN01A LRV: 74




CREAM

Ⓜ KEN03A LRV: 76



STORM

Ⓜ KEN04A LRV: 53



SMOKE

Ⓜ KEN05A LRV: 32



NUT

Ⓜ KEN06A LRV: 15



COAL

Ⓜ KEN08A LRV: 8



SNOW

Ⓜ KEN09A LRV: 86




CLOUD

Ⓜ KEN10A LRV: 63




NUDE

Ⓜ KEN11A LRV: 56



SAGE

Ⓜ KEN12A LRV: 42




DUCK EGG

Ⓜ KEN13A LRV: 55



Sizes, Finishes & Availability

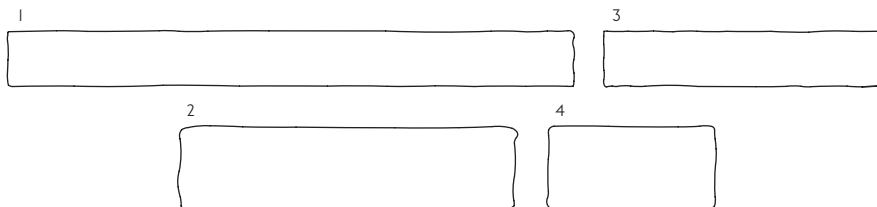

#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	500x50mm	Ⓜ Gloss	Snow, Nude, Sage, Cloud & Duck Egg Only	10mm	24 Tiles	0.60 m ²	10.01 kg
2	300x75mm	Ⓜ Gloss	Chalk, Cream, Storm, Smoke, Coal & Nut Only	10mm	19 Tiles	0.43 m ²	6.98 kg
3	250x50mm	Ⓜ Gloss	Snow, Nude, Sage, Cloud & Duck Egg Only	10mm	48 Tiles	0.60 m ²	9.93 kg
2	150x75mm	Ⓜ Gloss	Chalk, Cream, Storm, Smoke, Coal & Nut Only	10mm	38 Tiles	0.43 m ²	7.23 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Kensington	All Sizes Shown	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm ²	Pass
Thickness EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	10% to 20%	Pass	Fire Rating	-	Class A1 Non Combustible
Weight / M²	17.00 kg 10mm thick				

Note: All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD	SKA Rating
Kensington	Glazed Ceramic [BIII]	Up to 80%	-	-	Yes	-

Note: EPD: Environmental Product Declaration for the products shown in this overview can be on the Kensington pages on our website.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Kensington or
any of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: April 2019 - Updated: June 2023

JOHNSON • TILES 
MADE IN THE UK SINCE 1901