

MILANO

PORCELAIN | FLOOR & WALL TILES

COLOUR

ABSOLUTE




JOHNSON • TILES 

MADE IN THE UK SINCE 1901

MILANO

This architectural glazed porcelain collection showcases 6 colours taking inspiration from the natural world. The soothing block colours and multiple size formats can be combined to create striking visuals. Experiment with lay patterns and coloured grouts to bring this range to life even more. All 6 colourways achieve a PTV slip resistance rating of 36+, making Milano the perfect collection for commercial and residential interior projects.

Front Cover Image: Sky Natural 125x62mm - MIL02N, Chalk Natural 125x62mm - MIL01N and Basalt Natural 125x62mm - MIL06N.

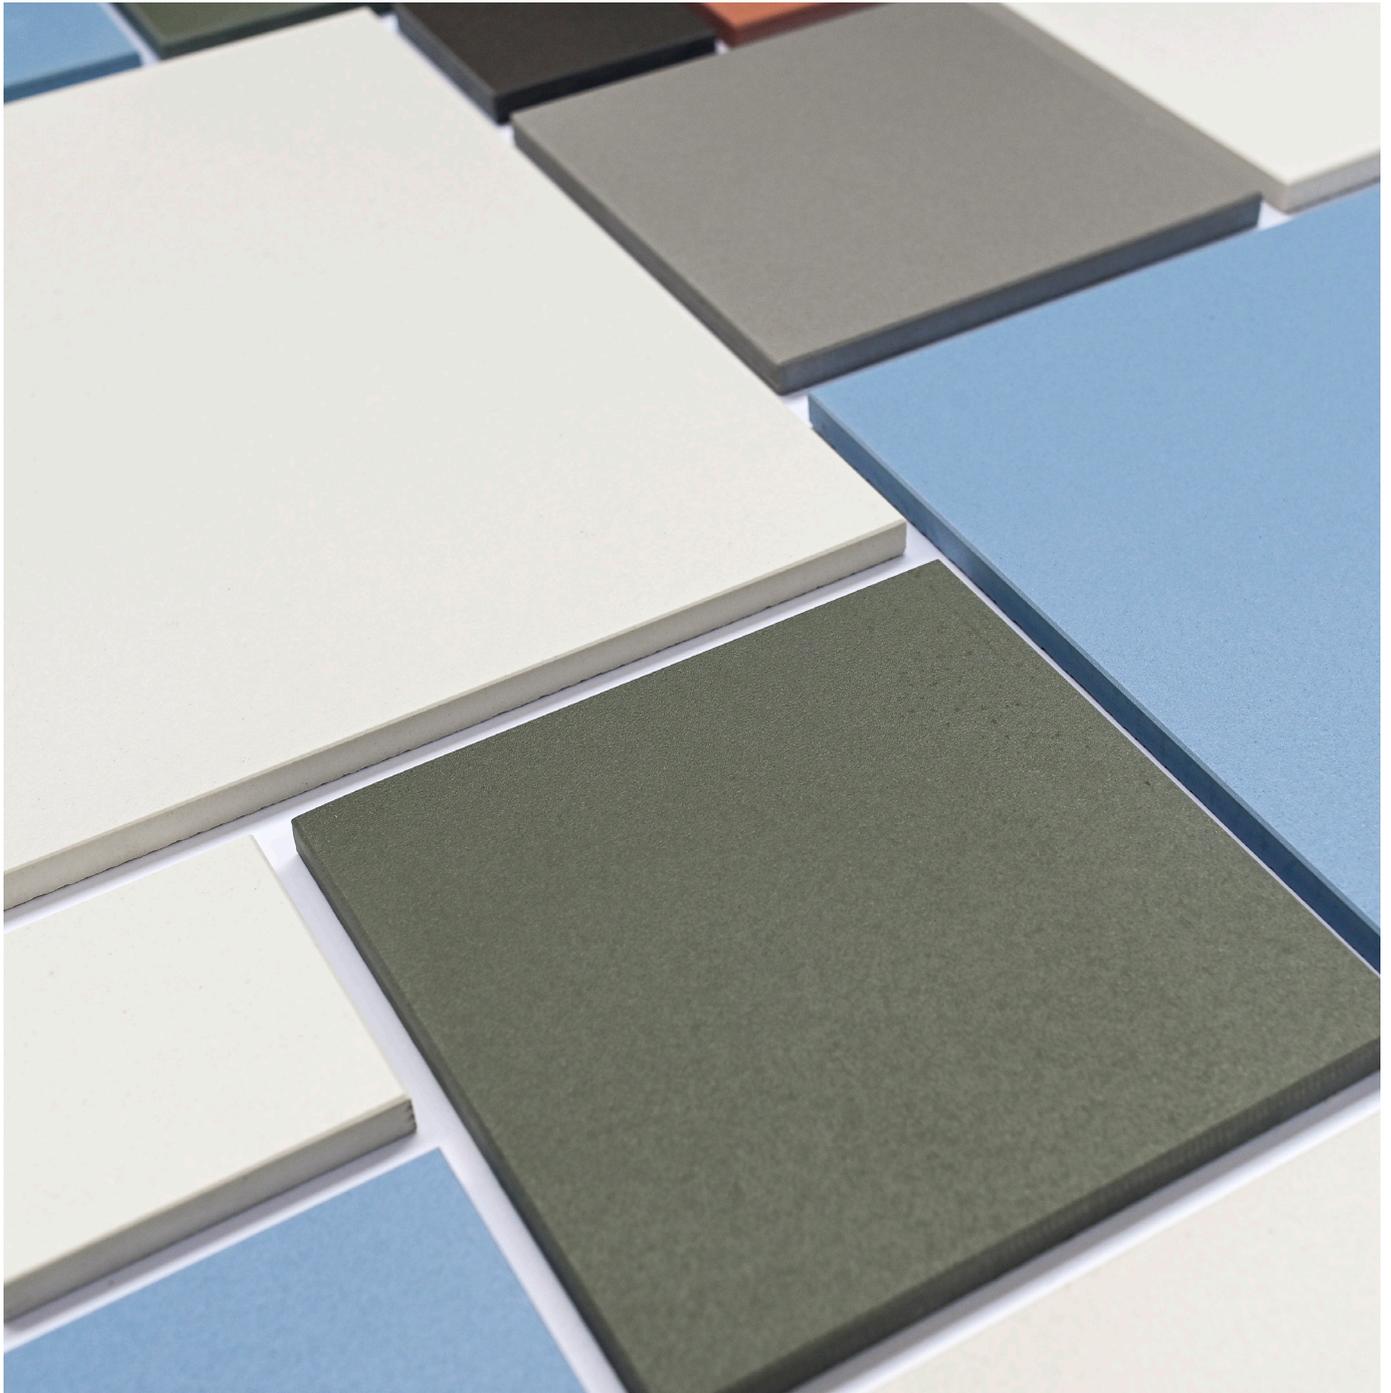



Roomset Photography



Cotto Natural 250x250mm and 250x125mm - MIL03N
Sky Natural 250x250mm and 250x125mm - MIL02N



Sky Natural 250x250mm - MIL02N
Basalt Natural 250x125mm - MIL06N
Chalk Natural 125x125mm - MIL01N



Moss Natural 125x62mm and 62x62mm - MIL05N
Chalk Natural 125x62mm - MIL01N
Cotto Natural 62x62mm - MIL03N



Chalk Natural 125x62mm - MIL01N
Basalt Natural 62x62mm - MIL06N



Cotto Natural 250x250mm - MIL03N
Basalt Natural 125x62mm - MIL06N



Chalk Natural 125x62mm and 62x62mm - MIL01N
Basalt Natural 62x62mm - MIL06N




Moss Natural 125x62mm - MIL05N
Chalk Natural 125x62mm - MIL01N
Basalt Natural 125x62mm - MIL06N




Colours & Product Codes

V2: Low to Moderate Shade Variation



CHALK LRV: 72

Product Code (All Sizes): **N** MIL01N



SKY LRV: 29

Product Code (All Sizes): **N** MIL02N



COTTO LRV: 25

Product Code (All Sizes): **N** MIL03N



ASH LRV: 29

Product Code (All Sizes): **N** MIL04N



MOSS LRV: 18

Product Code (All Sizes): **N** MIL05N




BASALT LRV: 15

Product Code (All Sizes): **N** MIL06N




Size Formats

Finishes & Availability

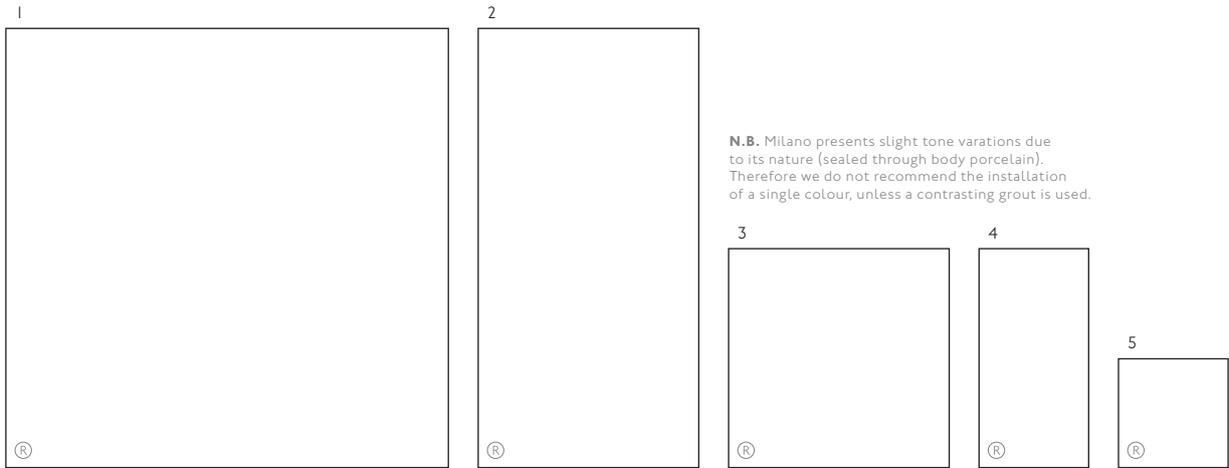

#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	250x250mm	Natural	All Colours Shown	8.5mm	20 Tiles	1.26 m ²	23.97 kg
2	250x125mm	Natural	All Colours Shown	8.5mm	40 Tiles	1.25 m ²	24.60 kg
3	125x125mm	Natural	All Colours Shown	8.5mm	39 Tiles	0.60 m ²	11.39 kg
4	125x62mm	Natural	All Colours Shown	8.5mm	56 Tiles	0.43 m ²	8.43 kg
5	62x62mm	Natural	All Colours Shown	8.5mm	112 Tiles	0.42 m ²	8.12 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. ALL LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. Rectified Edge

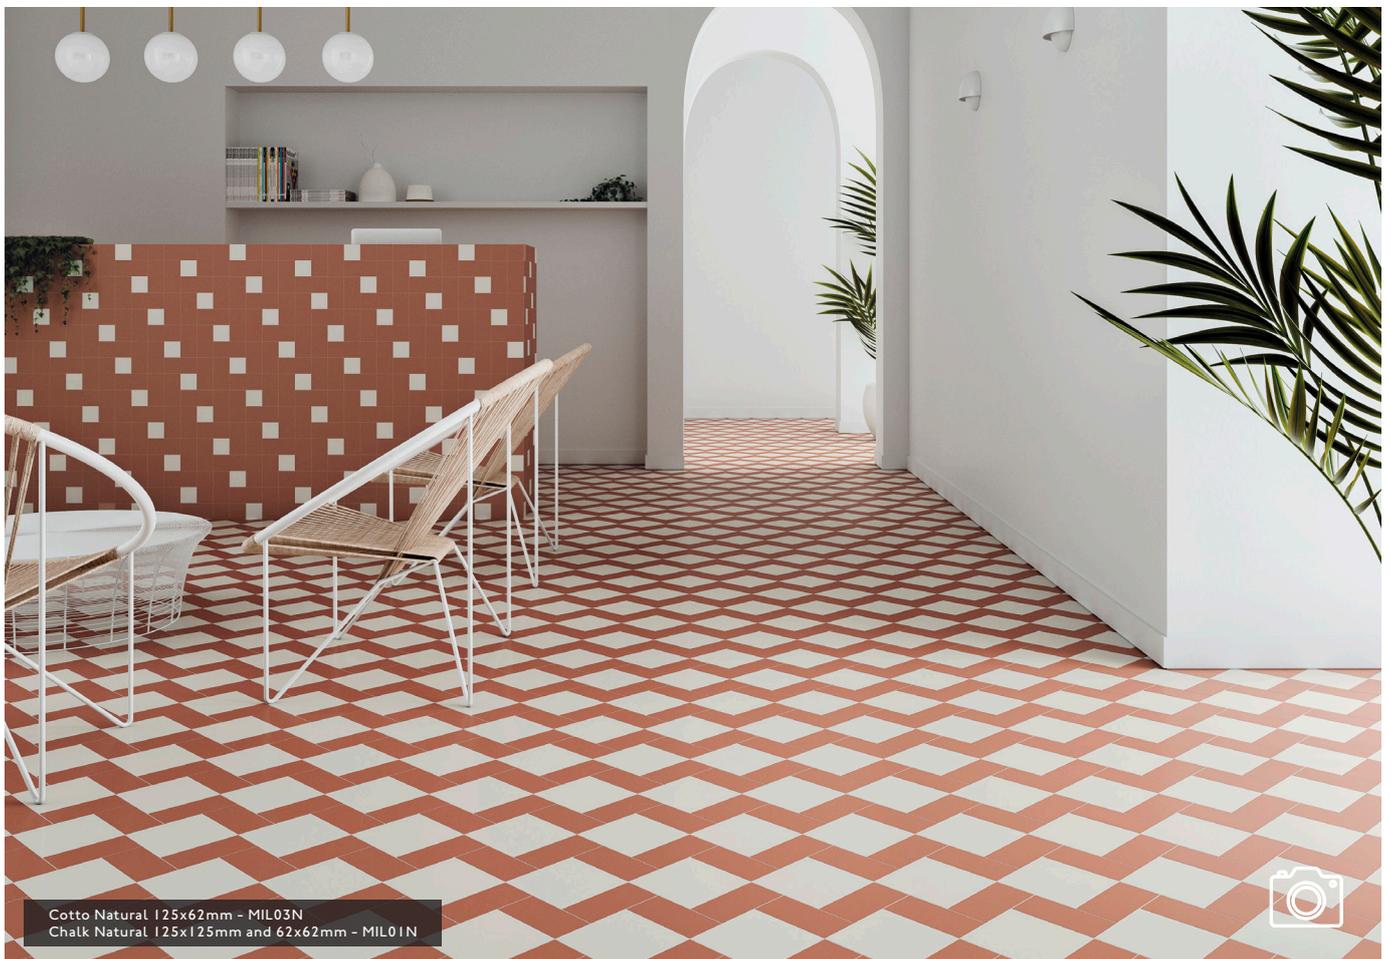

Technical Information

Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Milano	All Sizes Shown 	Internal & External	Internal Only	-	V2	Porcelain [Bla]

Note: CSV: Colour Shade Variation. **Key to Finishes:**  Natural

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
 Natural	All Colours Shown	Dry 36+ Wet 36+	-	R 10	-	-	Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
 Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm ²	Pass
 Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545 - 9	Pass	Pass
 Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
 Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
 Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
 Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	Pass	 Fire Rating	-	Class A I _{FL} Non Combustible
 Weight / M²	19.18 kg 8.5mm thick				

Note: All porcelain [Bla] products shown in this range overview conform to BS EN 14411.

Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Milano	Porcelain [Bla]	Yes	Up to 80%	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.





**Product
Notes**

A series of horizontal dashed lines for writing notes.

For more information about Milano or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: October 2021

JOHNSON • TILES 
MADE IN THE UK SINCE 1901