
## **DUPLET**

GLAZED CERAMIC | WALL TILES

COLOUR SHAPE ABSOLUTE





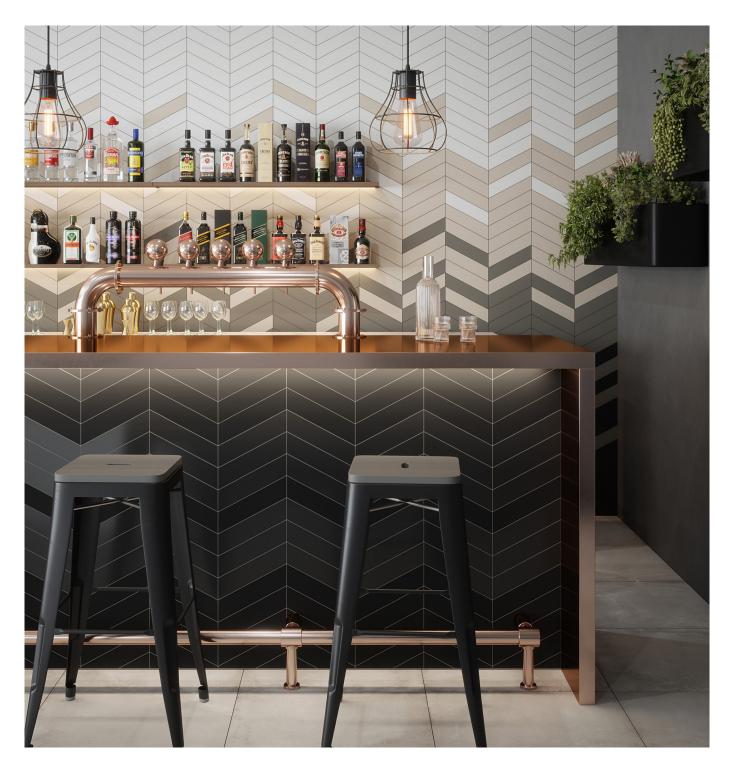










### **DUPLET**

Showcasing an architectural colour palette featuring six neutral tones ranging from Chalk to Graphite. Duplet is influenced by the Geometrics trend to create symmetry and balance within a space. The chevron format provides a stylish wall feature, with Satin and Gloss finishes available in every colour. Add a subtle hint of sophistication and playfulness through the exploration of layout patterning to provide a contemporary dynamic.

Front Cover Image: Chalk Satin 260x64mm Chevron Left - DUPIML & Chevron Right - DUPIMR, Oyster Satin 260x64mm Chevron Left - DUP3ML & Chevron Right - DUP3MR, Graphite Satin 260x64mm Chevron Left - DUP5ML & Chevron Right - DUP5MR, Graphite Satin 260x64mm Chevron Left - DUP6ML & Chevron Right - DUP6MR and Graphite Gloss 260x64mm Chevron Left - DUP6GL & Chevron Right - DUP6GR.

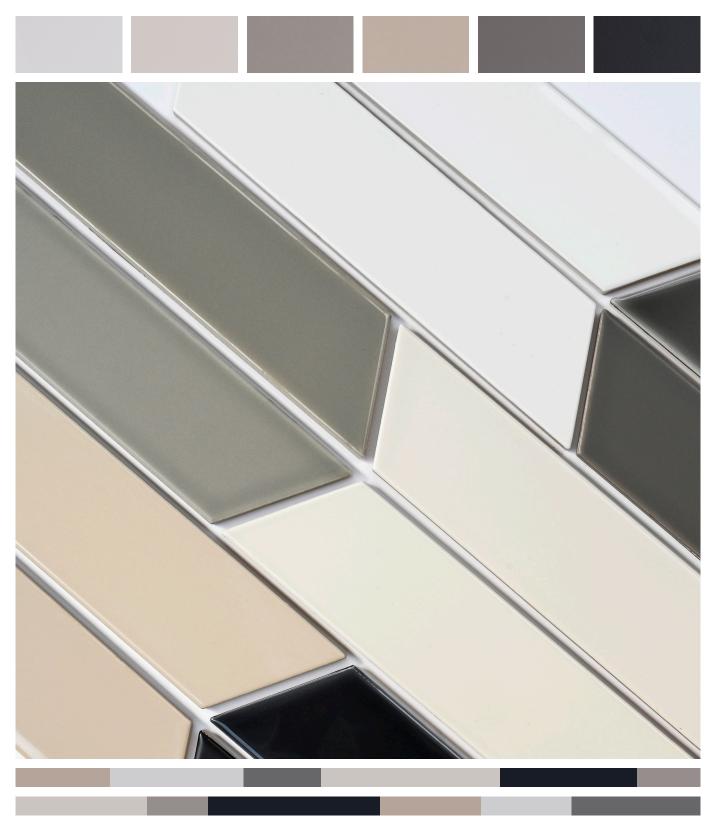

















#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
I	260x64mm	S Satin	All Colours Shown	8mm	30 Tiles	0.50 m²	7.00 kg
	Chevron Left	G Gloss	All Colours Shown	8mm	30 Tiles	0.50 m²	7.00 kg
2	260x64mm Chevron Right	S Satin	All Colours Shown	8mm	30 Tiles	0.50 m <sup>2</sup>	7.00 kg
		G Gloss	All Colours Shown	8mm	30 Tiles	0.50 m <sup>2</sup>	7.00 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

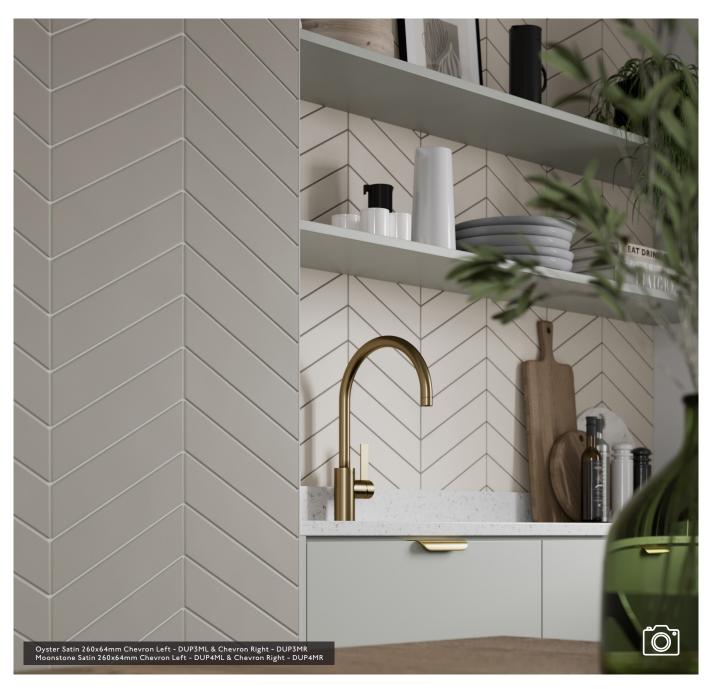

05 www.johnson-tiles.com



#### **Specification**

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Duplet	All Sizes Shown S G	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Note: CSV: Colour Shade Variation. Key to Finishes: S Satin G Gloss

#### **Physical Properties**

Test / Standard	Requirement	Test Result	Test / Standard Requirement Test Result
Length / Width EN ISO I 0545 - 2	± 0.5% ≤ ± 2mm	± 0.25%	Modulus of Rupture EN ISO 10545 - 4  Min. 15N / mm² ≥ 25N / mm²
Thickness EN ISO 10545 - 2	± 10% ≤ ± 0.5mm	± 2.5%	Thermal Shock EN ISO 10545 - 9 Pass Pass
Straightness of Side EN ISO 10545 - 2	± 0.3% ≤ ± 1.5mm	± 0.15%	Frost Resistance - Not Suitable
Rectangularity EN ISO   0545 - 2	± 0.5% ≤ ± 2mm	± 0.4%	Chemical Resistance EN ISO 10545 - 13  Min. Class B  Class A - B
Surface Flatness EN ISO   0545 - 2	± 0.5% ≤ ± 2mm	± 0.3%	Stain Resistance Min. Class 3 Class C
Water Absorption EN ISO   0545 - 3	10% to 20%	15% to 17%	Fire Rating - Class A I Non Combustible
kg Weight / M²	14.00 kg 8mm thick		

Note: All glazed ceramic [BIII] products shown in this range overview conform to BS EN 14411.

#### 

Rang		EPD	Recycled Content of the Tiles		Recyclable Content of the Packaging
Duple	et Glazed Ceramic [BI	II] Yes	Up to 20%	Up to 100%	Up to 100%

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

#### Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- $\bullet$  Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.










# For more information about Duplet or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ ◎ P in ▶

#### Where To Find Us

Johnson Tiles

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

#### Samples Enquiries

Tel: +44 (0) | 782 524 043 Fax: +44 (0) | 782 577 379 Email: samples@johnson-tiles.com

#### Technical Helpline

Tel: +44 (0)|782 524 || || Fax: +44 (0)|782 577 379

Email: techadvice@johnson-tiles.com

