# LIGNE

GLAZED CERAMIC | WALL TILES






















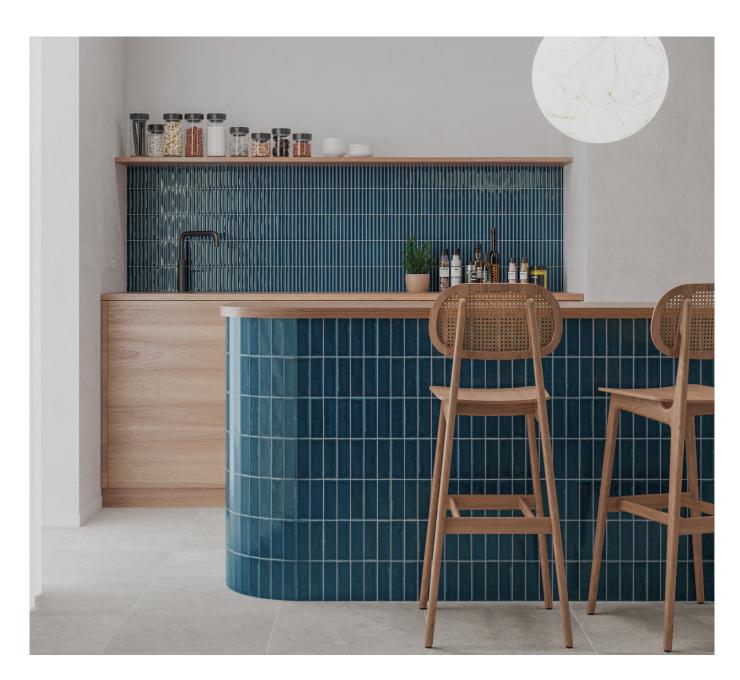

f X ⊙ ♂ P in □ www.johnson-tiles.com © 2024 Johnson Tiles Limited




# LIGNE

EIGHT COLOURS


TWO SIZES

ONE FINISH

Ligne is a characterful glazed ceramic wall tile range, ideal for both commercial and residential design projects. Available in two slim format sizes – 125x40mm and the highly popular 250x125mm strips – Ligne draws inspiration from the fusion of colour splashes and the rhythmic harmony of musical notes. Featuring a sophisticated gloss finish across eight eclectic colour options, ranging from soft pastels like Ash, Kiwi, and Violet to vibrant hues like Rosemist, Fennel, and Indigo, this collection is perfect for crafting a chromatic masterpiece that resonates with any design style.

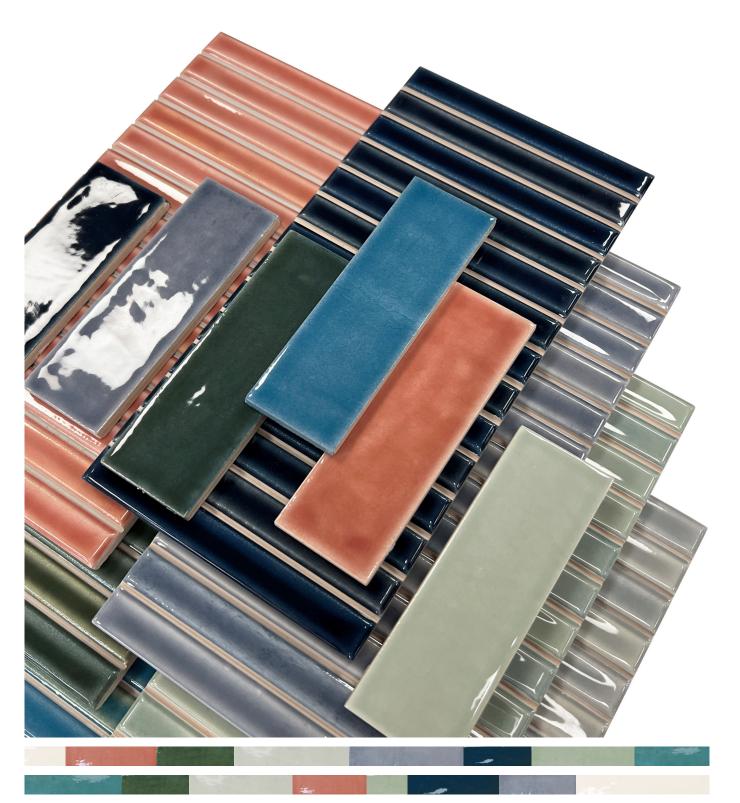




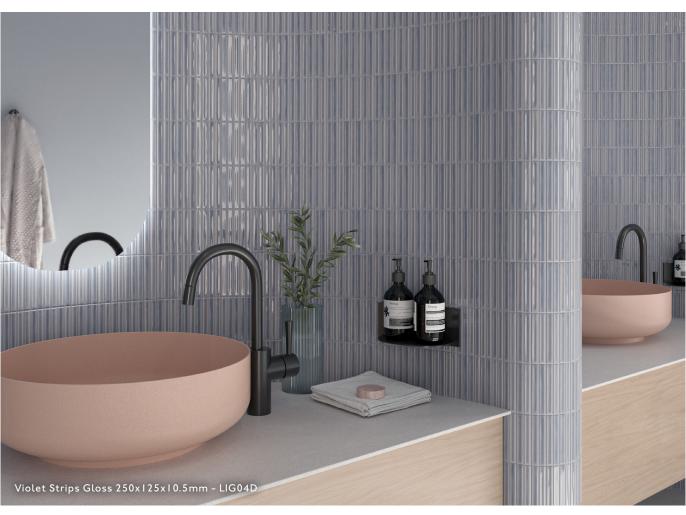





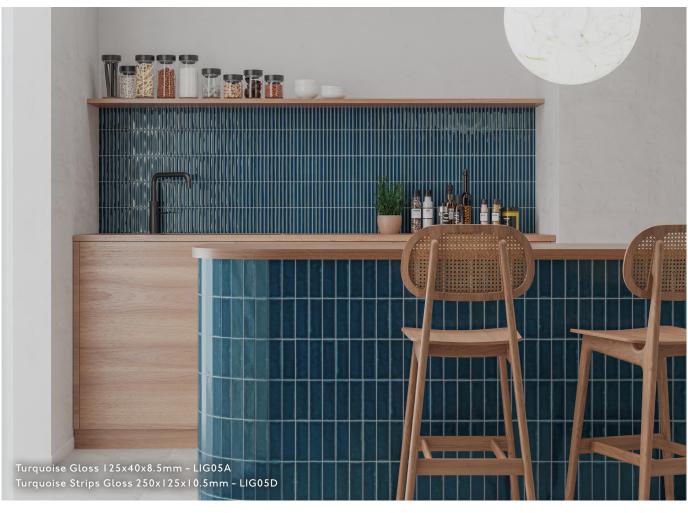

V3: Moderate to High Shade Variation



IVORY LRV: 65

Product Code: G LIG01A



IVORY - STRIPS LRV: 65
Product Code: G LIG01D



ASH LRV: 39

Product Code: G LIG02A



ASH - STRIPS LRV: 39

Product Code: G LIG02D

V3: Moderate to High Shade Variation



**KIWI** LRV: 53

Product Code: G LIG03A



KIWI - STRIPS LRV: 53

Product Code: G LIG03D



VIOLET LRV: 22
Product Code: G LIG04A



VIOLET - STRIPS LRV: 22

Product Code: G LIG04D

V3: Moderate to High Shade Variation



TURQUOISE LRV: 19

Product Code: G LIG05A



TURQUOISE - STRIPS LRV: 19

Product Code: G LIG05D



FENNEL LRV: II

Product Code: G LIG06A



FENNEL - STRIPS LRV: 11


Product Code: G LIG06D

V3: Moderate to High Shade Variation



ROSEMIST LRV: 22

Product Code: G LIG07A

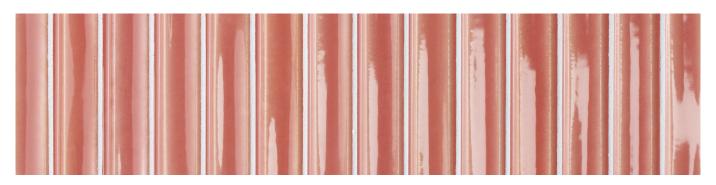

ROSEMIST - STRIPS LRV: 22

Product Code: G LIG07D



INDIGO LRV: 06

Product Code: G LIG08A




INDIGO - STRIPS LRV: 06

Product Code: G LIG08D

# SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

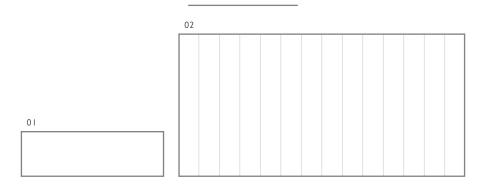

ı	#	Size Format	Thickness	Finish	Structure	Availability	Class	Pcs / Box	M² / Box	Kg / Box
	0 1	I 25x40mm	8.5mm	G Gloss	-	All Colours Shown	BIII	II4 Tiles	0.57 m <sup>2</sup>	7.80 kg
	02	250x125mm	10.5mm	G Gloss	Strips	All Colours Shown	BIII	14 Tiles	0.43 m <sup>2</sup>	7.25 kg

Note: Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.



# **TECHNICAL SUPPORT**

Specification, Sustainability and Important Information

#### **Product Specification**

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Linge	G Gloss	Internal Only	-	-	Glazed Ceramic / BIII

#### Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
Length / Width EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545-4	Min. 15N / mm²	Pass
Thickness EN ISO 10545-2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545-9	Pass	Pass
Straightness of Side EN ISO 10545-2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545-12	-	Not Suitable
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
Surface Flatness EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
Water Absorption EN ISO 10545-3	10% to 20%	Pass	Fire Rating		Class A I Non Combustible

# **Sustainability Credentials**

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Ligne	Glazed Ceramic / BIII	Yes	Up to 60%	Up to 100% (Boxes Only)

Note: Please contact our technical helpline, or visit our website for specification and installation advice. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

#### Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0) 1782 524 111 or email: technical@johnson-tiles.com.

www.johnson-tiles.com

# WHERE TO FIND US

#### **Head Office**

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ, United Kingdom

Tel: +44 (0) 1782 575 575 Email: info@johnson-tiles.com www.johnson-tiles.com

#### Material Lab Studio

10 Great Titchfield Street, London, WIW 8BB, United Kingdom

Tel: +44 (0)20 7436 8629 Email: info@material-lab.co.uk www.material-lab.co.uk

### **Factory Outlet**

Tel: +44 (0) 1782 524 040 Email: foutlet@johnson-tiles.com www.outlet.johnson-tiles.com

#### **Customer Services**

Tel: +44 (0) 1782 524 000 Email: sales@johnson-tiles.com 8:30am - 4:30pm (Monday - Friday)

#### Order A Sample

Tel: +44 (0) 1782 524 043 Email: samples@johnson-tiles.com

#### Technical Advice Helpline

Tel: +44 (0) 1782 524 111 Email: technical@johnson-tiles.com

