BUCKINGHAM WALL

GLAZED CERAMIC | WALL TILES

MARBLE STRUCTURE ABSOLUTE



RECTIFIED

EDGE





UP TO **30%** RECYCLED CONTENT

BUCKINGHAM WALL

Buckingham Wall provides a modern take on classic marbles with stunning veined detail. This nature-inspired collection features intriguing tactile finishes to add depth and visual interest. Try the Line Structure option for a soft, subtle profile, Wave for a corrugated, industrial feel, or Wiggle for undulating movement. The monochromatic tones of White, Light Grey, and Anthracite are available in large format sizes of 900x300mm.

Front Cover Image: Light Grey Line Structure Natural 900x300mm - BUCK2L.









Colours & Product Codes

V2: Low to Moderate Shade Variation

WHITE LRV: 60

WHITE LRV: 60 LINE STRUCTURE Product Code: N BUCK5L



LIGHT GREY LRV.55 LINE STRUCTURE Product Code: N BUCK2L

WHITE LRV: 60

WHITE LRV: 60 WAVE STRUCTURE Product Code: N BUCK5V



LIGHT GREY (RV:55) WAVE STRUCTURE Product Code: N BUCK2V

WHITE (RV.60) WIGGLE STRUCTURE Product Code: N BUCK5W

and the second	
and the second	
and a state of the second state	
	And the second

LIGHT GREY LRV:55 WIGGLE STRUCTURE Product Code: N BUCK2W






ANTHRACITE LRV: 55 LINE STRUCTURE Product Code: N BUCK4L

ANTHRACITE LRV-55 WAVE STRUCTURE Product Code: N BUCK4V




ANTHRACITE (RV:55) WIGGLE STRUCTURE Product Code: N BUCK4W

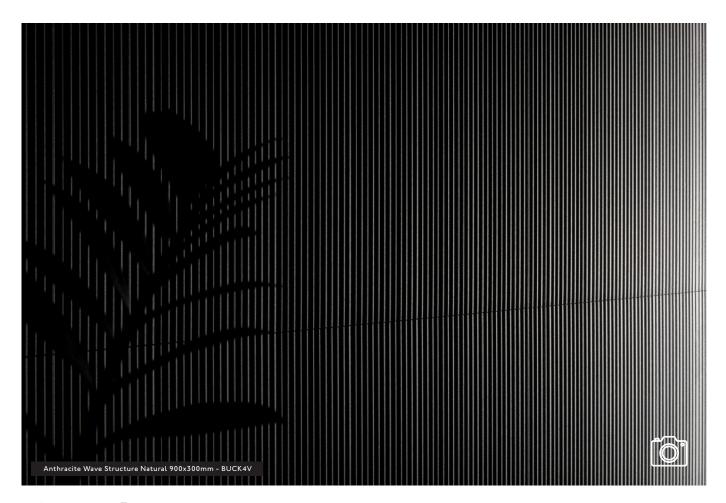




Size Formats Finishes & Availability



#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
I	900x300mm Line Structure	N Only	All Colours Shown	llmm	4 Tiles	1.07 m²	19.49 kg
2	900x300mm Wave Structure	N Only	All Colours Shown	llmm	4 Tiles	1.07 m ²	19.49 kg
3	900x300mm Wiggle Structure	N Only	All Colours Shown	llmm	4 Tiles	1.07 m²	19.49 kg

Key to Finishes: Ň Natural

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. (R) Rectified Edge

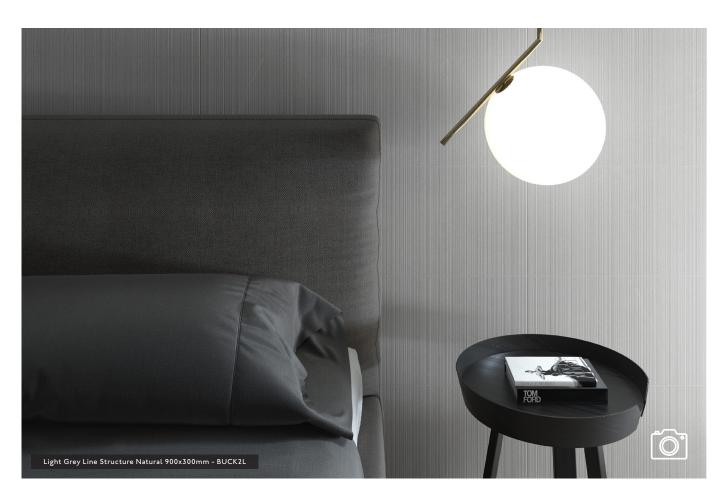



Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Buckingham Wall	All Sizes Shown ℕ	Internal Only	-	-	V2	Glazed Ceramic [BIII]

Physical Properties - Ceramic [BIII] Ductile

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm²	≥ 15N / mm²
→ Thickness ► EN ISO 10545 - 2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
→ Surface Flatness ► NISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	10% to 20%	10% to 20%	Fire Rating	-	Class A1 Non Combustible
kg Weight / M ²	18.05 kg I I mm thick				

Note: All Ceramic [BIII] products listed in this overview conform to BS EN 14411.

✓ Sustainability Information

		EPD	Recycled Content of the Tiles		Recyclable Content of the Packaging
Buckingham Wall	Glazed Ceramic [BIII]	Yes	Up to 30%	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: EPD: Environmental Product Declaration for the products shown in this overview can be found on the Buckingham Wall pages on our website.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

• All sizes shown are metric modular.

- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



Product Notes For more information about Buckingham Wall or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ @ ? in ₽

Where To Find Us

Johnson Tiles Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043 Fax: +44 (0)1782 577 379 Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111 Fax: +44 (0)1782 577 379 Email: techadvice@johnson-tiles.com

Launched: July 2021

