

# DARLINGTON

GLAZED CERAMIC AND PORCELAIN | WALL AND FLOOR TILES

MARBLE PATTERN SELECT



[www.johnson-tiles.com](http://www.johnson-tiles.com)

© 2024-25 Johnson Tiles Limited

Est. 1901  
**JOHNSON  
TILES**



# DARLINGTON



**FOUR COLOURS**



**THREE SIZES**



**THREE FINISHES**

Taking inspiration from marble and introducing a contemporary twist. Darlington captures classic vein details across an on-trend colour palette of three neutral colour-ways - Pearl, Stone and Pewter. Add character and interest to any interior wall application with two size formats - 450x250mm available in a satin finish and a gloss finish 592x295mm option. Why not try introducing the geometric patchwork décor design for an eclectic aesthetic with modern vibes. Co-ordinating porcelain floor options are available in all colours to round off the design look and complete the installation.









## COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

---



### PEARL PEI: III LRV: 73

Product Code (Bill): G DARL1A + S DARL1A | Product Code (Bla): R DARL1F



### STONE PEI: II LRV: 54

Product Code (Bill): G DARL2A + S DARL2A | Product Code (Bla): R DARL2F



### PEWTER PEI: II LRV: 38

Product Code (Bill): S DARL3A | Product Code (Bla): R DARL3F



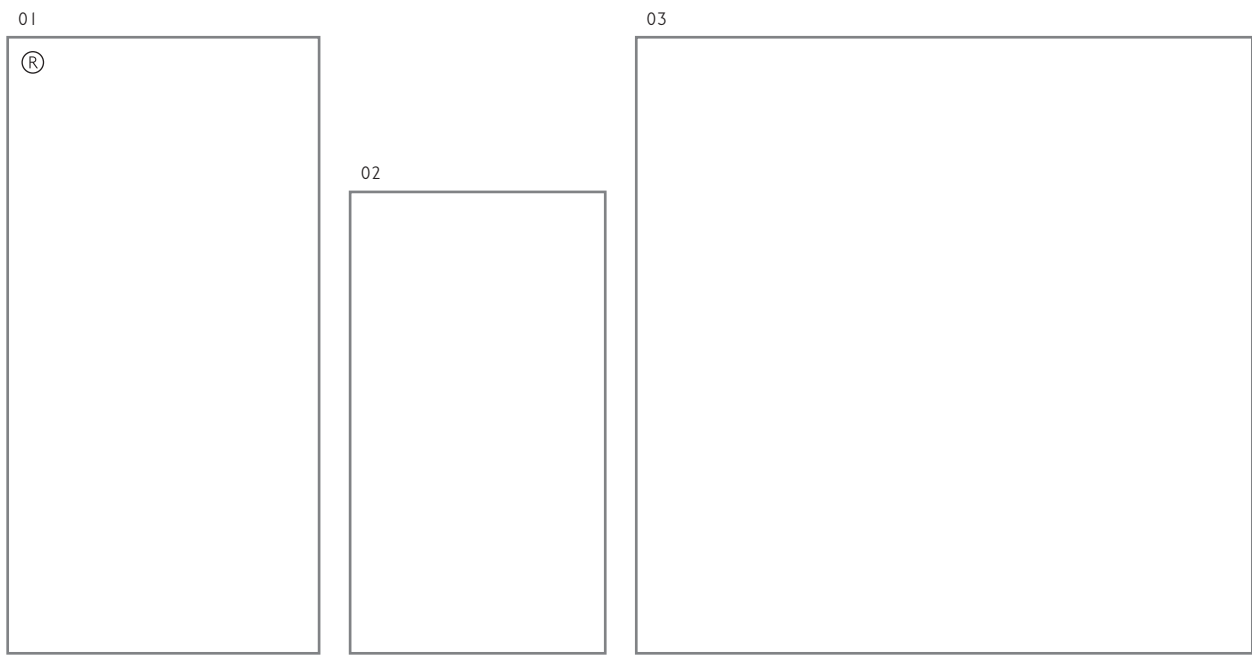
### PATCHWORK DÉCOR




Product Code (Bill): G DARL3A



# SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information



#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M² / Box	Kg / Box
01	600x300mm	9.5mm	 Gloss	Pearl, Stone and Patchwork Only	BIII	6 Tiles	1.05 m²	15.90 kg
02	450x250mm	7.5mm	 Satin	All Colours Shown	BIII	13 Tiles	1.46 m²	18.40 kg
03	605x605mm	9.5mm	 Grip	All Colours Shown	Bla	4 Tiles	1.44 m²	31.00 kg




**Note:** Glazed Ceramic / BIII tiles and Glazed Porcelain / Bla tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com). (R) Rectified.




# TECHNICAL SUPPORT

Specification, Sustainability and Important Information













## Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Darlington	 Gloss	Internal Only	-	-	Glazed Ceramic / BIII
	 Satin	Internal Only	-	-	Glazed Ceramic / BIII
	 Grip	Internal and External	Internal and External	Yes	Glazed Porcelain / Bla













## Floor Values

Finish	Colour	PTV (96)	PTV (55)	R Value	Wet Ramp	PEI	Traffic
 Grip	Pearl Only	Wet 36+	Wet 36+	-	-	III	Light Commercial
	All Other Colours	Wet 36+	Wet 36+	-	-	II	Domestic

## Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 15N / mm <sup>2</sup>	Pass
 Thickness EN ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	-	Not Suitable
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	10% to 20%	Pass	 Fire Rating		Class A I Non Combustible

## Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 35N / mm <sup>2</sup>	Pass
 Thickness EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	Resistant	Resistant
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	$\leq 0.5\%$	Pass	 Fire Rating		Class A I FL Non Combustible

## Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Darlington	Glazed Ceramic / BIII	Yes	Up to 20%	Up to 100%
	Glazed Porcelain / Bla	Yes	-	Up to 100% (Boxes Only)

**Note:** Please contact our technical helpline, or visit our website for specification and installation advice.  
EPD: Environmental Product Declaration. CSV: Colour Shade Variation.



# TECHNICAL SUPPORT

## Specification, Sustainability and Important Information

### Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com)

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: [technical@johnson-tiles.com](mailto:technical@johnson-tiles.com).



Wall: Stone Gloss 600x300x9.5mm - DARL2A  
Wall: Patchwork Décor Gloss 600x300x9.5mm - DARLID  
Floor: Stone Grip 605x605x9.5mm - DARL2F

## WHERE TO FIND US

### Head Office

Harewood Street, Tunstall,  
Stoke on Trent, Staffordshire,  
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)  
[www.johnson-tiles.com](http://www.johnson-tiles.com)

---

### Material Lab Studio

10 Great Titchfield Street,  
London, W1W 8BB,  
United Kingdom

Tel: +44 (0)20 7436 8629  
Email: [info@material-lab.co.uk](mailto:info@material-lab.co.uk)  
[www.material-lab.co.uk](http://www.material-lab.co.uk)

---

### Factory Outlet

Tel: +44 (0)1782 524 040  
Email: [foutlet@johnson-tiles.com](mailto:foutlet@johnson-tiles.com)  
[www.outlet.johnson-tiles.com](http://www.outlet.johnson-tiles.com)

---

### Customer Services

Tel: +44 (0)1782 524 000  
Email: [sales@johnson-tiles.com](mailto:sales@johnson-tiles.com)  
8:30am - 4:30pm (Monday - Friday)

---

### Order A Sample

Tel: +44 (0)1782 524 043  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

### Technical Advice Helpline

Tel: +44 (0)1782 524 111  
Email: [technical@johnson-tiles.com](mailto:technical@johnson-tiles.com)

---

Updated: June 2025