

TERRAZZO

GLAZED PORCELAIN | FLOOR & WALL TILES

STONE EFFECT TILES



JOHNSON • TILES 
MADE IN THE UK SINCE 1901

TERRAZZO

An urban inspired range of rectified glazed porcelain floor and wall tiles. Available in a dual colour palette of Light Stone and Dark Stone, Terrazzo contains chips of colour to emulate the look of marble. With the fragments ranging from bright white to deep steel across the two colourways, Terrazzo explores variation.

Suitable for use internally and externally, Terrazzo offers size options ranging from 600x600mm to 1600x800mm with two finishes available, making it extremely versatile in its applications.

Front Cover Image: Light Stone Natural 800x400mm - TRZ01N



Dark Stone Natural 800x800mm - TRZ02N





Roomset Photography



Light Stone Textured 600x600mm - TRZ01T
Dark Stone Textured 600x600mm - TRZ02T



Dark Stone Natural 600x600mm - TRZ02N



Light Stone Textured 600x300mm - TRZ01T



Light Stone Natural 1200x600mm - TRZ01N
Light Stone Natural 600x300mm - TRZ01N




Colours & Product Codes

V2: Low to Moderate Shade Variation



LIGHT STONE

N TRZ01N + **T** TRZ01T **PEI: IV** **LRV: 38**

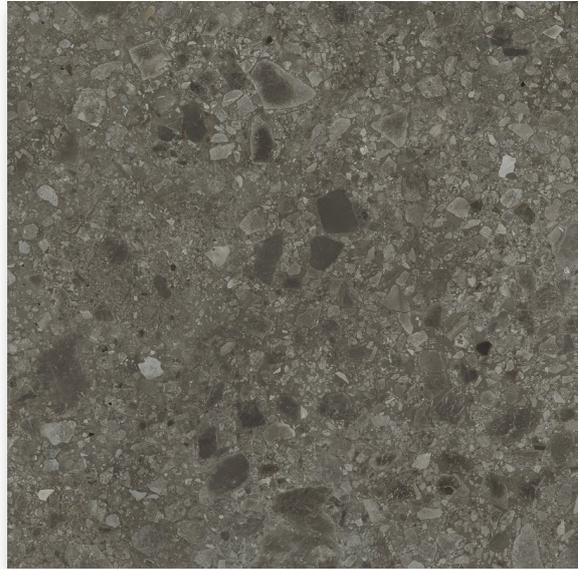


DARK STONE

N TRZ02N + **T** TRZ02T **PEI: II** **LRV: 16**



Sizes, Finishes & Availability

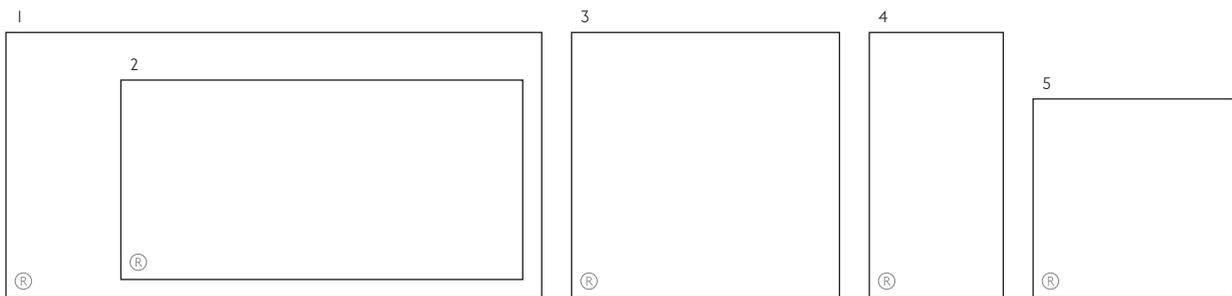

#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	1600x800mm	N Natural	All Colours Shown	9.8mm	1 Tile	1.28 m ²	29.50 kg
2	1200x600mm	N Natural	All Colours Shown	9.2mm	2 Tiles	1.44 m ²	32.50 kg
3	800x800mm	N Natural	All Colours Shown	9.8mm	2 Tiles	1.28 m ²	29.50 kg
4	800x400mm	N Natural	All Colours Shown	9.8mm	4 Tiles	1.28 m ²	29.50 kg
5	600x600mm	N Natural	All Colours Shown	9.2mm	3 Tiles	1.08 m ²	23.00 kg
		T Textured	All Colours Shown	9.2mm	3 Tiles	1.08 m ²	23.00 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. **R** Rectified Edge



Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Terrazzo	All Sizes Shown	Internal & External	Internal Only	-	V2	Glazed Porcelain [Bla]
Terrazzo	600x600x9.2mm	Internal & External	Internal Only	-	V2	Glazed Porcelain [Bla]

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
Natural	Light Stone	Dry 36+ Wet 25 - 35	-	R 10	-	IV	Commercial
Natural	Dark Stone	Dry 36+ Wet 25 - 35	-	R 10	-	II	Light Commercial
Textured	Light Stone	Dry 36+ Wet 25 - 35	-	R 10	-	IV	Commercial
Textured	Dark Stone	Dry 36+ Wet 25 - 35	-	R 10	-	II	Light Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV: Pendulum Test Value.

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	$\pm 0.1\%$	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm ²	$\geq 37\text{N} / \text{mm}^2$
Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	$\pm 2.1\%$	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	$\pm 0.1\%$	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.1\%$	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.2\%$	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.1\%$	Fire Rating	-	Class A I _n Non Combustible
Weight / M ²	23.05 kg 9.8mm thick	21.30 kg 9.2mm thick			

Note: All products are classed as Bla - Glazed Porcelain. All products conform to BS EN 14411.

Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD	SKA Rating
Terrazzo	Glazed Porcelain [Bla]	Up to 40%	Up to 100% (Boxes)	Up to 100% (Boxes)	Yes	-

Note: EPD: Environmental Product Declaration for the products shown in this overview can be on the Terrazzo pages on our website.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Terrazzo or
any of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: August 2018 Updated: May 2022

JOHNSON • TILES 
MADE IN THE UK SINCE 1901