# CLASSICS

GLAZED CERAMIC | WALL TILES




















f X ⊙ ♂ P in □ www.johnson-tiles.com © 2024-25 Johnson Tiles Limited



# **CLASSICS**

🗞 SIX COLOURS 🛛 TWO SIZES 🔓 TWO FINISHES

Influenced by the beauty of natural marbles and stones, Classics provides six colour options ranging from timeless White Carrara to warm Crema Marfil. Available in 300x200mm, and certain colours also offering a 600x300mm option, Classics is ideal for residential interiors.

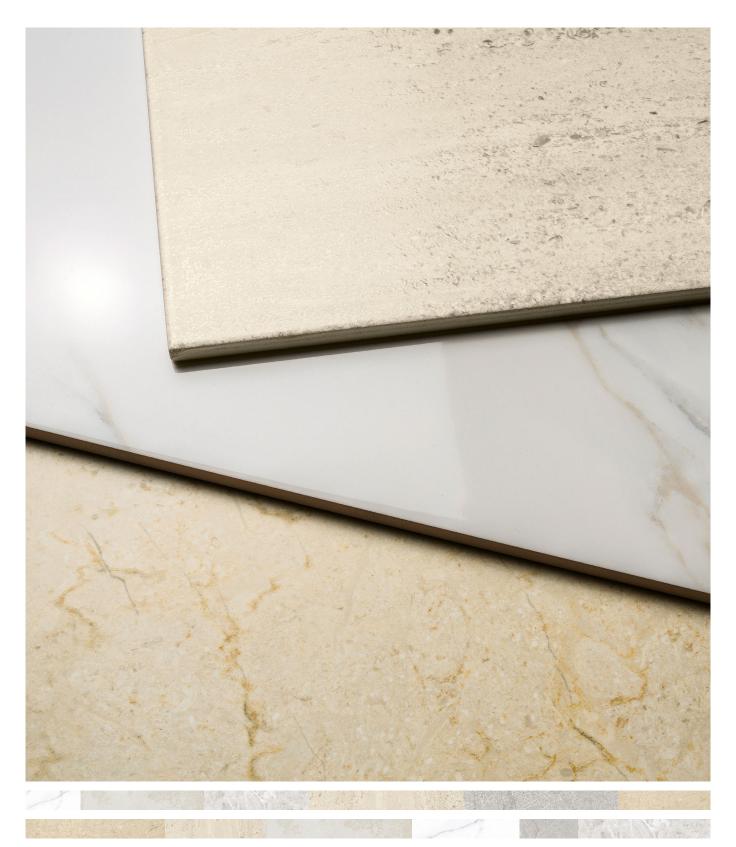







# **COLOURS AND PRODUCT CODES**

V2: Low to Moderate Shade Variation



CARRARA LRV: 83 Product Code: G CICSIA



TRAVERTINE LRV: 63 Product Code: S CICS2A



CREMA MARFIL LRV: 54 Product Code: S CICS3A

# **COLOURS AND PRODUCT CODES**

V2: Low to Moderate Shade Variation



BRUSHED STONE LRV: 55

Product Code: S CICS4A



MARBLESTONE LRV: 62

Product Code: G CICS5A




SLATE LRV: 40

Product Code: S CICS6A

# SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

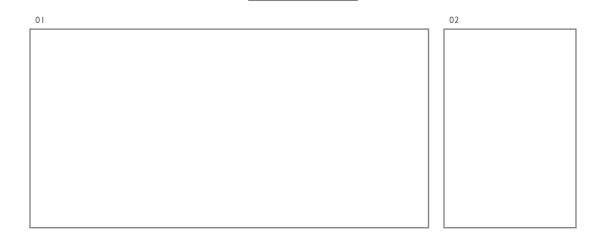

#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M² / Box	Kg / Box
0 1	600x300mm	I 0 mm	S Satin	Travertine and Crema Marfil Only	BIII	5 Tiles	0.90 m <sup>2</sup>	I 6.00 kg
02	300x200mm	8mm	G Gloss	Carrara and Marblestone Only	BIII	17 Tiles	1.02 m <sup>2</sup>	I 4.00 kg
			S Satin	Travertine, Brushed Stone and Slate Only	BIII	17 Tiles	1.02 m²	14.00 kg

Note: Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.



## **TECHNICAL SUPPORT**

Specification, Sustainability and Important Information

#### **Product Specification**

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Classics	G Gloss	Internal Only	-	=	Glazed Ceramic / BIII
Classics	S Satin	Internal Only	-	-	Glazed Ceramic / BIII

#### Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
Length / Width EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545-4	Min. I5N / mm²	Pass
Thickness EN ISO 10545-2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545-9	Pass	Pass
Straightness of Side EN ISO 10545-2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545-12	-	Not Suitable
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
Surface Flatness EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
Water Absorption EN ISO 10545-3	10% to 20%	Pass	Fire Rating		Class A I Non Combustible

#### **Sustainability Credentials**

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Classics	Glazed Ceramic / BIII	Yes	Up to 20%	Up to 100%

Note: Please contact our technical helpline, or visit our website for specification and installation advice. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

#### Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

www.johnson-tiles.com

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0) 1782 524 111 or email: technical@johnson-tiles.com.

## WHERE TO FIND US

#### **Head Office**

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ, United Kingdom

Tel: +44 (0) 1782 575 575 Email: info@johnson-tiles.com www.johnson-tiles.com

#### Material Lab Studio

10 Great Titchfield Street, London, WIW 8BB, United Kingdom

Tel: +44 (0)20 7436 8629 Email: info@material-lab.co.uk www.material-lab.co.uk

#### **Factory Outlet**

Tel: +44 (0) 1782 524 040 Email: foutlet@johnson-tiles.com www.outlet.johnson-tiles.com

#### **Customer Services**

Tel: +44 (0) 1782 524 000 Email: sales@johnson-tiles.com 8:30am - 4:30pm (Monday - Friday)

#### Order A Sample

Tel: +44 (0) 1782 524 043 Email: samples@johnson-tiles.com

#### Technical Advice Helpline

Tel: +44 (0) 1782 524 111 Email: technical@johnson-tiles.com JOHNSON TILES

www.johnson-tiles.com | f × ② & P in ■