

# OSLO

GLAZED PORCELAIN | FLOOR & WALL TILES

WOOD

ABSOLUTE



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

# OSLO

Showcasing a bleached, aged look, this wood effect range features four colours – Raw, Weathered White, Aged Grey, and Carbon Grey. Natural and Grip finishes are available in this range, with the Grip achieving a PTV 36+ slip resistance rating. One large-format plank option of 1200x200mm is featured, perfect for opening out spaces and adding a nature-inspired aesthetic to any design.

*Front Cover Image: Raw Natural 1200x200mm - OSLO1N.*





## Roomset Photography



Aged Grey Natural | 200x200mm - OSLO3N



Weathered White Grip | 200x200mm - OSLO2G



Raw Natural | 200x200mm - OSLO1N



## Colours & Product Codes

V3: Moderate to High Shade Variation



### RAW

**N** OSL01N + **G** OSL01G

PEI: IV LRV: 53



### WEATHERED WHITE

**N** OSL02N + **G** OSL02G

PEI: IV LRV: 72



### AGED GREY

**N** OSL03N + **G** OSL03G

PEI: IV LRV: 42



### CARBON GREY

**N** OSL04N + **G** OSL04G

PEI: IV LRV: 15



## Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	1200x200mm	<b>N</b> Natural	All Colours Shown	10.5mm	6 Tiles	1.44 m <sup>2</sup>	35.00 kg
		<b>G</b> Grip	All Colours Shown	10.5mm	6 Tiles	1.44 m <sup>2</sup>	35.00 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. **®** Rectified Edge



### Additional Fittings

V3: Moderate to High Shade Variation



**RAW**

(N) OLS1NS (PEI: IV) (LRV: 53)



**WEATHERED WHITE**

(N) OLS2NS (PEI: IV) (LRV: 72)




**AGED GREY**

(N) OLS3NS (PEI: IV) (LRV: 42)



**CARBON GREY**

(N) OLS4NS (PEI: IV) (LRV: 15)

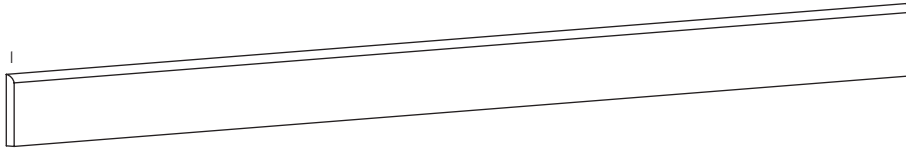

#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	1200x95mm Round Top Skirting	(N) Natural	All Colours Shown	10.5mm	10 Tiles	12.00 lm	26.00 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



Weathered White Grip 1200x200mm - OSL02G



## Technical Data

### Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Oslo	All Sizes Shown	Internal & External	Internal Only	-	V3	Glazed Porcelain [Bla]
	All Sizes Shown	Internal & External	Internal & External	Yes	V3	Glazed Porcelain [Bla]

### Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
Natural	All Colours Shown	Dry 36+ Wet 36+	-	R 10	A	IV	Commercial
Grip	All Colours Shown	Dry 36+ Wet 36+	Wet 36+	R 11	B	IV	Commercial

**Note:** Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. CSV: Colour Shade Variation. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

### Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm <sup>2</sup>	$\geq 35\text{N} / \text{mm}^2$
Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Min. Class B
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Min. Class 3
Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.5\%$	Fire Rating	-	Class A I <sub>FL</sub> Non Combustible
Weight / M <sup>2</sup>	24.31 kg 10.5mm thick				

**Note:** All products are classed as Bla - Glazed Porcelain. All products conform to BS EN 14411.

### Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Oslo	Glazed Porcelain [Bla]	-	Up to 30%	Some Part Recycled	Up to 100%

### Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Oslo or any  
of our other product ranges simply visit  
**[www.johnson-tiles.com](http://www.johnson-tiles.com)** |      

#### **Where To Find Us**

##### **Johnson Tiles**

Harewood Street,  
Tunstall,  
Stoke on Trent,  
Staffordshire,  
ST6 5JZ

Tel: +44 (0)1782 575 575  
Fax: +44 (0)1782 577 377  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)

---

##### **Samples Enquiries**

Tel: +44 (0)1782 524 043  
Fax: +44 (0)1782 577 379  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

##### **Technical Helpline**

Tel: +44 (0)1782 524 111  
Fax: +44 (0)1782 577 379  
Email: [techadvice@johnson-tiles.com](mailto:techadvice@johnson-tiles.com)

*Launched: July 2021 - Updated: October 2023*

**JOHNSON • TILES**   
MADE IN THE UK SINCE 1901