

LUXX

GLAZED PORCELAIN | FLOOR AND WALL TILES

MARBLE

PATTERN

MOSAIC

ABSOLUTE



www.johnson-tiles.com

© 2024 Johnson Tiles Limited

Est. 1901
**JOHNSON
TILES**

LUXX



EIGHTEEN COLOURS




FOUR SIZES



TWO FINISHES

Luxx is an exciting range of marble effect products, with a variety of different prints available to suit any and every design scheme. With options ranging from Pinto Marble, Greige Onyx, Grey Breche and Carbon Quartz to the five featured animal prints of Turtle, Snake, Oryx, Jaguar and Python. Luxx is a stunning range, ideal for adding character and variation, featuring three co-ordinating large-format sizes ranging from 1200x1200mm to 600x600mm available in natural and polished finishes and mosaic options. Luxx invites you to experiment with lay-patterns for striking visual impact in any residential or commercial development.

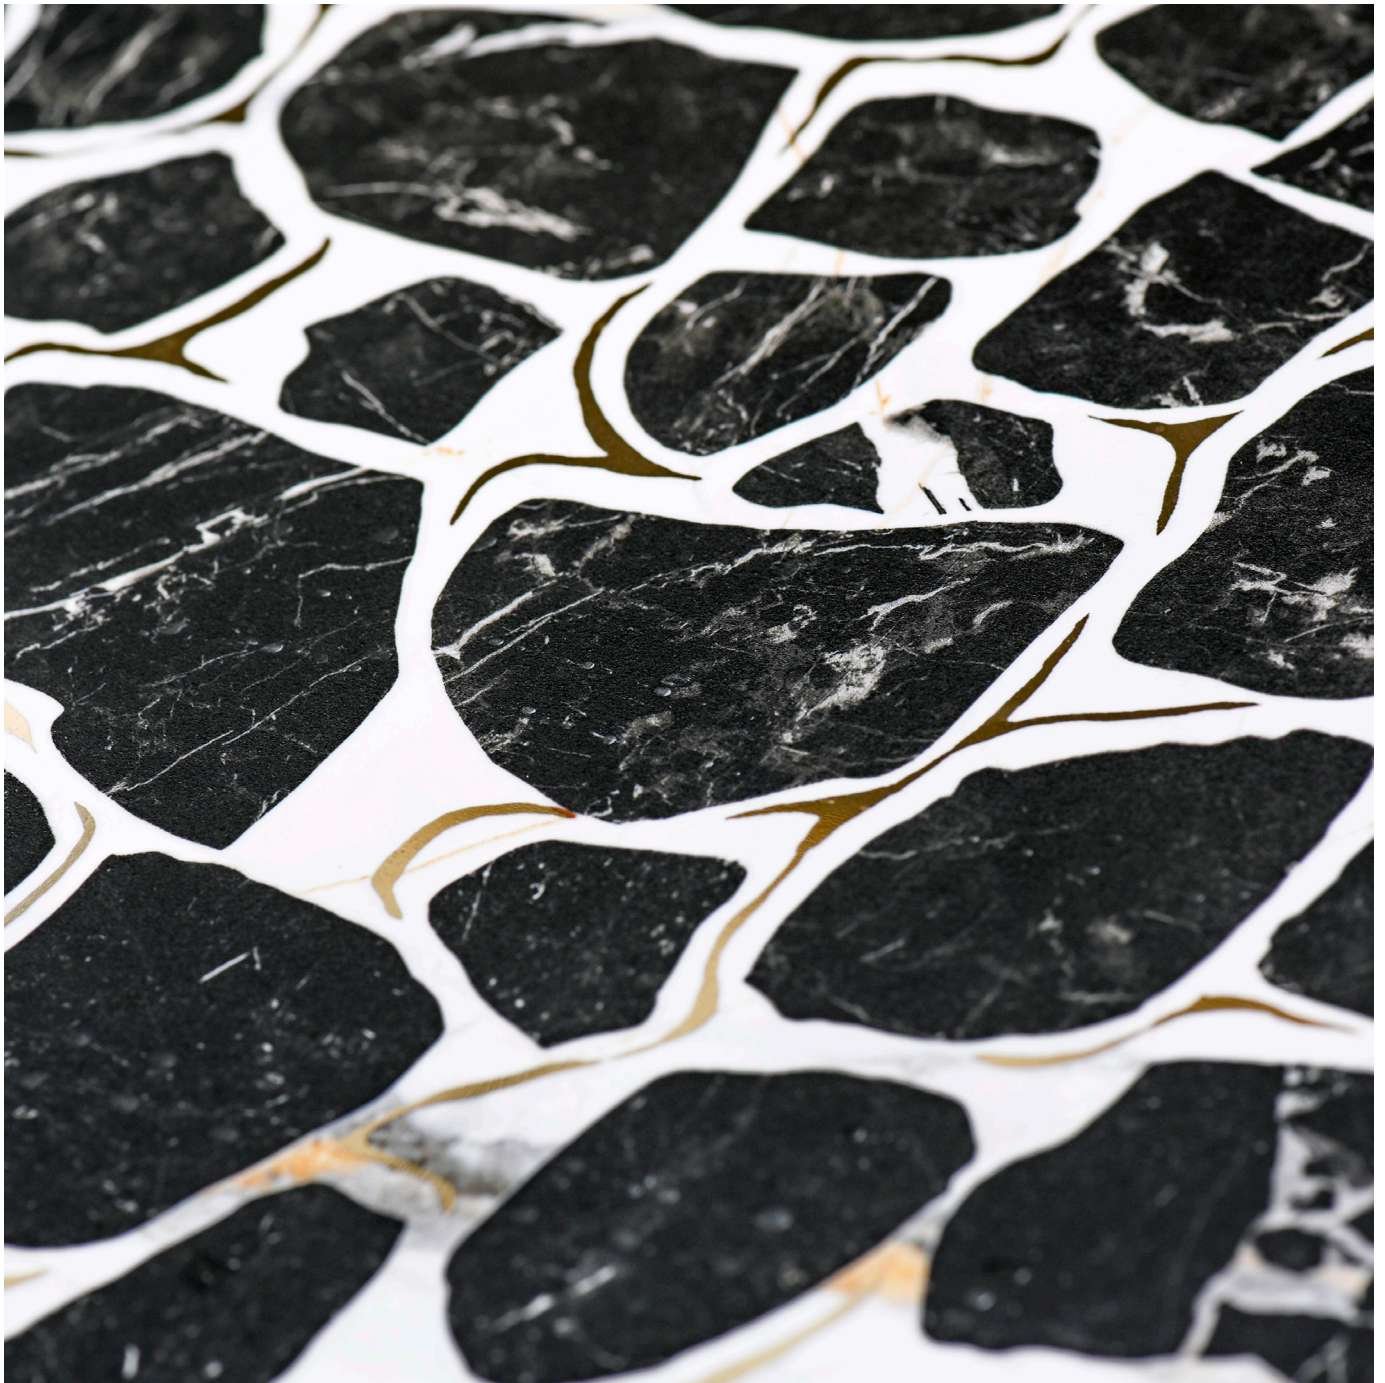



COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation



WHITE ONYX

Product Code: **[N]** LUX09N + **[P]** LUX09P | Mosaic Code: **[N]** LUX9NM | Fitting Code: **[N]** LUX9NS + **[P]** LUX9PS



IVORY CALACATTA

Product Code: **[N]** LUX01N + **[P]** LUX01P | Mosaic Code: **[N]** LUX1NM | Fitting Code: **[N]** LUX1NS + **[P]** LUX1PS



BIANCO CARRARA

Product Code: **[N]** LUX03N + **[P]** LUX03P | Mosaic Code: **[N]** LUX3NM | Fitting Code: **[N]** LUX3NS + **[P]** LUX3PS

COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation



PINTO MARBLE

Product Code: [N] LUX02N + [P] LUX02P | Mosaic Code: [N] LUX2NM | Fitting Code: [N] LUX2NS + [P] LUX2PS



LIGHT QUARTZITE

Product Code: [N] LUX10N + [P] LUX10P | Mosaic Code: [N] LU10NM | Fitting Code: [N] LU10NS + [P] LU10PS




CREMA MARBLE

Product Code: [N] LUX04N + [P] LUX04P | Mosaic Code: [N] LUX4NM | Fitting Code: [N] LUX4NS + [P] LUX4PS


COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

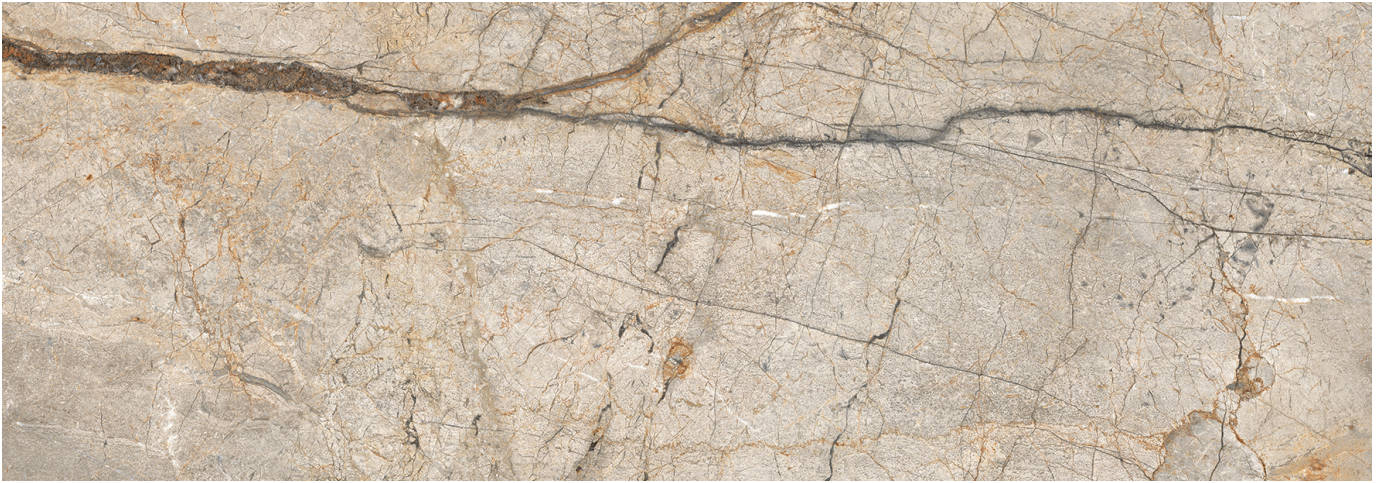

GREIGE GRANITE

Product Code: ☐ LUX05N + ☐ LUX05P | Mosaic Code: ☐ LUX5NM | Fitting Code: ☐ LUX5NS + ☐ LUX5PS

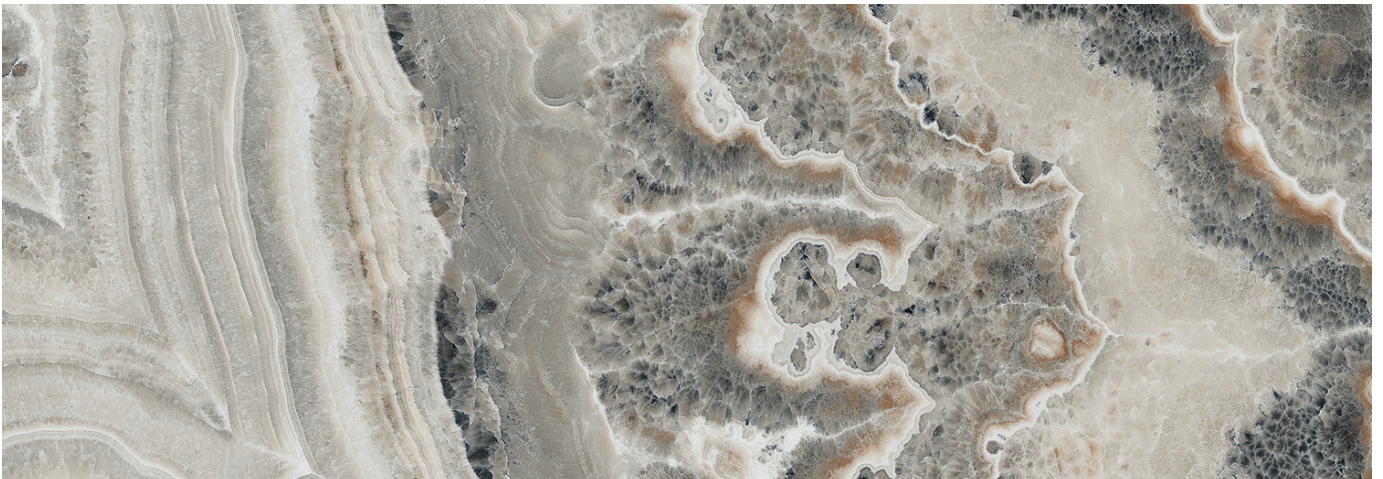

GREIGE ONYX

Product Code: ☐ LUX06N + ☐ LUX06P | Mosaic Code: ☐ LUX6NM | Fitting Code: ☐ LUX6NS + ☐ LUX6PS




SILVER MARBLE

Product Code: ☐ LUX11N + ☐ LUX11P | Mosaic Code: ☐ LUX11NM | Fitting Code: ☐ LUX11NS + ☐ LUX11PS


COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

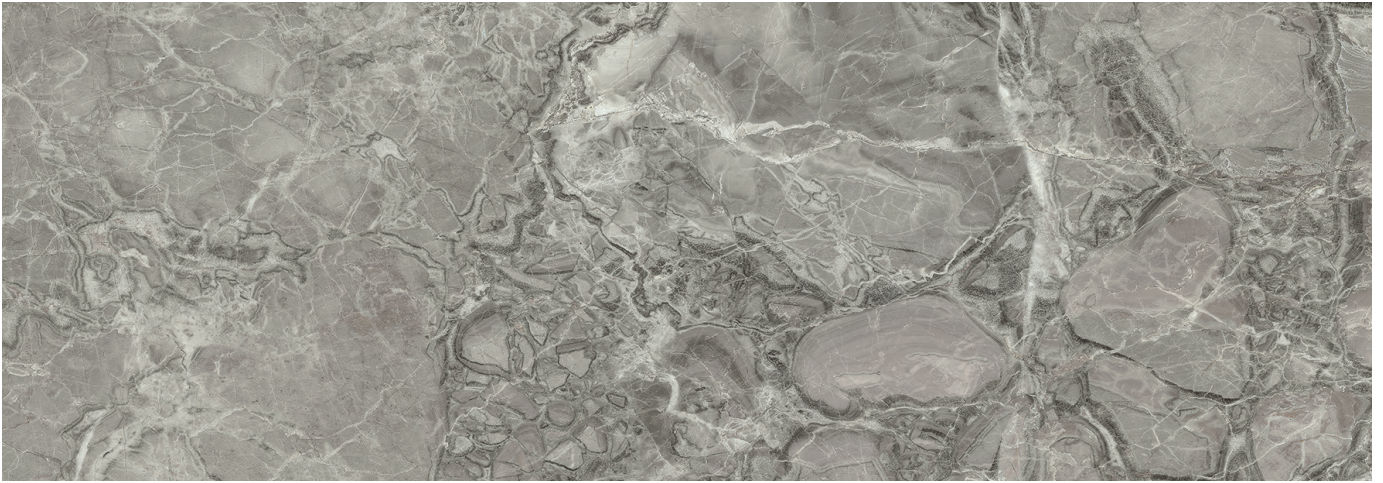


GREY BRECHE

Product Code: ☐ LUX12N + ☐ LUX12P | Mosaic Code: ☐ LU12NM | Fitting Code: ☐ LU12NS + ☐ LU12PS

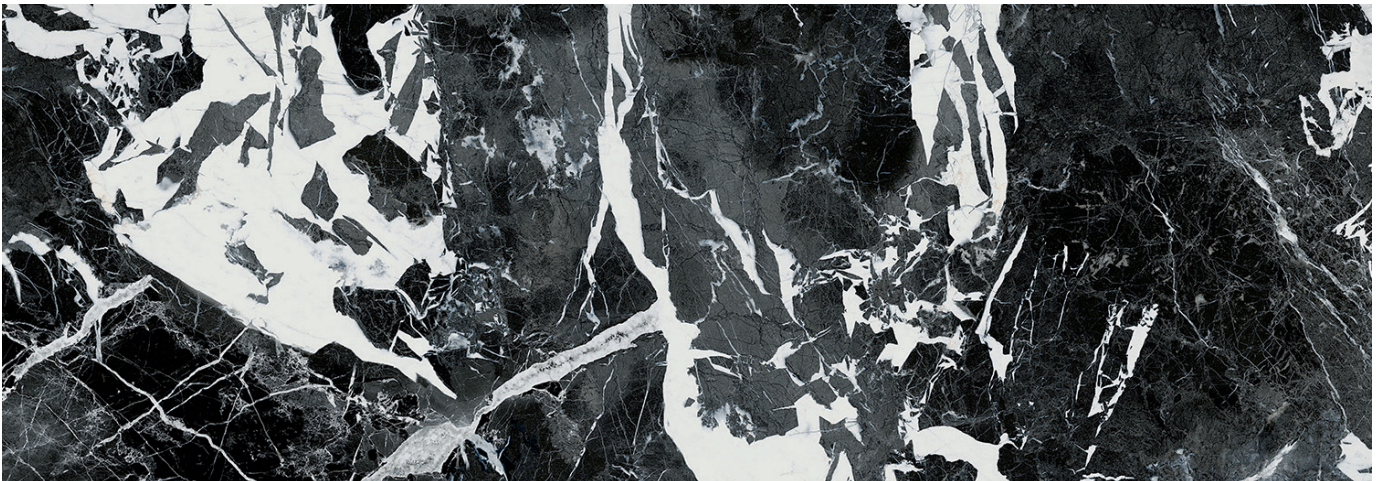

NERO MARBLE

Product Code: ☐ LUX07N + ☐ LUX07P | Mosaic Code: ☐ LUX7NM | Fitting Code: ☐ LUX7NS + ☐ LUX7PS

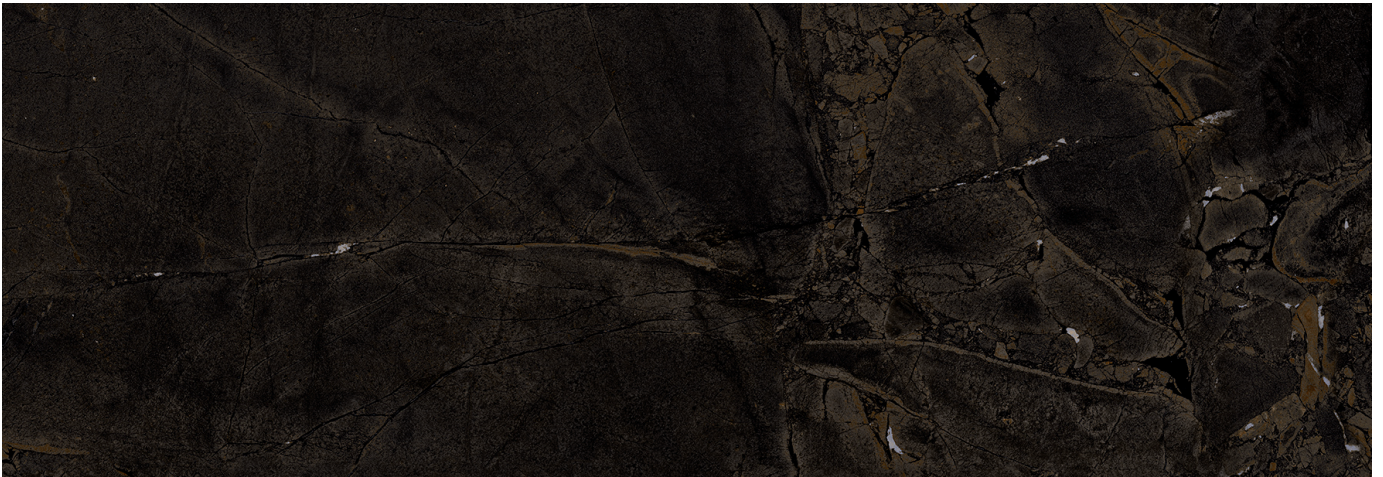


CARBON QUARTZ

Product Code: ☐ LUX08N + ☐ LUX08P | Mosaic Code: ☐ LUX8NM | Fitting Code: ☐ LUX8NS + ☐ LUX8PS


COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

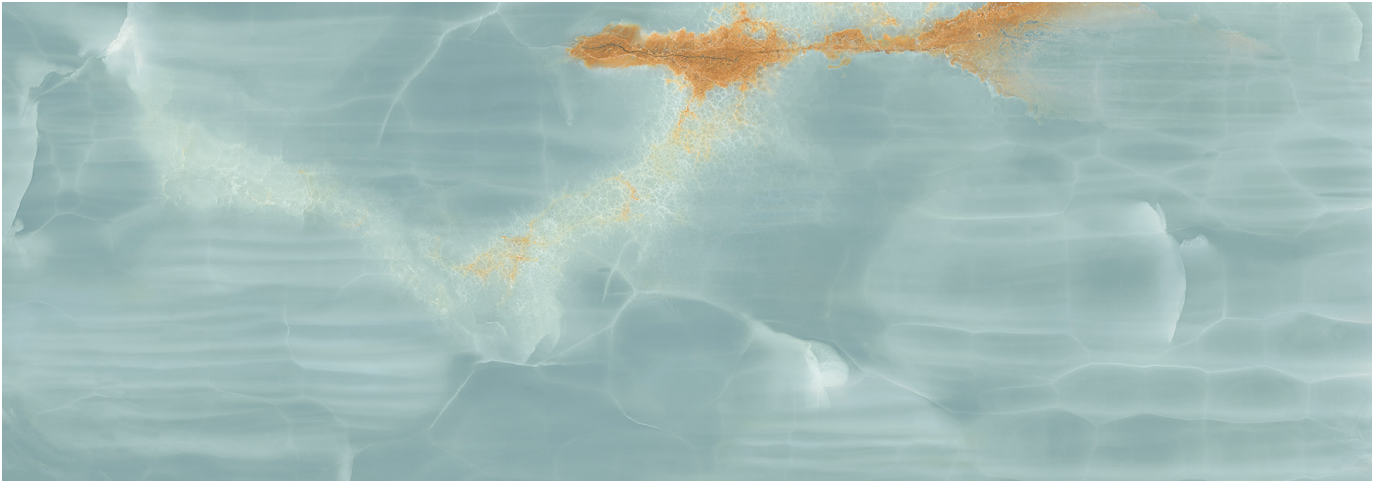


AQUA ONYX

Product Code: [N] LUX13N + [P] LUX13P | Mosaic Code: [N] LU13NM | Fitting Code: [N] LU13NS + [P] LU13PS

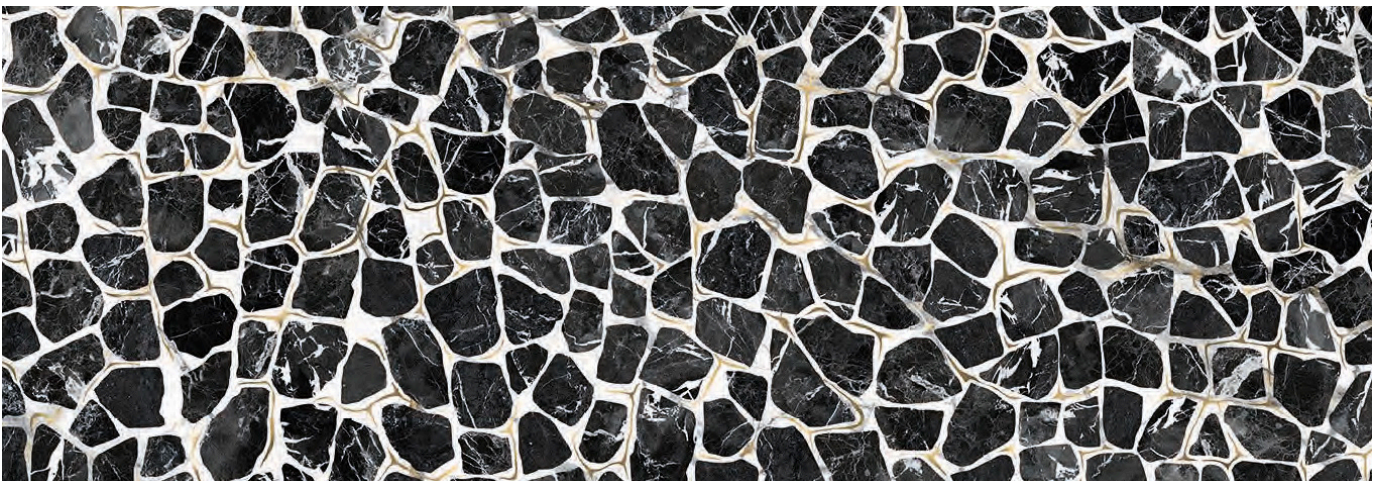

TURTLE DÉCOR

Product Code: [P] LUX03D

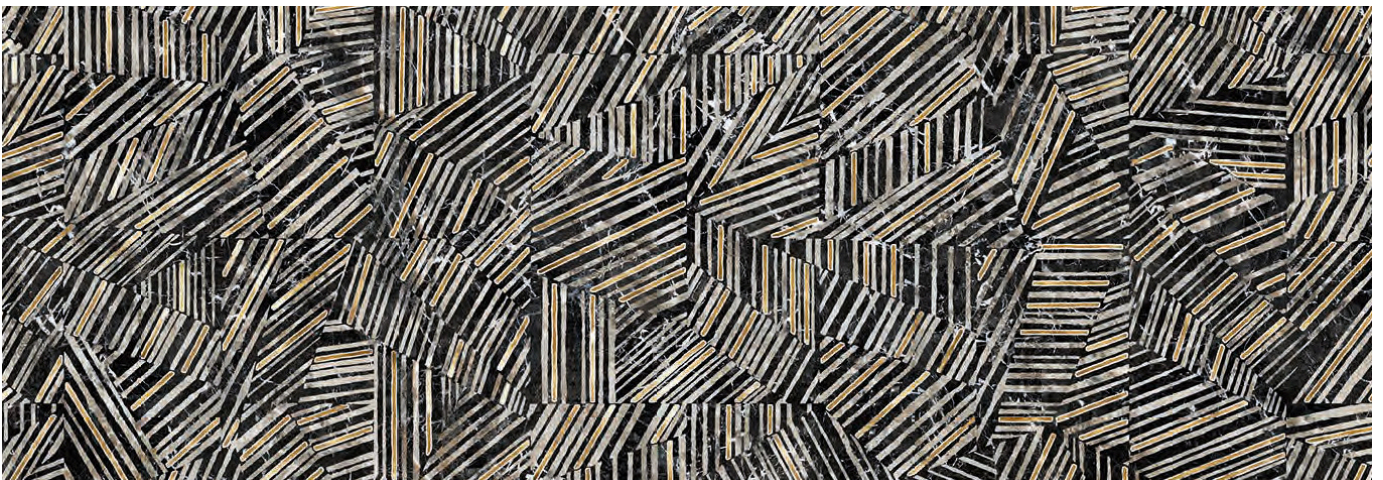

SNAKE DÉCOR

Product Code: [P] LUX04D


COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation




ORYX DÉCOR

Product Code: [P] LUX05D

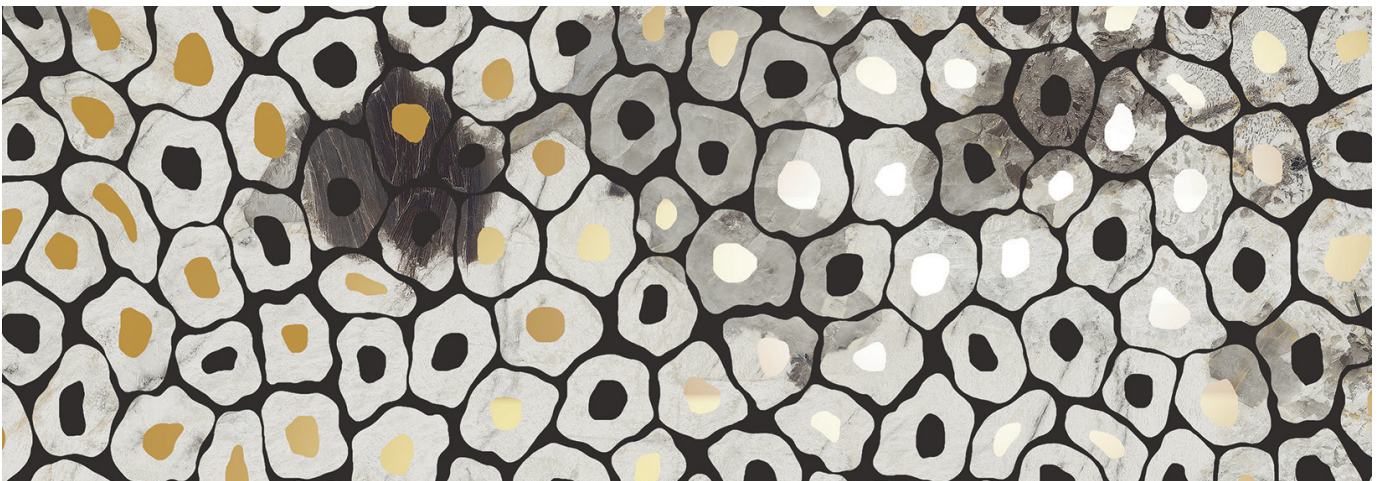

JAGUAR DÉCOR

Product Code: [P] LUX06D

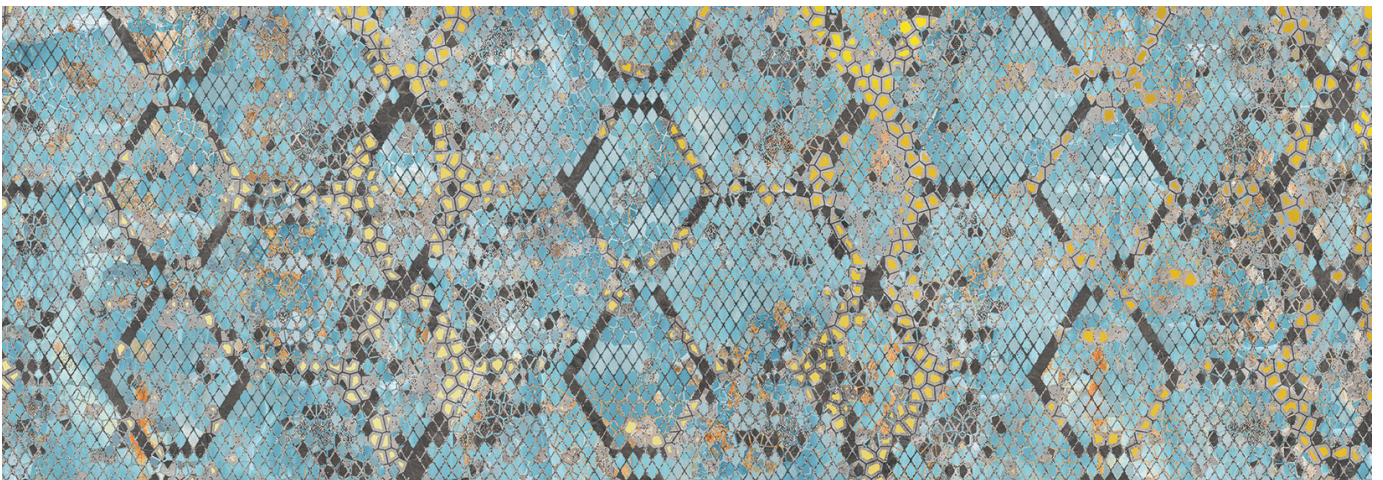


PYTHON DÉCOR

Product Code: [P] LUX07D

SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

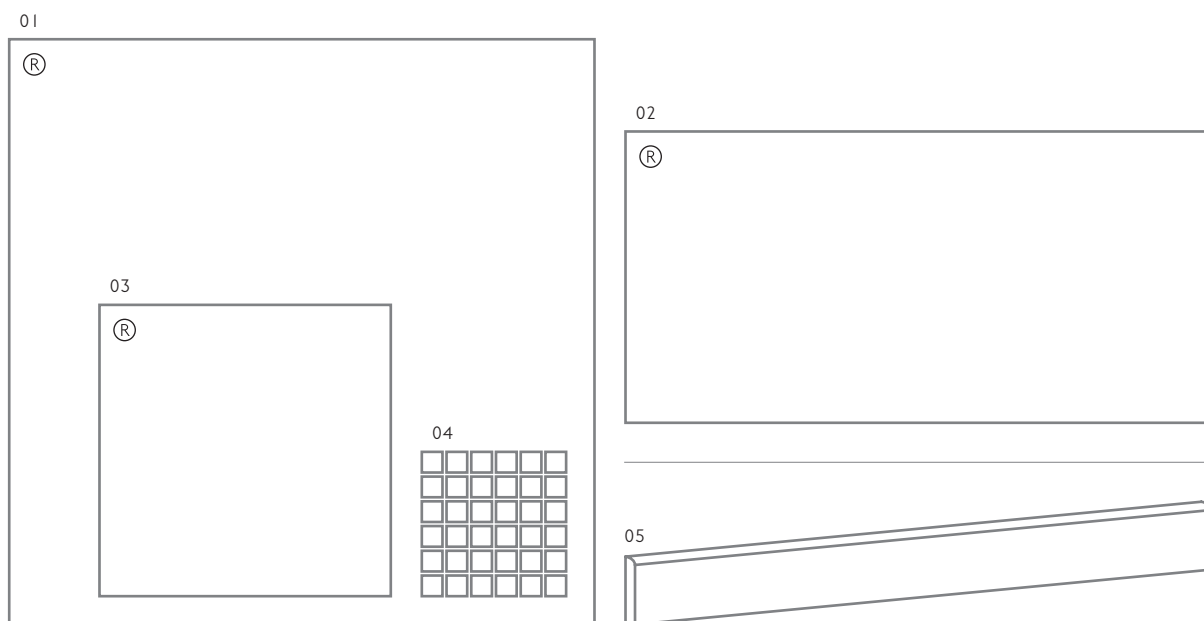

#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M ² / Box	Kg / Box
01	1200x1200mm	6.5mm	Natural	All Colours Shown (Except Décors)	Bla	2 Tiles	2.88 m ²	46.40 kg
			Polished	All Colours Shown (Except Décors)	Bla	2 Tiles	2.88 m ²	46.40 kg
02	1200x600mm	6.5mm	Natural	All Colours Shown (Except Décors)	Bla	4 Tiles	2.88 m ²	46.07 kg
			Polished	All Colours Shown	Bla	4 Tiles	2.88 m ²	46.07 kg
03	600x600mm	6.5mm	Natural	LUX01N / 04N / 05N / 08N Only	Bla	5 Tiles	1.80 m ²	27.81 kg
			Polished	LUX01P / 04P / 05P / 08P Only	Bla	5 Tiles	1.80 m ²	27.81 kg
04	300x300mm Square Mosaic	6.5mm	Natural	All Colours Shown (Except Décors)	Bla	6 Sheets	0.54 m ²	7.48 kg

#	Fittings	Thickness	Finish	Availability	Class	Pcs / Box	Lm / Box	Kg / Box
05	1200x60mm R/T Skirting	6.5mm	Natural	All Colours Shown (Except Décors)	Bla	8 Tiles	9.60 lm	9.08 kg
			Polished	All Colours Shown (Except Décors)	Bla	8 Tiles	9.60 lm	9.08 kg

Note: Glazed Porcelain / Bla tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com. (R) Rectified Edge.





Carbon Quartz Natural 1200x1200x6.5mm - LUX08N

TECHNICAL SUPPORT

Specification, Sustainability and Important Information













Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Luxe	 Natural	Internal and External	Internal Only	-	Glazed Porcelain / Bla
	 Polished	Internal and External	Internal Only	-	Glazed Porcelain / Bla

Floor Values

Finish	Colour	PTV (96)	PTV (55)	R Value	Wet Ramp	PEI	Traffic
 Natural	All Colours Shown	Wet 25 - 35	-	R9	A	-	Commercial
 Polished	All Colours Shown	Wet 0 - 24	-	-	-	-	Commercial

Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 35N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	Resistant	Resistant
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	$\leq 0.5\%$	Pass	 Fire Rating		Class A1 FL Non Combustible

Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Luxe	Glazed Porcelain / Bla	Yes	-	Up to 100% (Boxes Only)

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All floor tiles shown in this literature achieve a PTV (96) Dry 36+ test result. PTV (96): Pendulum Test Value - 4S. PTV (55): Pendulum Test Value - TRL. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: technical@johnson-tiles.com.

WHERE TO FIND US

Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com
8:30am - 4:30pm (Monday - Friday)

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0)1782 524 111
Email: technical@johnson-tiles.com

Updated: December 2024