

HUDSON

GLAZED CERAMIC AND PORCELAIN | WALL AND FLOOR TILES

STONE

STRUCTURE

SELECT



www.johnson-tiles.com

© 2024-25 Johnson Tiles Limited

Est. 1901
JOHNSON
TILES

HUDSON



FOUR COLOURS




FOUR SIZES



TWO FINISHES

Hudson's stone effect tiles are complemented by a colour palette that includes the warm sandy tones of New Jersey to the deep, moodier greys of Brooklyn, each evoking a sense of the urban city. Structure comes to the fore with this range, with both Rockfall and Sandbar available in a Matt finish. Rockfall delivers a riven texture, Sandbar features a fragmented linear effect and Natural achieves a weathered, distressed look. Size options are available from 150x150mm up to 600x600mm.





COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation



ALBANY WHITE - ROCKFALL LRV: 56

Product Code (BIII): M HUDS1R



NEW JERSEY - ROCKFALL LRV: 54

Product Code (BIII): M HUDS2R



MANHATTAN - ROCKFALL LRV: 38

Product Code (BIII): M HUDS3R

COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation



ALBANY WHITE - SANDBAR LRV: 56

Product Code (BIII): M HUDS1S



NEW JERSEY - SANDBAR LRV: 54

Product Code (BIII): M HUDS2S



MANHATTAN - SANDBAR LRV: 38

Product Code (BIII): M HUDS3S

COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation



ALBANY WHITE PEI: IV LRV: 56

Product Code (Bla): N HUDS1N



NEW JERSEY PEI: IV LRV: 54

Product Code (Bla): N HUDS2N



MANHATTAN PEI: IV LRV: 38

Product Code (Bla): N HUDS3N









BROOKLYN PEI: II LRV: 16

Product Code (Bla): N HUDS3N

SIZE FORMATS AND AVAILABILITY

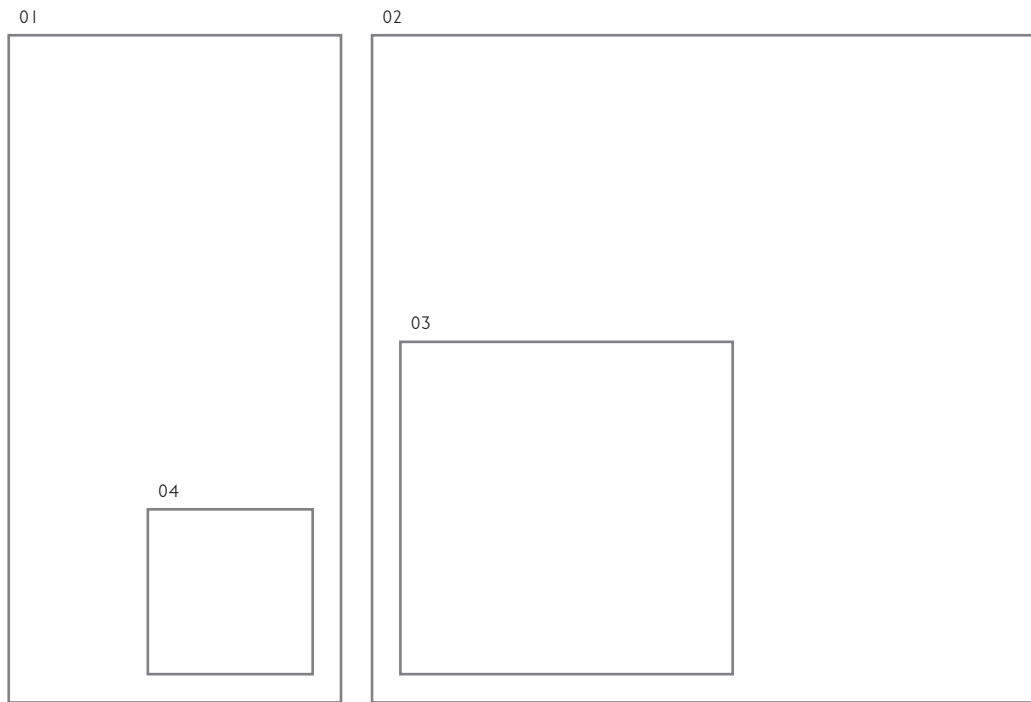Size Options and Packing Information



#	Size Format	Thickness	Finish	Structure	Availability	Class	Pcs / Box	M ² / Box	Kg / Box
01	600x300mm	10mm	 Matt	Rockfall	All Colours Shown	BIII	5 Tiles	0.90 m ²	16.00 kg
				Sandbar	All Colours Shown	BIII	5 Tiles	0.90 m ²	16.00 kg
		9.2mm	 Natural	-	All Colours Shown	Bla	5 Tiles	0.90 m ²	19.30 kg
02	600x600mm	10.5mm	 Natural	-	All Colours Shown	Bla	3 Tiles	1.08 m ²	26.10 kg
03	300x300mm	8.3mm	 Natural	-	All Colours Shown	Bla	13 Tiles	1.17 m ²	21.60 kg
04	150x150mm	8.3mm	 Natural	-	All Colours Shown	Bla	35 Tiles	0.79 m ²	14.25 kg

Note: Glazed Ceramic / BIII tiles and Glazed Porcelain / Bla tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.





Manhattan Natural 600x600x10.5mm - HUDS3N

TECHNICAL SUPPORT

Specification, Sustainability and Important Information













Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Hudson	 Matt	Internal Only	-	-	Glazed Ceramic / BIII
	 Natural	Internal and External	Internal Only	-	Glazed Porcelain / Bla













Floor Values

Finish	Colour	PTV (96)	PTV (55)	R 10	Wet Ramp	PEI	Traffic
 Natural	Brooklyn Only	Wet 36+	-	R 10	-	II	Light Commercial
	ALL Other Colours	Wet 36+	-	R 10	-	IIIV	Commercial

Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 15N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	-	Not Suitable
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	10% to 20%	Pass	 Fire Rating		Class A I Non Combustible

Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 35N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	Resistant	Resistant
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	$\leq 0.5\%$	Pass	 Fire Rating		Class A I FL Non Combustible

Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Hudson	Glazed Ceramic / BIII	Yes	Up to 20%	Up to 100% (Boxes Only)
	Glazed Porcelain / Bla	Yes	Up to 10%	Up to 100% (Boxes Only)

Note: Please contact our technical helpline, or visit our website for specification and installation advice.
EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: technical@johnson-tiles.com.



Wall: Manhattan Rockfall Matt 600x300x10mm - HUDS3R

Wall: Manhattan Sandbar Matt 600x300x10mm - HUDS3S

Floor: Manhattan Natural 600x600x10.5mm - HUDS3N

WHERE TO FIND US

Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com
8:30am - 4:30pm (Monday - Friday)

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0)1782 524 111
Email: technical@johnson-tiles.com

Updated: June 2025