

COUNTRY STONES

GLAZED VITRIFIED | WALL TILES

STONE EFFECT TILES **INTRO**



JOHNSON • TILES 
MADE IN THE UK SINCE 1901

COUNTRY STONES

Country Stones is a small format ceramic wall tile range with a rustic effect, designed to create a comforting, cottage feel. The natural colour palette echoes this rural sentiment with shades including Clay Brown, an earthy welcoming shade, Millstone White, a light comforting tone, and Summer Storm for statement depth. Country Stones mirrors the look of natural stone, making this range perfect to pair outdoor influences with cottage chic.

*Front Cover Image: Clay Brown Satin 100x100mm - COS01A, Barley Cream Satin 100x100mm - COS02A
& Millstone White Satin 100x100mm - COS03A*



Clay Brown Satin 100x100mm - COS01A
Barley Cream Satin 100x100mm - COS02A
Millstone White Satin 100x100mm - COS03A





Colours & Product Codes

V2: Low to Moderate Shade Variation



CLAY BROWN

☐ COS01A LRV: 24



BARLEY CREAM

☐ COS02A LRV: 54



MILLSTONE WHITE

☐ COS03A LRV: 62



DOVETAIL

☐ COS04A LRV: 53




HEARTH GREY

☐ COS05A LRV: 31



SUMMER STONE

☐ COS06A LRV: 16




MIDNIGHT

☐ COS07A LRV: 8



Sizes, Finishes & Availability

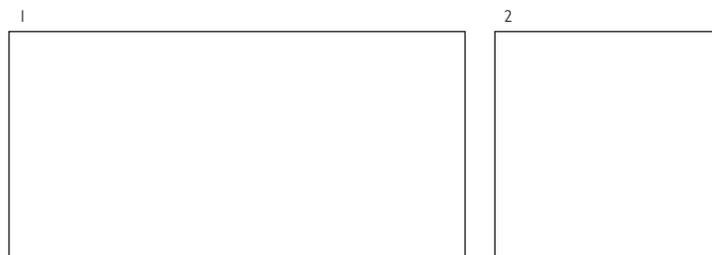

#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	200x100mm	☐ Satin	Dovetail, Millstone White & Clay Brown Only	6.5mm	50 Tiles	1.00 m ²	10.80 kg
2	100x100mm	☐ Satin	All Colours Shown	6.5mm	100 Tiles	1.00 m ²	12.60 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Country Stones	All Sizes Shown	Internal Only	-	-	V2	Glazed Vitrified [Blla]

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm ²	Pass
Thickness EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Pass
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Pass
Water Absorption EN ISO 10545 - 3	10% to 20%	Pass	Fire Rating	-	Class A1 Non Combustible
Weight / M ²	10.08 kg 6.5mm thick				

Note: All products are classed as Blla - Glazed Vitrified. All products conform to BS EN 14411.

Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Country Stones	Glazed Vitrified [Blla]	-	Up to 10%	-	Up to 100%

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Country Stones or
any of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: October 2015 Updated: August 2021

JOHNSON • TILES 
MADE IN THE UK SINCE 1901