

TUNDRA

GLAZED CERAMIC | WALL TILES

PLAIN COLOUR TILES **INTRO**



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

TUNDRA

A collection of plain and textured white ceramic tiles, Tundra is perfect for mixing and matching. Available in 360x275mm, Tundra offers gloss and satin finishes, with complementary Dimensions options available to create textured elements for standout design features.

Front Cover Image: White Dimensions Structure Gloss 360x275mm - DMNS1A




White Matt 360x275mm - TUND2A





Colours & Product Codes

V1: Low Shade Variation



WHITE

ⓐ TUND1A + Ⓜ TUND2A LRV: 86




WHITE DIMENSIONS STRUCTURE

ⓐ DMNS1A + Ⓜ DMNS2A LRV: 86



Sizes, Finishes & Availability

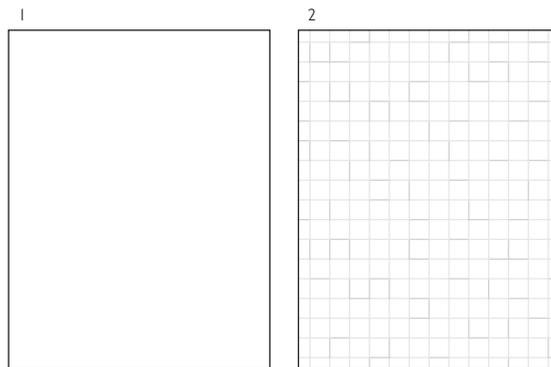

#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	360x275mm	ⓐ Gloss	White	8mm	10 Tiles	0.99 m ²	14.00 kg
		Ⓜ Matt	White	8mm	10 Tiles	0.99 m ²	14.00 kg
2	360x275mm Dimensions Structure	ⓐ Gloss	White	8mm	10 Tiles	0.99 m ²	14.00 kg
		Ⓜ Matt	White	8mm	10 Tiles	0.99 m ²	14.00 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. ALL LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Tundra	All Sizes Shown	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\leq \pm 0.25\%$	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm ²	$\geq 25\text{N} / \text{mm}^2$
Thickness EN ISO 10545 - 2	$\pm 1.0\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.15\%$	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A - B
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.3\%$	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 3
Water Absorption EN ISO 10545 - 3	10% to 20%	15% to 17%	Fire Rating	-	Class A1 Non Combustible
Weight / M ²	14.10 kg 8mm thick				

Note: All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD
Tundra	Glazed Ceramic [BIII]	Up to 20%	Up to 100%	Up to 100%	Yes

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Tundra or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

JOHNSON • TILES 
MADE IN THE UK SINCE 1901