SOUTH BANK

GLAZED CERAMIC | WALL TILES


















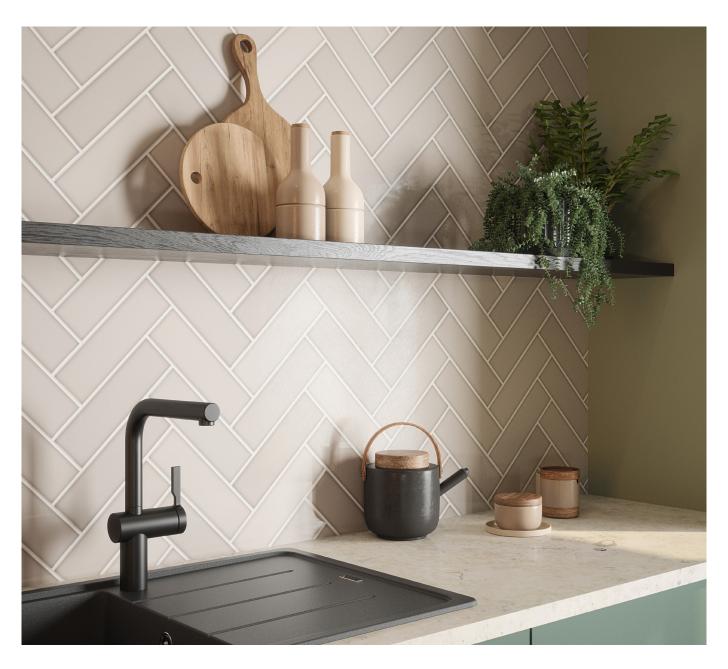

f X ⊙ ♂ P in □ www.johnson-tiles.com © 2024-25 Johnson Tiles Limited



SOUTH BANK

⊗ EIGHT COLOURS **⋈** ONE SIZE

ONE FINISH

South Bank is a sleek range of ceramic wall tiles, available in eight on-trend colours, and a new slim size of 245x75mm. South Bank offers a transparent gloss finish possessing depth and variation of contemporary colour. The slim format allows for the creation of truly unique lay patterns to maximise the creative possibilities within any interior. Featuring the signature colours of Azure, Blossom and Dusk, which are underpinned by a complementary, neutral palette ranging from the subtle, calming Snow to the warmer hue of Pearl, this range allows for the creation of diverse and harmonious colour combinations.









COLOURS AND PRODUCT CODES

V3: Modeate to High Shade Variation

SNOW LRV: 86

Product Code: G SKB01A



PEARL LRV: 64

Product Code: G SKB02A



WHIPSER LRV: 55

Product Code: G SKB03A



PEWTER LRV: 32

Product Code: G SKB04A

www.johnson-tiles.com

COLOURS AND PRODUCT CODES

V3: Modeate to High Shade Variation



DOVE LRV: 26

Product Code: G SKB05A



AZURE LRV: 14

Product Code: G SKB06A



DUSK LRV: 17

Product Code: G SKB07A



BLOSSOM LRV: 32

Product Code: G SKB08A

SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information



#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M² / Box	Kg / Box
01	245x75mm	8mm	G Gloss	All Colours Shown	BIII	54 Tiles	0.99 m²	16.00 kg

Note: Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.



TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
South Bank	G Gloss	Internal Only	-	-	Glazed Ceramic / BIII

Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
Length / Width EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545-4	Min. 15N / mm²	Pass
Thickness EN ISO 10545-2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545-9	Pass	Pass
Straightness of Side EN ISO 10545-2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545-12	-	Not Suitable
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
Surface Flatness EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
Water Absorption EN ISO 10545-3	10% to 20%	Pass	Fire Rating		Class A I Non Combustible

Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
South Bank	Glazed Ceramic / BIII	Yes	Up to 20%	Up to 100% (Boxes Only)

Note: Please contact our technical helpline, or visit our website for specification and installation advice. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0) 1782 524 111 or email: technical@johnson-tiles.com.

7 www.johnson-tiles.com

WHERE TO FIND US

Head Office

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ, United Kingdom

Tel: +44 (0) 1782 575 575 Email: info@johnson-tiles.com www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street, London, WIW 8BB, United Kingdom

Tel: +44 (0)20 7436 8629 Email: info@material-lab.co.uk www.material-lab.co.uk

Factory Outlet

Tel: +44 (0) 1782 524 040 Email: foutlet@johnson-tiles.com www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0) 1782 524 000 Email: sales@johnson-tiles.com 8:30am - 4:30pm (Monday - Friday)

Order A Sample

Tel: +44 (0) 1782 524 043 Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0) 1782 524 111 Email: technical@johnson-tiles.com JOHNSON TILES

www.johnson-tiles.com | f × ② & P in ■