

STAMFORD

GLAZED PORCELAIN & CERAMIC | FLOOR & WALL TILES

CONCRETE

WOOD

ABSOLUTE



JOHNSON • TILES 

MADE IN THE UK SINCE 1901

STAMFORD



6 SIZES



4 COLOURS



3 FINISHES

This comprehensive collection is comprised of both concrete and wood effect floor and wall tiles offering surface variation. The large-format concrete effect tiles feature realistic detail for pared-back interiors, whilst the wood effect planks add nature-inspired elegance. Also available are geometric décor glazed ceramic wall tiles which evoke Origami effects characteristic of the Serenity trend for a modern aesthetic.





Bone Natural | 200x1200x9mm - SMF01N
Wood Bone Natural | 200x200x9.5mm - SMF01W



Bone Geometric Structure Matt 1200x400x11.2mm - SMF01D
 Pebble Natural 1200x1200x9mm - SMF03N




Bone Natural 1200x1200x9 mm - SMF01N
 Wood Bone Natural 1200x200x9.5mm - SMF01W






Silver Matt 1200x400x10.9mm - SMF02M
 Silver Geometric Structure Matt 1200x400x11.2mm - SMF02D
 Charcoal Natural 1200x600x10.5mm - SMF04N



Size Formats Sizing & Packing Information

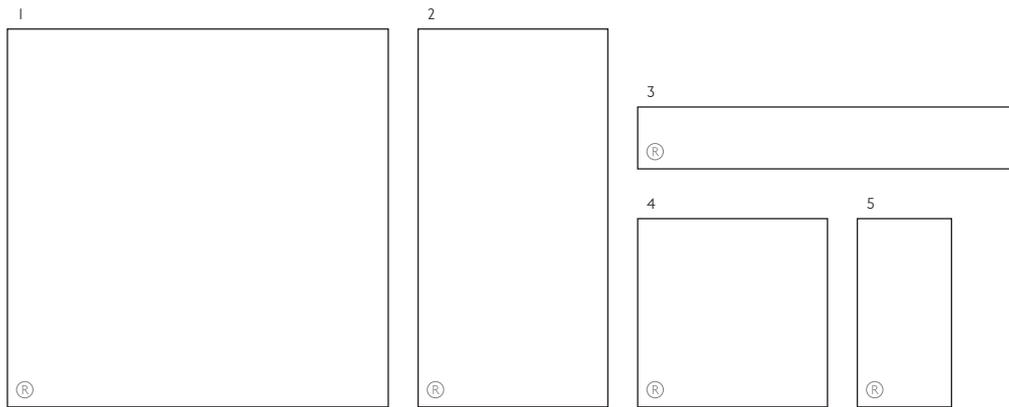

6 - Wall Tiles Only (Bill)

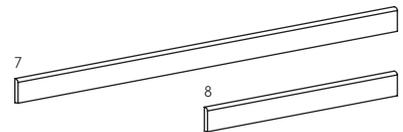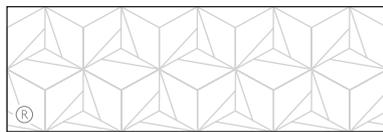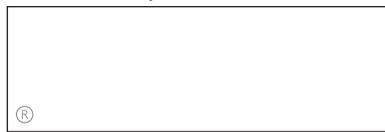

#	Size	Thickness	Finish	Structure	Colour Availability	Pcs / Box	M2 / Box	Kg / Box
1	1200x1200mm	9mm	N Natural	-	All Colours	1 Tile	1.44m ²	30.32kg
			G Grip	-	Bone & Silver Only	1 Tile	1.44m ²	30.32kg
2	1200x600mm	10.5mm	N Natural	-	All Colours	2 Tiles	1.44m ²	35.50kg
			G Grip	-	All Colours	2 Tiles	1.44m ²	35.50kg
3	1200x200mm	9.5mm	N Natural	-	Wood Colours Only	5 Tiles	1.20m ²	27.00kg
4	600x600mm	10mm	N Natural	-	All Colours	3 Tiles	1.08m ²	24.00kg
5	600x300mm	10mm	N Natural	-	All Colours	6 Tiles	1.08m ²	23.50kg

6	1200x400mm	10.9mm	M Matt	-	All Colours	3 Tiles	1.44m ²	28.35kg
		11.2mm	M Matt	Geometric	All Colours	3 Tiles	1.44m ²	28.35kg

#	Fitting	Thickness	Finish	Structure	Colour Availability	Pcs / Box	LM / Box	Kg / Box
7	1200x75mm Round Top Skirting	10.5mm	N Natural	-	All Colours	9 Tiles	10.80lm	16.98kg
8	600x75mm Round Top Skirting	10mm	N Natural	-	All Colours	15 Tiles	9.00lm	16.98kg

Note: All sizes indicated are metric modular. All sizes shown are nominal. (R) Rectified Edge.
For the most up-to-date product availability information for this range, please visit our website - www.johnson-tiles.com



Silver Natural 1200x1200x9mm - SMF02N
Wood Silver Natural 1200x200x9.5mm - SMF02W



Colours & Product Codes

V2: Low to Moderate Shade Variation



BONE LRV: 53 PEI: IV

Product Codes (Bla): N SMF01N + G SMF01G | Fitting Codes (Bla): N SMF1NS



SILVER LRV: 32 PEI: III

Product Codes (Bla): N SMF02N + G SMF02G | Fitting Codes (Bla): N SMF2NS



PEBBLE LRV: 18 PEI: II

Product Codes (Bla): N SMF03N + G SMF03G | Fitting Codes (Bla): N SMF3NS



CHARCOAL LRV: 19 PEI: III

Product Codes (Bla): N SMF04N + G SMF04G | Fitting Codes (Bla): N SMF4NS



Colours & Product Codes

V2: Low to Moderate Shade Variation



WOOD BONE (LRV: 53) (PEI: IV)

Product Codes (Bla): (N) SMF01W



WOOD SILVER (LRV: 38) (PEI: III)

Product Codes (Bla): (N) SMF02W



WOOD PEBBLE (LRV: 24) (PEI: II)

Product Codes (Bla): (N) SMF03W



WOOD CHARCOAL (LRV: 16) (PEI: III)

Product Codes (Bla): (N) SMF04W



Colours & Product Codes

V2: Low to Moderate Shade Variation



BONE (LRV: 61)

Product Codes (BIII) Wall Tiles Only: (M) SMF01M



BONE GEOMETRIC STRUCTURE (LRV: 61)

Product Codes (BIII) Wall Tiles Only: (M) SMF01D



SILVER (LRV: 50)

Product Codes (BIII) Wall Tiles Only: (M) SMF02M



SILVER GEOMETRIC STRUCTURE (LRV: 50)

Product Codes (BIII) Wall Tiles Only: (M) SMF02D



Technical, Sustainability & Important Information

Specification

Range	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Stamford	Natural	Internal & External	Internal Only	-	V2	Glazed Porcelain (Bla)
	Grip	Internal & External	Internal & External	Yes	V2	Glazed Porcelain (Bla)
	Matt	Internal Only	-	-	V2	Glazed Ceramic (BIII)

Floor Values

Finish	Structure	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
Natural	-	Bone	Dry 36+ Wet 36+	-	R10	C	IV	Commercial
	-	Silver & Charcoal	Dry 36+ Wet 36+	-	R10	C	III	Light Commercial
	-	Pebble	Dry 36+ Wet 36+	-	R10	C	II	Domestic
Grip	-	Bone	Dry 36+ Wet 36+	Wet 36+	R11	-	IV	Commercial
	-	Silver & Charcoal	Dry 36+ Wet 36+	Wet 36+	R11	-	III	Light Commercial
	-	Pebble	Dry 36+ Wet 36+	Wet 36+	R11	-	II	Domestic

Physical Properties - Glazed Porcelain (Bla)

Test & Standard	Requirement	Test Result	Test & Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	$\pm 0.1\%$	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm ²	Pass
Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	$\pm 0.5\%$	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	$\pm 0.22\%$	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.22\%$	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class B
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.22\%$	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Pass
Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	Pass	Fire Rating	-	Class A I FL Non Combustible
Weight / M ²	24.66kg 10.5mm thick	22.33kg 10mm thick	22.50kg 9.5mm thick	21.06kg 9mm thick	

Physical Properties - Glazed Ceramic (BIII)

Test & Standard	Requirement	Test Result	Test & Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.5\%$	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm ²	Pass
Thickness EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	$\pm 0.5\text{mm}$	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.07\%$	Frost Resistance EN ISO 10545 - 12		Not Suitable
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.07\%$	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.15\%$	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	10% to 20%	$\geq 10\%$	Fire Rating	-	Class A I Non Combustible
Weight / M ²	19.67kg 11.2mm thick	19.67kg 10.9mm thick			

Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Stamford	Glazed Porcelain (Bla)	Yes	Up to 40%	Up to 100% (Boxes)	Up to 100% (Boxes)
	Glazed Ceramic (BIII)	Yes	Up to 40%	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications.

Please contact our technical helpline, or visit our website for specification and installation advice. All glazed porcelain (Bla) and glazed ceramic (BIII) products listed conform to BS EN 14411. CSV: Colour Shade Variation. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.



Technical, Sustainability & Important Information

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles, several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed. For a comprehensive colour, size and finish overview along with full technical and sustainability information for all of the product shown in this product presenter, please visit our website - www.johnson-tiles.com.

- All sizes shown are metric modular.
- For specific suitability details please contact our technical department.
- Johnson Tiles cannot accept responsibility for tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does/will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2022 Johnson Tiles. All rights reserved.



All product technical values quoted in this product presenter are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles are British Standard registered and all products conform to the standards set in BS EN 14411.

For the reassurance of single-source supply, Johnson Tiles offers a free of charge NBS M40 specification writing service featuring the Norcros Adhesives range of tile fixing products. To find out more or for any questions or queries relating to any tile related technical information featured in this product presenter, please contact our technical advice helpline on +44 (0) 1782 524 111 or email ddunlop@johnson-tiles.com

The colours shown in this sample tile wallet and attached booklet are as accurate as printing processes will allow. Please refer to actual product samples before specifying. Every effort has been made to ensure the accuracy of the information given.



Pebble Natural | 200x1200x9mm - SMF03N

For more information about Stamford or any of our other product ranges simply visit

www.johnson-tiles.com | [f](#) [t](#) [i](#) [p](#) [in](#) [v](#)

Where To Find & Contact Us

Johnson Tiles Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Johnson Tiles Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice

Tel: +44 (0)1782 524 111
Email: ddunlop@johnson-tiles.com

Launched: March 2022

JOHNSON • TILES 
MADE IN THE UK SINCE 1901

Johnson Tiles is a division of Norcross Group (Holdings) Limited,
Ladyfield House, Station Road, Wilmslow, Cheshire, SK9 1BU,
United Kingdom. Registered in England number 566694.