

GLADEMOOR

GLAZED PORCELAIN AND CERAMIC | FLOOR AND WALL TILES

STONE

STRUCTURE

MOSAIC

SELECT



www.johnson-tiles.com

© 2024-25 Johnson Tiles Limited

Est. 1901
JOHNSON
TILES

GLADEMOOR



FIVE COLOURS



SIX SIZES



FIVE FINISHES

Replicating natural materials, Glademoor takes direction from the interiors trend for earth tones with five colours of Stone, Sand, Flint, Coal, and Bone. Glademoor also features two mixed décor options which combine hues from across the colour palette to create a stylish focal point for added detail and surface interest, whilst the weave structured design delivers a stunning statement to combine seamlessly with the field tiles. The Bush Hammered and Grip+ finishes provides a PTV slip resistance rating of 36+ to add to the versatility of this range.





COLOURS AND PRODUCT CODES


V3: Moderate to High Shade Variation



BONE PEI: IV LRV: 86

Product Code (Bla): [N] GLA01N + [L] GLA01L + [B] GLA01B + [E] GLA01E | Product Code (BIII): [M] GLA01M

Fitting Code (Bla): [N] GLA1NS + [L] GLA1LS | Mosaic Code (Bla): [N] GLA1NM + [L] GLA1LM

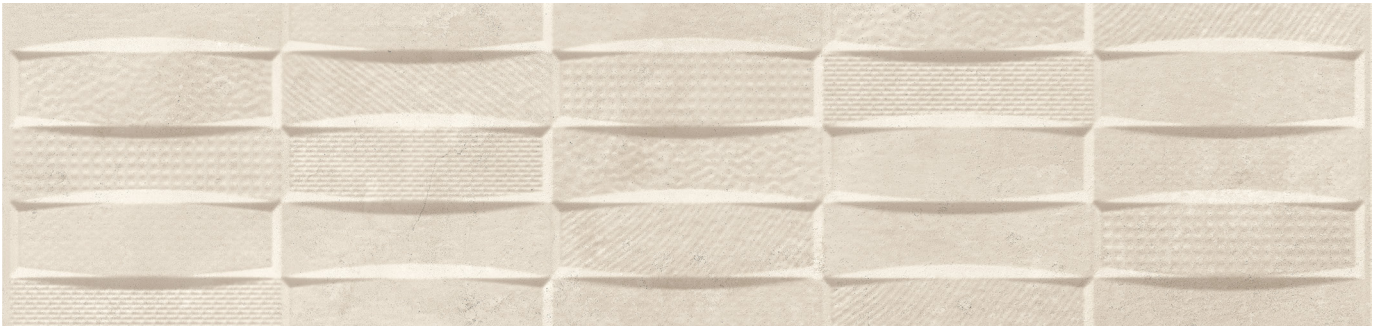

BONE - WEAVE LRV: 86

Product Code (BIII): [M] GLA01W



STONE PEI: IV LRV: 80

Product Code (Bla): [N] GLA02N + [L] GLA02L + [B] GLA02B + [E] GLA02E | Product Code (BIII): [M] GLA02M

Fitting Code (Bla): [N] GLA2NS + [L] GLA2LS | Mosaic Code (Bla): [N] GLA2NM + [L] GLA2LM



STONE - WEAVE LRV: 80

Product Code (BIII): [M] GLA02W

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation



SAND PEI: IV LRV: 66

Product Code (Bla): N GLA03N + L GLA03L + B GLA03B

Fitting Code (Bla): N GLA3NS + L GLA3LS | Mosaic Code (Bla): N GLA3NM + L GLA3LM



FLINT PEI: IV LRV: 55


Product Code (Bla): N GLA04N + L GLA04L + B GLA04B + E GLA04E | Product Code (BIII): M GLA04M

Fitting Code (Bla): N GLA4NS + L GLA4LS | Mosaic Code (Bla): N GLA4NM + L GLA4LM



FLINT - WEAVE LRV: 55

Product Code (BIII): M GLA04W

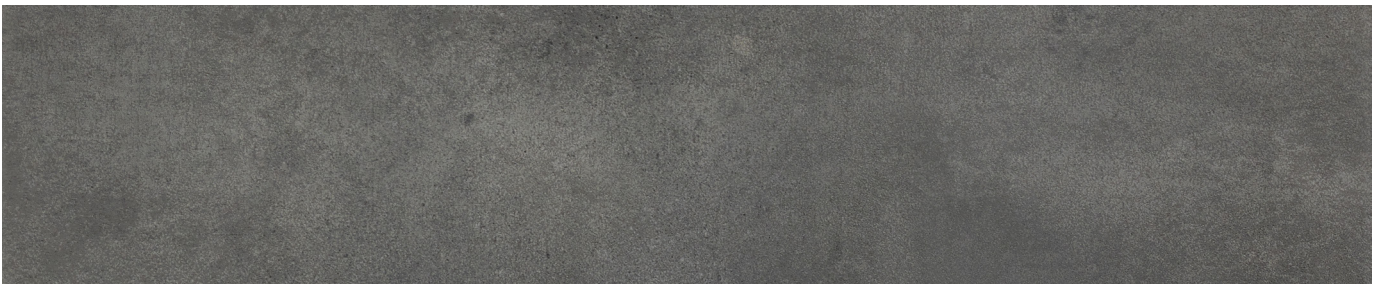


COAL PEI: IV LRV: 22

Product Code (Bla): N GLA05N + L GLA05L + B GLA01B | Product Code (BIII): M GLA05M

Fitting Code (Bla): N GLA5NS + L GLA5LS | Mosaic Code (Bla): N GLA5NM + L GLA5LM

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation

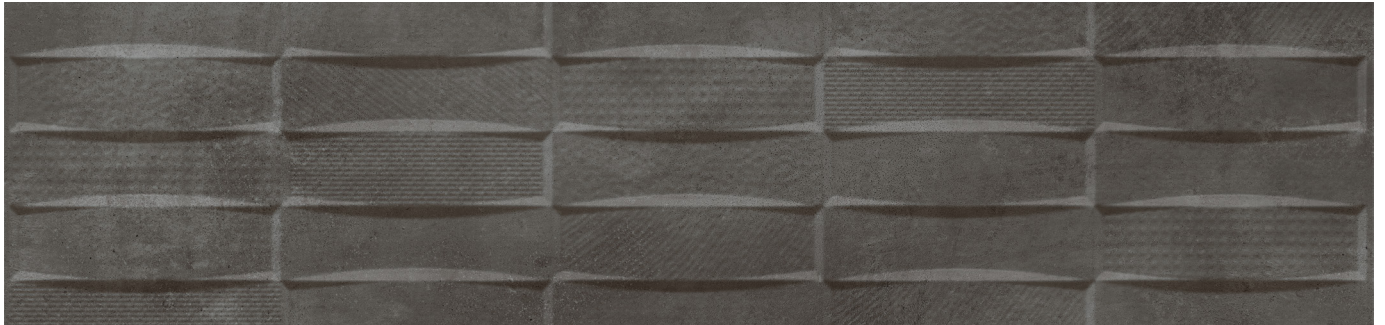

COAL - WEAVE LRV: 22

Product Code (BIII): M GLA05W



BONE, STONE AND SAND - MIX DÉCOR

Product Code (Bla): N GLA01D



FLINT AND COAL - MIX DÉCOR

Product Code (Bla): N GLA02D




Wall: Stone Natural 600x300x9.2mm - GLA02N

Wall: Bone, Stone and Sand Mix Décor Natural 600x300x9.2mm- GLA01D

Floor: Sand Natural 600x600x9.2mm - GLA03N

SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

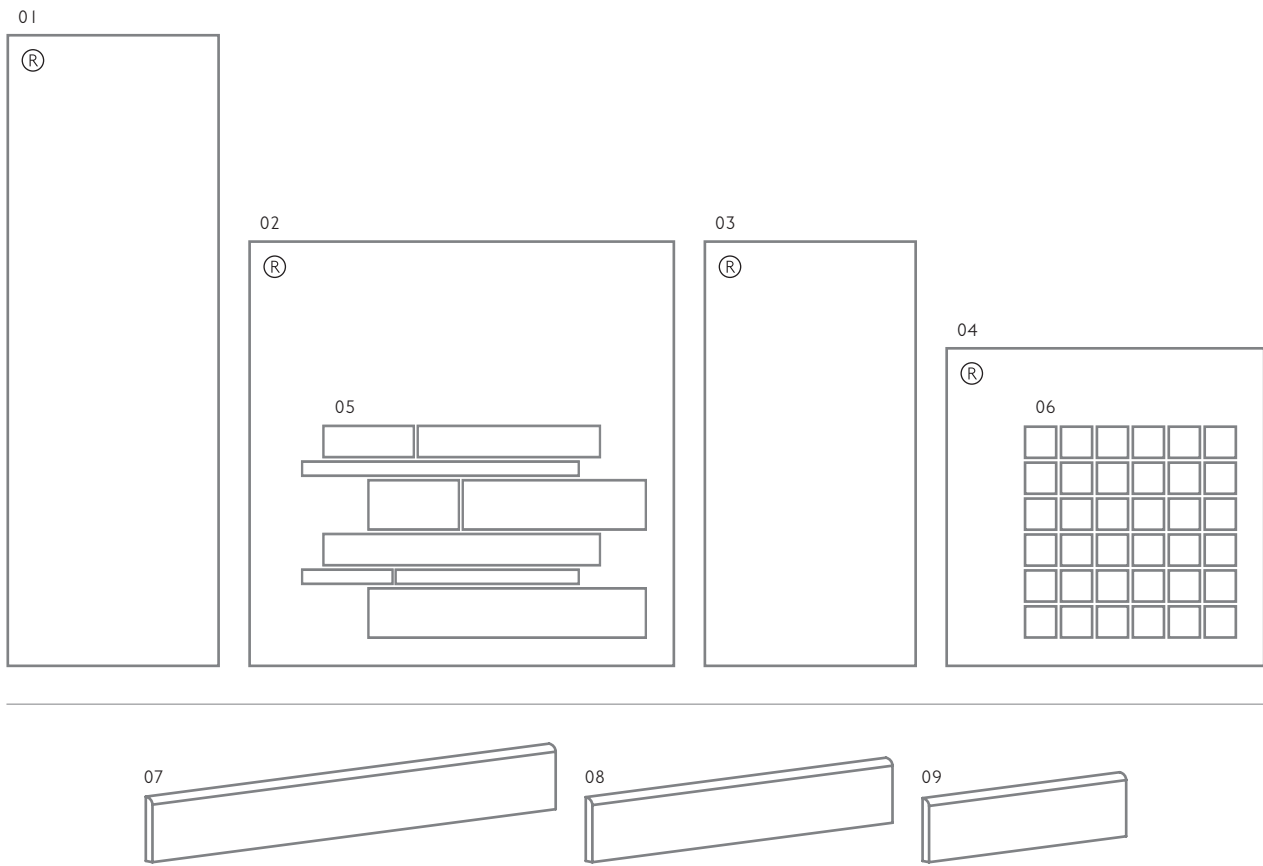

#	Size Format	Thickness	Finish	Structure	Availability	Class	Pcs / Box	M ² / Box	Kg / Box
01	890x300mm	10.5mm	Matt	-	All Colours Shown	BIII	5 Tiles	1.32 m ²	22.04 kg
				Weave	All Colours Shown	BIII	5 Tiles	1.34 m ²	22.04 kg
02	600x600mm	9.2mm	Natural	-	All Colours Shown	Bla	3 Tiles	1.08 m ²	23.03 kg
			Lapato	-	All Colours Shown	Bla	3 Tiles	1.08 m ²	23.03 kg
			Bush Hammered	-	All Colours Shown	Bla	3 Tiles	1.08 m ²	23.03 kg
		20mm	Grip+ 2cm	-	Bone, Stone and Flint Only	Bla	2 Tiles	0.72 m ²	32.02 kg
03	600x300mm	9.2mm	Natural	-	All Colours Shown	Bla	5 Tiles	0.90 m ²	19.26 kg
				-	Mix Décor Colours Only	Bla	5 Tiles	1.08 m ²	23.03 kg
			Lapato	-	All Colours Shown	Bla	5 Tiles	0.90 m ²	22.36 kg
			Bush Hammered	-	All Colours Shown	Bla	5 Tiles	0.90 m ²	19.26 kg
04	450x450mm	9.2mm	Natural	-	All Colours Shown	Bla	5 Tiles	1.02 m ²	21.50 kg
			Lapato	-	All Colours Shown	Bla	5 Tiles	1.02 m ²	21.50 kg
			Bush Hammered	-	All Colours Shown	Bla	5 Tiles	1.02 m ²	21.50 kg
05	485x300mm Strip Mosaic	9.2mm	Natural	-	All Colours Shown	Bla	6 Sheets	0.88 m ²	17.34 kg
			Lapato	-	All Colours Shown	Bla	6 Sheets	0.88 m ²	17.34 kg
06	300x300mm Square Mosaic	9.2mm	Natural	-	All Colours Shown	Bla	10 Sheets	0.90 m ²	16.80 kg

#	Fittings	Thickness	Finish	Structure	Availability	Class	Pcs / Box	Lm / Box	Kg / Box
07	600x95mm R/T Skirting	9.2mm	Natural	-	All Colours Shown	Bla	18 Tiles	10.80 lm	17.80 kg
			Lapato	-	All Colours Shown	Bla	18 Tiles	10.80 lm	17.80 kg
08	450x95mm R/T Skirting	9.2mm	Natural	-	All Colours Shown	Bla	23 Tiles	10.35 lm	20.00 kg
			Lapato	-	All Colours Shown	Bla	23 Tiles	10.35 lm	20.00 kg
09	300x95mm R/T Skirting	9.2mm	Natural	-	All Colours Shown	Bla	30 Tiles	9.00 lm	17.80 kg
			Lapato	-	All Colours Shown	Bla	30 Tiles	9.00 lm	17.80 kg

Note: Glazed Porcelain / Bla and Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com. (R) Rectified Edge.

TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Glademoor	 Natural	Internal and External	Internal Only	-	Glazed Porcelain / Bla
	 Lapato	Internal and External	Internal Only	-	Glazed Porcelain / Bla
	 Bush Hammered	Internal and External	Internal and External	Yes	Glazed Porcelain / Bla
	 Grip+ 2cm	-	Internal and External	Yes	Glazed Porcelain / Bla
	 Matt	Internal Only	-	-	Glazed Ceramic / BIII

Floor Values

Finish	Colour	PTV (96)	PTV (55)	R Value	Wet Ramp	PEI	Traffic
 Natural	All Colours Shown	Wet 0 - 24	-	-	-	IV	Commercial
 Lapato	All Colours Shown	Wet 0 - 24	-	-	-	IV	Commercial
 Bush Hammered	All Colours Shown	Wet 36+	Wet 36+	R II	C	IV	Commercial
 Grip+ 2cm	All Colours Shown	Wet 36+	Wet 36+	R II	B	IV	Commercial

Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 35N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	Resistant	Resistant
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	$\leq 0.5\%$	Pass	 Fire Rating		Class A I FL Non Combustible

Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 15N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	-	Not Suitable
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	10% to 20%	Pass	 Fire Rating		Class A I Non Combustible

Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Glademoor	Glazed Porcelain / Bla	Yes	Up to 10%	Up to 100% (Boxes Only)
	Glazed Ceramic / BIII	Yes	Up to 10%	Up to 100% (Boxes Only)

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All floor tiles shown in this literature achieve a PTV (96) Dry 36+ test result. PTV (96): Pendulum Test Value - 4S. PTV (55): Pendulum Test Value - TRL. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Important Information


During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: technical@johnson-tiles.com.

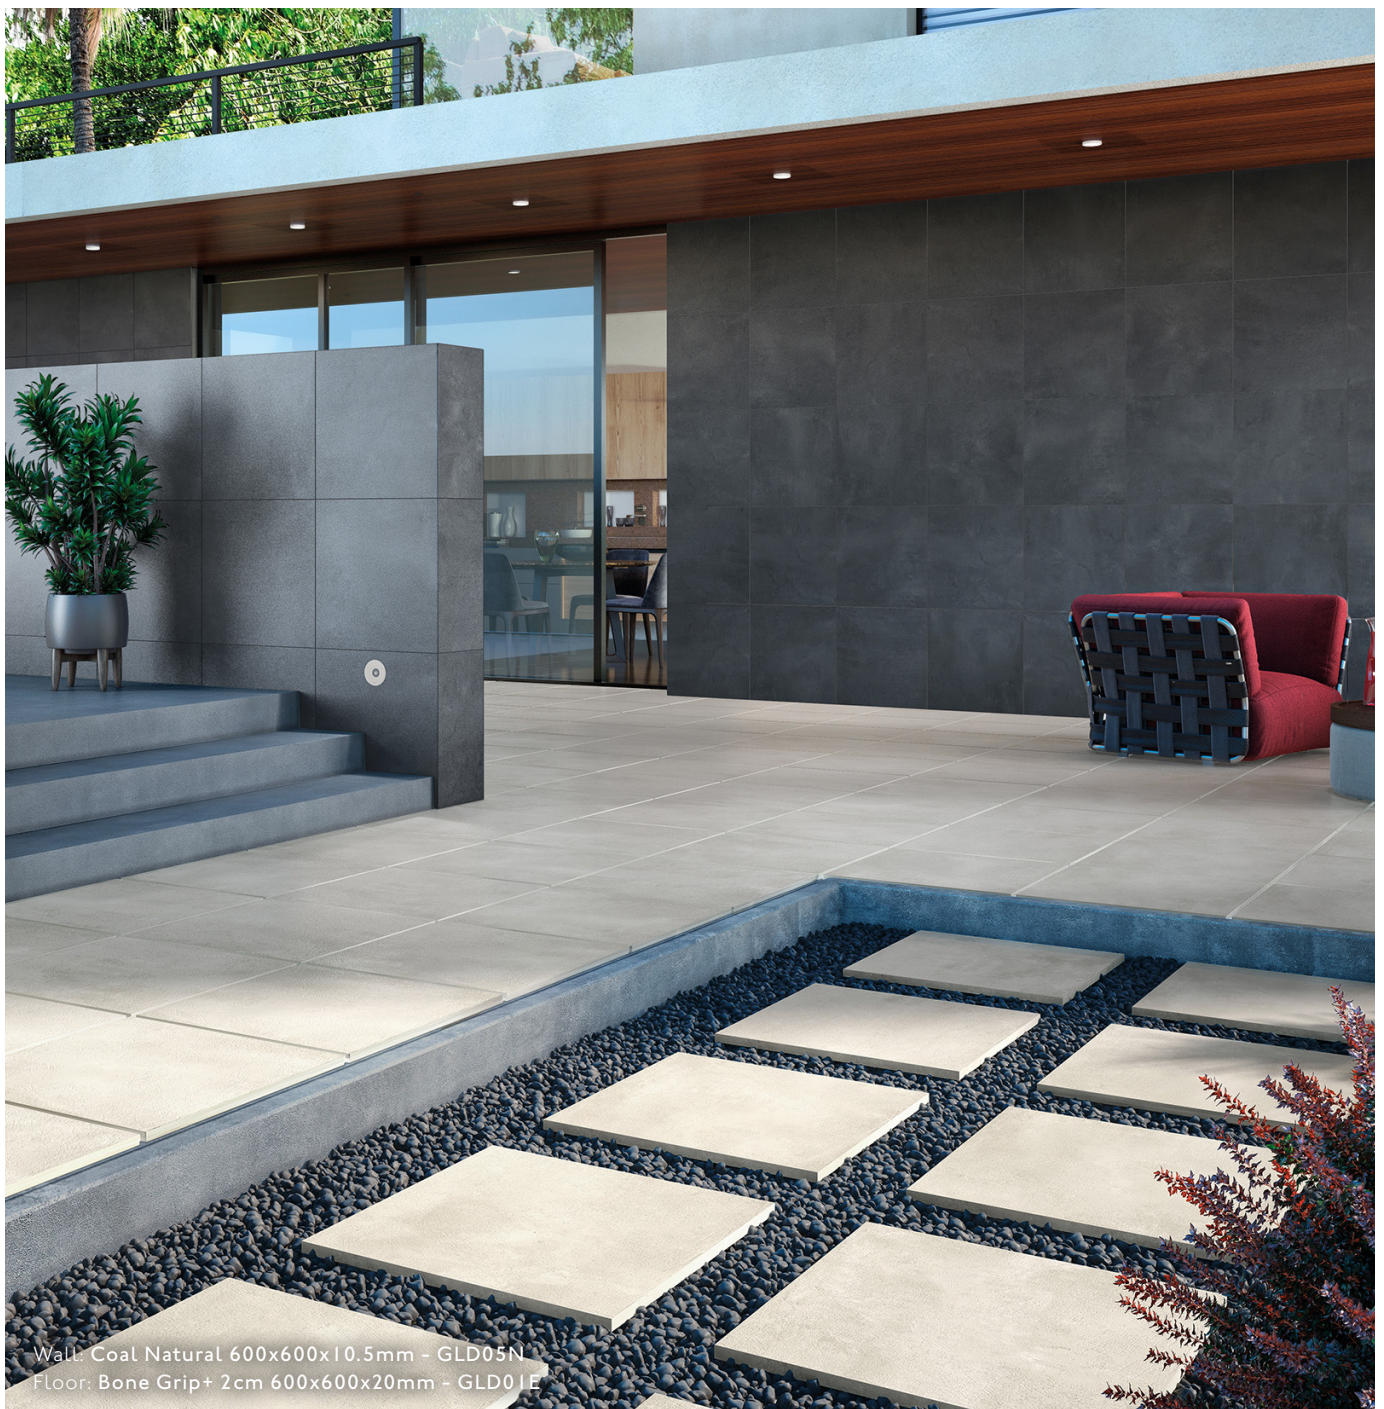

Wall: Coal Natural 600x600x10.5mm - GLD05N
Floor: Bone Grip+ 2cm 600x600x20mm - GLD01E

WHERE TO FIND US

Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com
8:30am - 4:30pm (Monday - Friday)

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0)1782 524 111
Email: technical@johnson-tiles.com

Updated: June 2025