


HEX25

GLAZED PORCELAIN | FLOOR & WALL TILES

PLAIN COLOUR/PATTERNED TILES ABSOLUTE

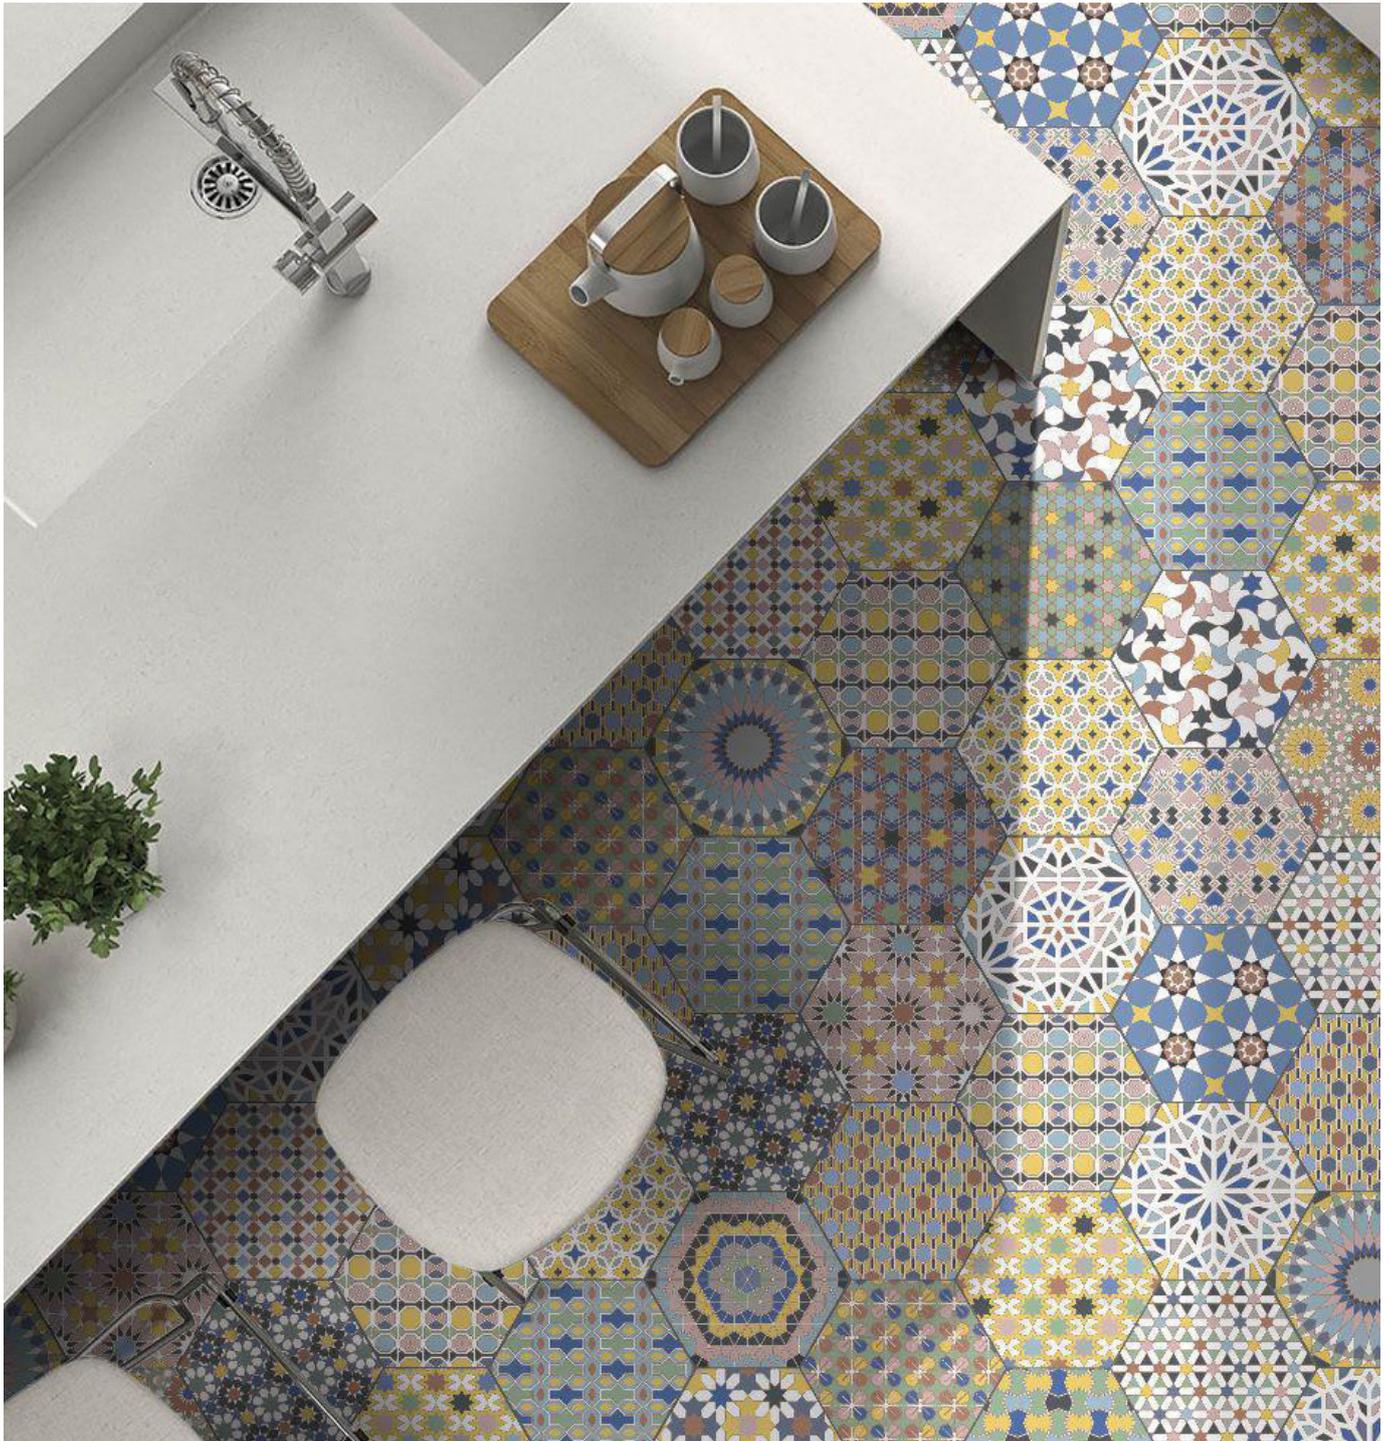

JOHNSON · TILES 

MADE IN THE UK SINCE 1901

HEX25

Hex25 offers a contemporary colour palette of muted tones coupled with richer vibrant colours. Thirteen base field colours are available in a small format hexagon to deliver geometric patterning. Four décor options are also featured, allowing creativity and flair to come to the fore with designs such as Trident and Aster.

Front Cover Image: Kasbah Mix Natural 250x220mm Hexagon - HEX22F



Fantasy Mix Natural 250x220mm - HEX19F





Roomset Photography



White Natural 250x220mm - HEX04F
Black Natural 250x220mm - HEX01F
Grey Natural 250x220mm - HEX02F
Silver Natural 250x220mm - HEX03F



Aster Blanco Natural 250x220mm - HEX16F




White Natural 250x220mm - HEX04F
Black Natural 250x220mm - HEX01F
Grey Natural 250x220mm - HEX02F
Silver Natural 250x220mm - HEX03F



Colours & Product Codes


V1: Low Shade Variation



WHITE

(N) HEX04F + (A) HEX04A


(PEI: IV) (LRV: 74)

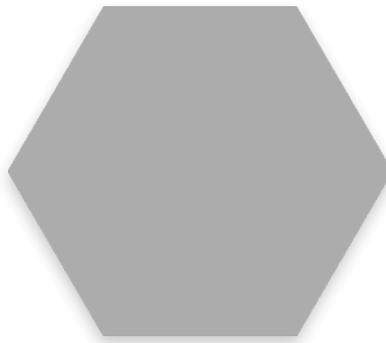

SILVER

(N) HEX03F + (A) HEX03A


(PEI: IV) (LRV: 6)

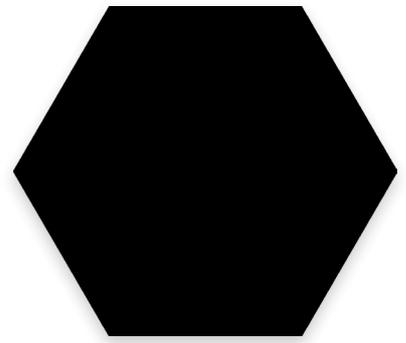

BLACK


(N) HEX01F + (A) HEX01A

(PEI: III) (LRV: 6)

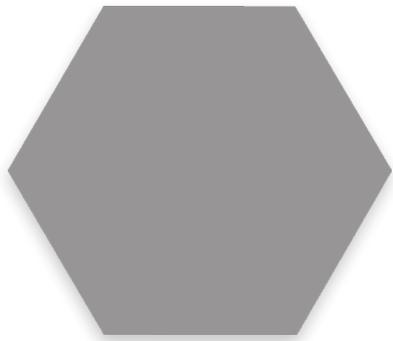


GREY

(N) HEX02F (PEI: IV) (LRV: 21)

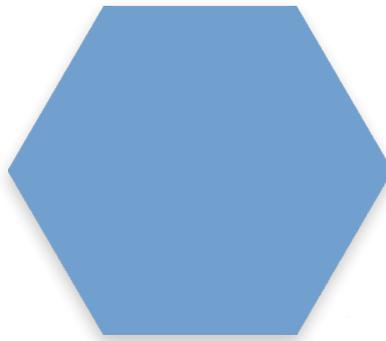


BLUE

(N) HEX05F (PEI: IV) (LRV: 21)

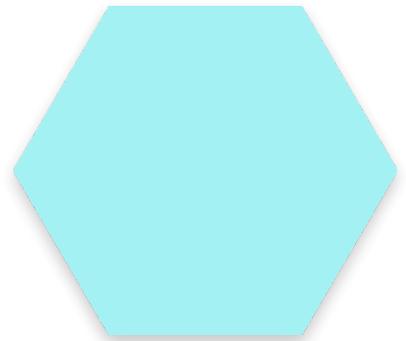


AQUA

(N) HEX06F (PEI: IV) (LRV: 48)

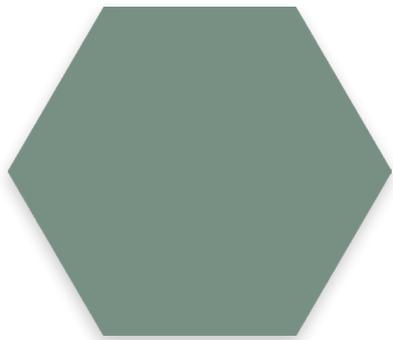


KALE

(N) HEX07F (PEI: III) (LRV: 24)

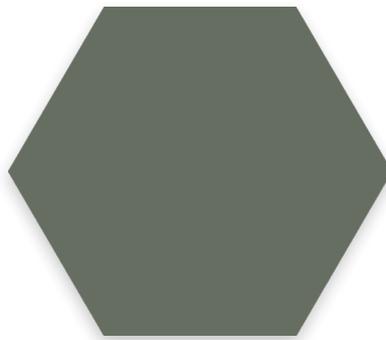


MOSS

(N) HEX09F (PEI: III) (LRV: 16)




COTTON

(N) HEX10F (PEI: IV) (LRV: 72)

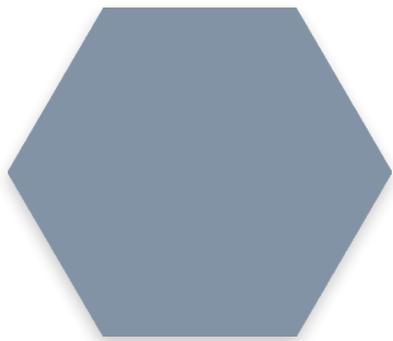


MID BLUE

(N) HEX11F (PEI: III) (LRV: 16)

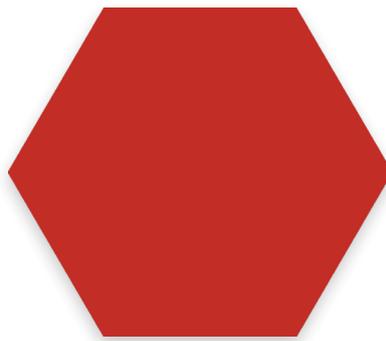


RED

(N) HEX12F (PEI: III) (LRV: 19)

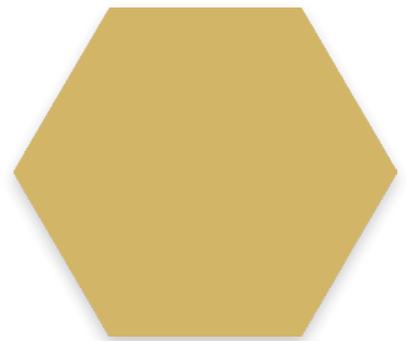


DANDELION

(N) HEX13F (PEI: IV) (LRV: 47)

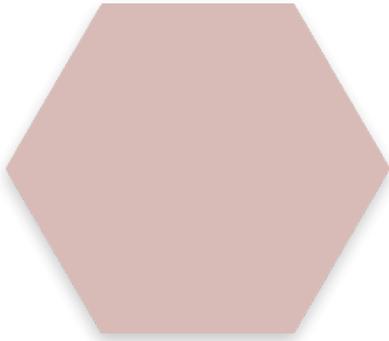

ROSE

(N) HEX I 5F (PEI: IV) (LRV: 53)

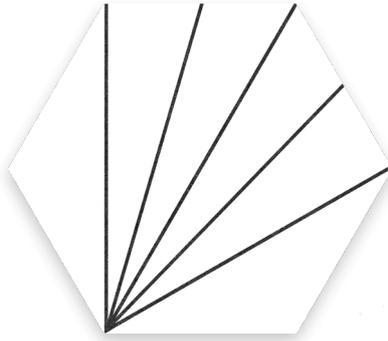

ASTER BLANCO

(N) HEX I 6F (PEI: IV)



TRIDENT BLANCO

(N) HEX I 7F (PEI: IV)



FANTASY MIX

(N) HEX I 9F (PEI: IV)



KASBAH MIX

(N) HEX 22F (PEI: IV)




Kasbah Mix Natural 250x220mm - HEX22F





Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	250x220mm Hexagon	N Natural	All Colours Shown	10mm	25 Tiles	1.05 m ²	24.00 kg
		A Antislip	White, Silver & Black Only	10mm	25 Tiles	1.05 m ²	24.00 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



Aster Blanco Natural 250x220mm - HEX 16F



Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Hex25	All Sizes Shown (N)	Internal & External	Internal Only	-	V2	Glazed Porcelain [Bla]
Hex25	All Sizes Shown (A)	Internal & External	Internal Only	-	V2	Glazed Porcelain [Bla]

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
(N) Natural	Black, Kale, Moss, Mid Blue & Red	Dry 36+ Wet 0 - 24	-	R9	-	III	Light Commercial
(N) Natural	All Other Colours	Dry 36+ Wet 0 - 24	-	R9	-	IV	Commercial
(A) Antislip	Black	Dry 36+ Wet 36+	-	R10	-	III	Light Commercial
(A) Antislip	All Other Colours	Dry 36+ Wet 36+	-	R10	-	IV	Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV: Pendulum Test Value.

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm ²	$\geq 35\text{N} / \text{mm}^2$
Thickness EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Pass
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Pass
Water Absorption EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.5\%$	Fire Rating	-	Class A I _{FL} Non Combustible
Weight / M²	21.00 kg 10mm thick				

Note: All products are classed as Bla - Glazed Porcelain. All products conform to BS EN 14411.

Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD	SKA Rating
Hex25	Glazed Porcelain [Bla]	Up to 10%	Up to 100%	-	-	-

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Hex25 or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: September 2018 Updated: October 2021

JOHNSON • TILES 
MADE IN THE UK SINCE 1901