
TUSCANY

GLAZED PORCELAIN | FLOOR & WALL TILES

STONE PATTERN ABSOLUTE





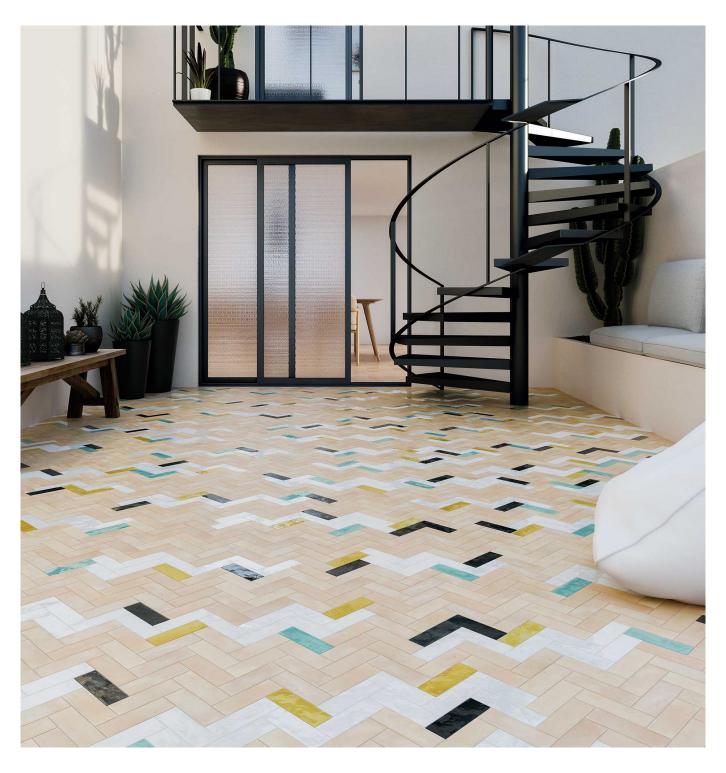










TUSCANY

Influenced by Moroccan tiles, Tuscany exhibits a traditional terracotta aesthetic. The base of the colour palette is formed by the earthy tones of Tan and Biscuit with these warm neutrals offering a soothing, nature-inspired look, ideal for creating an interior that pays homage to the cottagecore trend. The collection also features the striking, bold tones of Lemon, Pistachio, Coral, Azure and Olive to add a sense of contemporary vibrance.

Front Cover Image: Biscuit Matt 150x50mm - TUS01M, White Gloss 150x50mm - TUS03G, Lemon Gloss 150x50mm - TUS04G, Pistachio Gloss 150x50mm - TUS05G and Ebony Gloss 150x50mm - TUS09G.

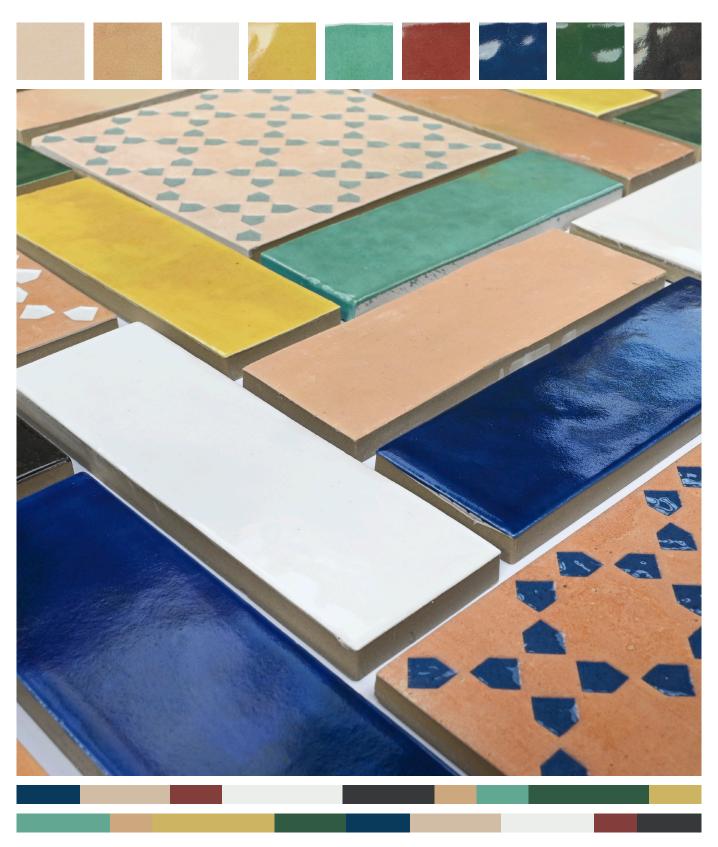



















BISCUIT LRV: 46 Product Code: M TUSOIM PEI: III



Product Code: M TUS02M PEI: III



WHITE LRV: 74 Product Code: M TUS03G PEI: IV



Product Code: M TUSOIM PEI: III



TAN [LRV: 43] Product Code: M TUS02M PEI: III




WHITE LRV: 74 Product Code: G TUS03G PEI: IV



LEMON LRV: 47 Product Code: G TUS04G PEI: III



PISTACHIO LRV: 31 Product Code: G TUS05G PEI: III



CORAL LRV: 18 Product Code: G TUS06G PEI: II



AZURE LRV: II Product Code: G TUS07G PEI: II



OLIVE LRV: 13 Product Code: G TUS08G PEI: II



EBONY LRV: 08 Product Code: G TUS09G PEI: II




BISCUIT / WHITE DÉCOR Product Code: M TUSIMD PEI: III




BISCUIT / AZURE DÉCOR Product Code: M TUS2MD PEI: III




BISCUIT / PISTACHIO DÉCOR Product Code: M TUS3MD PEI: III




TAN / WHITE DÉCOR Product Code: M TUS4MD PEI: III




TAN / AZURE DÉCOR Product Code: M TUS5MD PEI: III



TAN / OLIVE DÉCOR Product Code: M TUS6MD PEI: III

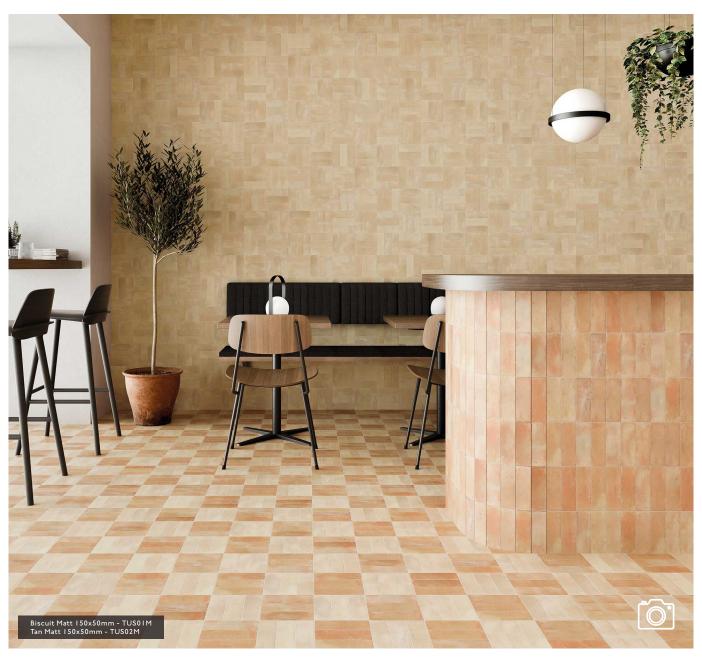




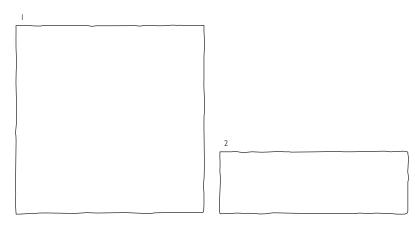

#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	150x150mm	M Matt	Biscuit, Tan & All Décor Colours Only	I 0mm	22 Tiles	0.48 m²	10.39 kg
		G Gloss	White Only	I 0 mm	22 Tiles	0.48 m²	10.39 kg
		M Matt	Biscuit & Tan Only	I 0 mm	66 Tiles	0.46 m²	10.35 kg
2	I 50x50mm	G Gloss	White, Lemon, Coral, Pistachio, Azure, Olive & Ebony Only	l 0mm	66 Tiles	0.46 m²	10.35 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

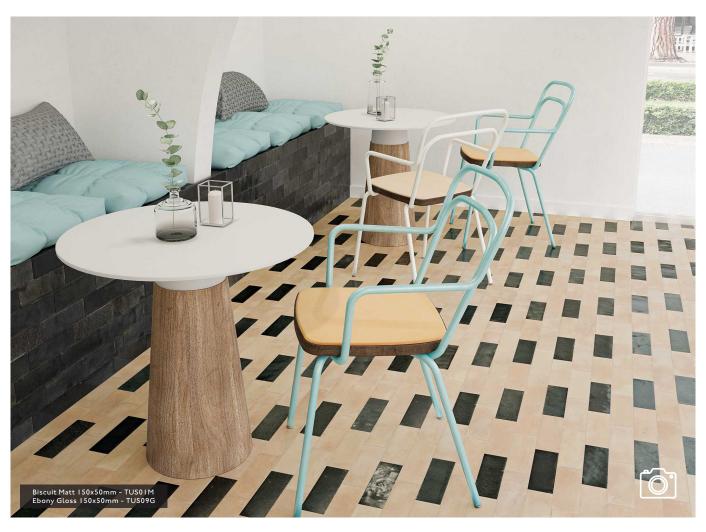



Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Tuscany	All Sizes Shown M G	Internal & External	Internal Only	-	V2	Glazed Porcelain [BIa]

Note: CSV: Colour Shade Variation. Key to Finishes: M Matt G Gloss

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
M Matt	Biscuit & Tan	Dry 36+ Wet 25 - 35	-	RIO	-	Ш	Light Commercial
M Matt	All Décor Colours	Dry 36+ Wet 25 - 35	-	-	-	III	Light Commercial
	White	Dry 36+ Wet 0 - 24	-	-	-	IV	Commercial
G Gloss	Lemon & Pistachio	Dry 36+ Wet 0 - 24	-	-	-	III	Light Commercial
	Coral, Azure, Olive & Ebony	Dry 36+ Wet 0 - 24	-	-	-	II	Domestic

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV (45): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 95. R Value (DIN 51097). PEI: Porcelain Enamel Institute.

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO I 0545 - 2	± 0.6% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm²	Pass
Thickness EN ISO I 0545 - 2	± 5% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 0545 - 2	± 0.5% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 0545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
Surface Flatness EN ISO 0545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	≤ 0.5%	Pass	Fire Rating	-	Class A I FL Non Combustible
kg Weight / M²	21.32 kg I 0mm thick				

Note: All glazed porcelain [BIa] products shown in this range overview conform to BS EN 14411.

		EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Tuscany	Glazed Porcelain [Bla]	Yes	Up to 60%	Up to 100% (Boxes)	Up to 100% (Boxes)

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- \bullet Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.







For more information about Tuscany or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ ◎ P in ▶

Where To Find Us

Johnson Tiles

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0) | 782 524 043 Fax: +44 (0) | 782 577 379

 ${\bf Email: samples@johnson-tiles.com}$

Technical Helpline

Email: techadvice@johnson-tiles.com

