
SLOAN

UN-GLAZED PORCELAIN | FLOOR & WALL TILES

STONE (ABSOLUTE)





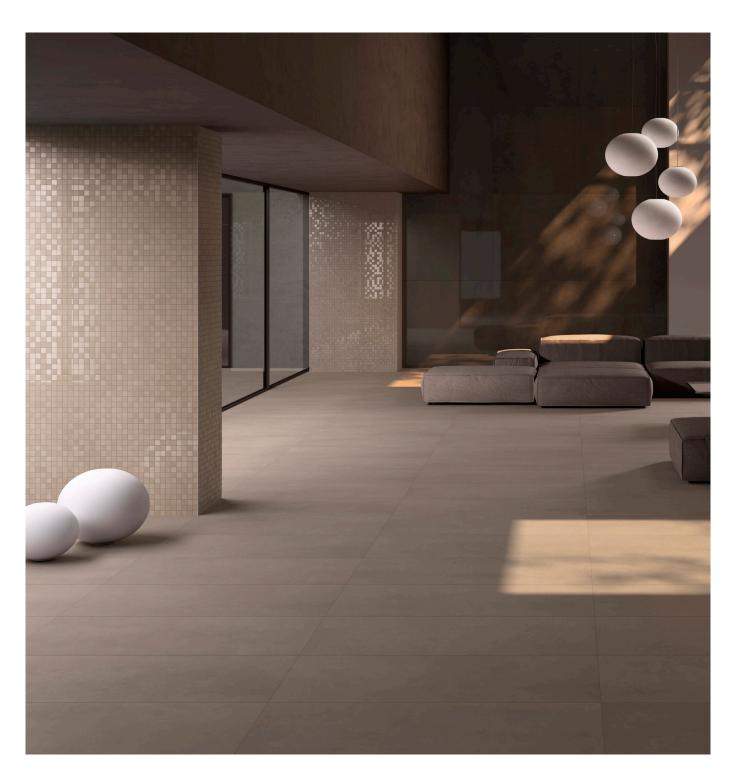









SLOAN

A staple for commercial projects, our Sloan range is extremely versatile, with products suitable for a variety of settings. Featured finishes include Polished and Natural with sizes ranging up to 1200x1200mm. Bush Hammered is also available in 600x300mm and 600x600mm, offering a PTV 36+ slip resistance rating. Sloan offers 8 colours, ranging from Cedar and Charcoal through to Frost and Cloud. All colours showcase a stone effect, with natural inspiration paired with contemporary colours for an on-trend palette that will suit any application. Sloan also offers Square Mosaics in 300x300mm which offer decorative visual interest, especially suited to those projects where feature and design texture are brought to the fore.

Front Cover Image: Sandcastle Polished 1200x1200mm - SLN03P, Hazelwood Polished 300x300mm Square Mosaic - SLN2PM and Hazelwood Natural 1200x600mm - SLN02N, .











www.johnson-tiles.com







HAZELWOOD


N SLN02N + P SLN02P + B SLN02B LRV: 42





CEDAR

N SLN04N + P SLN04P + B SLN04B LRV: 12



 CLOUD

 N SLN05N + P SLN05P + B SLN05B
 LRV: 45



SMOKEN SLN06N + P SLN06P + B SLN06B LRV: 29



\textbf{N} \text{SLN07N} + \text{P} \text{SLN07P} + \text{B} \text{SLN07B} \text{LRV: 15}





FROST LRV: 64

SQUARE MOSAIC

N SLNINM + P SLNIPM




HAZELWOOD LRV. 42
SQUARE MOSAIC
N SLN2NM + P SLN2PM



SQUARE MOSAIC

N SLN3NM + P SLN3PM



CEDAR LRV: 12
SQUARE MOSAIC


N SLN4NM + P SLN4PM



CLOUD LRV: 45

SQUARE MOSAIC

N SLN5NM + P SLN5PM



SMOKE LRV: 29
SQUARE MOSAIC
N SLN6NM + P SLN6PM



LEAD LRV: 15
SQUARE MOSAIC


N SLN7NM + P SLN7PM



CHARCOAL LRV: 8


SQUARE MOSAIC

N SLN8NM + P SLN8PM

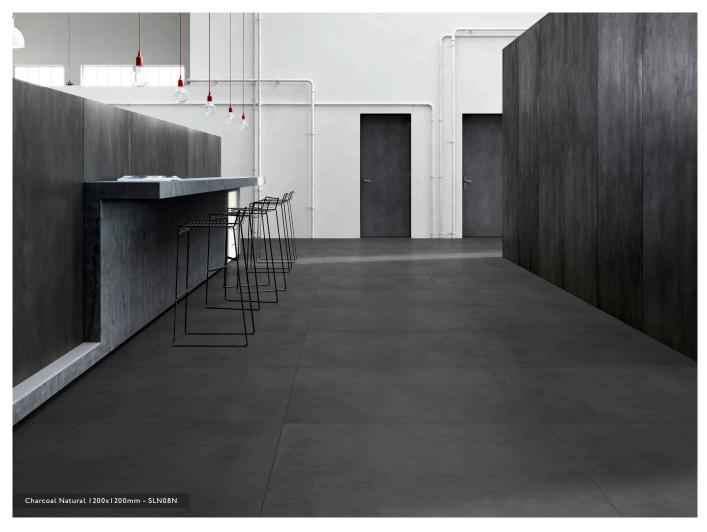



Sizes, Finishes & Availability

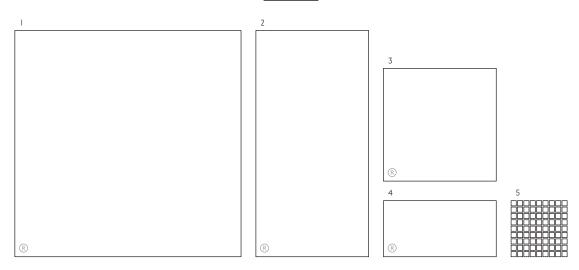

#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
	12001200	N Natural	All Colours Shown	10.5mm	I Tile	1.44 m²	36.36 kg
ı	1200x1200mm	P Polished	All Colours Shown	10.5mm	I Tile	1.44 m²	35.83 kg
	2 I 200x600mm	N Natural	All Colours Shown	10.5mm	2 Tiles	1.44 m²	35.44 kg
2 I		P Polished	All Colours Shown	10.5mm	2 Tiles	1.44 m²	35.17 kg
	3 600x600mm	N Natural	All Colours Shown	10.5mm	3 Tiles	1.08 m²	26.I5 kg
3		P Polished	All Colours Shown	10.5mm	3 Tiles	1.08 m²	26.23 kg
		B Bush Hammered	All Colours Shown	10.5mm	3 Tiles	1.08 m²	26.15 kg
4 600x300mm	N Natural	All Colours Shown	10.5mm	5 Tiles	0.90 m²	21.76 kg	
	600x300mm	P Polished	All Colours Shown	10.5mm	5 Tiles	0.90 m²	21.66 kg
		B Bush Hammered	All Colours Shown	10.5mm	5 Tiles	0.90 m²	21.76 kg
5	300x300mm (33x33mm)	N Natural	All Colours Shown	10.5mm	4 Sheets	0.36 m²	7.96 kg
	Square Mosaic	P Polished	All Colours Shown	I 0.5mm	4 Sheets	0.36 m²	7.96 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.


Rectified Edge







Additional Fittings

V2: Low to Moderate Shade Variation

















N SLN6NS + P SLN6PS LRV: 29



LEAD








#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
	600x95mm	N Natural	All Colours Shown	10.5mm	13 Tiles	7.80 lm	17.58 kg
ı	Round Top Skirting	P Polished	All Colours Shown	10.5mm	13 Tiles	7.80 lm	17.58 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

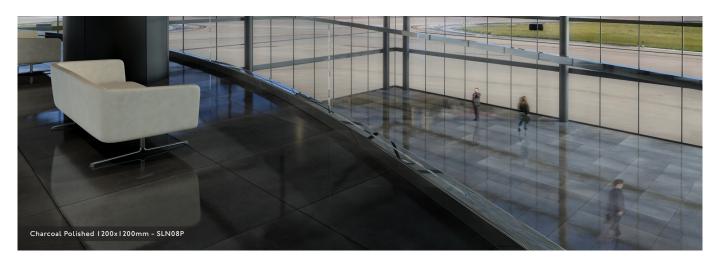



Technical Data

Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
	All Sizes Shown N	Internal & External	Internal Only	-	V2	Un-glazed Porcelain [Bla]
Sloan	All Sizes Shown P	Internal & External	Internal Only	-	V2	Un-glazed Porcelain [Bla]
	All Sizes Shown B	Internal & External	Internal & External	Yes	V2	Un-glazed Porcelain [BIa]

Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
N Natural	All Colours Shown	Dry 36+ Wet 0 - 24	-	RIO	А	-	Commercial
P Polished	All Colours Shown	Dry 36+ Wet 0 - 24	-	-	-	-	Commercial
B Bush Hammered	All Colours Shown	Dry 36+ Wet 36+	Wet 36+	RII	С	-	Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. CSV: Colour Shade Variation. PTV (4S): Pendulum Test Value – Slider 96. PTV (TRL): Pendulum Test Value – Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	± 0.6% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. 35N / mm²	≥ 45N / mm²
Thickness EN ISO 10545 - 2	± 5% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	± 0.5% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	Resistant	Resistant
Rectangularity EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Min. Class B
Surface Flatness EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Min. Class 3
Water Absorption EN ISO 10545 - 3	≤ 0.5%	≤ 0.1 %	Fire Rating	-	Class A I FL Non Combustible
kg Weight / M²	25.25 kg I 0.5mm thick				

Note: All products are classed as BIa - Un-glazed Porcelain. All products conform to BS EN 14411.

${\cal O}$ Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Sloan	Un-glazed Porcelain [BIa]	Yes	Up to 50% *	Up to 100%	Up to 100%

Note: EPD: Environmental Product Declaration for the products shown in this overview can be on the Sloan pages on our website. * Only Sandcastle, Cedar and Charcoal colourways have up to 50% recycled content.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- $\bullet \ \ \text{For specific suitability and fit-for-purpose details please contact our technical helpline}.$
- \bullet Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- \bullet Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.





For more information about Sloan or any of our other product ranges simply visit www.johnson-tiles.com | f 💆 🖸 🤊 in 🗗

Where To Find Us

Johnson Tiles

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0) | 782 575 575 Fax: +44 (0) | 782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0) | 782 524 043 Fax: +44 (0) | 782 577 379 Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0) | 782 524 | | | Fax: +44 (0) | 782 577 379

Email: techadvice@johnson-tiles.com

JOHNSON • TILES
MADE IN THE UK SINCE 1901