
CONTOUR

GLAZED CERAMIC | WALL TILES

PLAIN COLOUR TILES (ABSOLUTE)





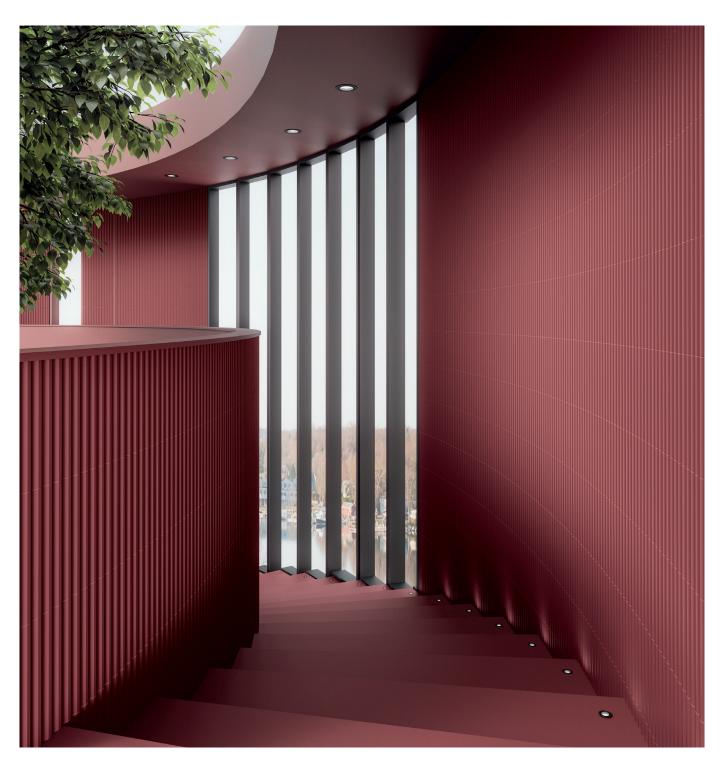




CONTOUR

Contour features transitional and full strip options which explore three-dimensional structuring. The transitional pieces provide a smooth flow from the field tiles into the full contoured piece to create a sense of movement and fluidity. With vivid colour options including Garnet, Teal, and Black Stone, Contour is sure to make an impact in any interior.

Front Cover Image: Garnet 3D Strips Matt 300x75mm - CNT08D

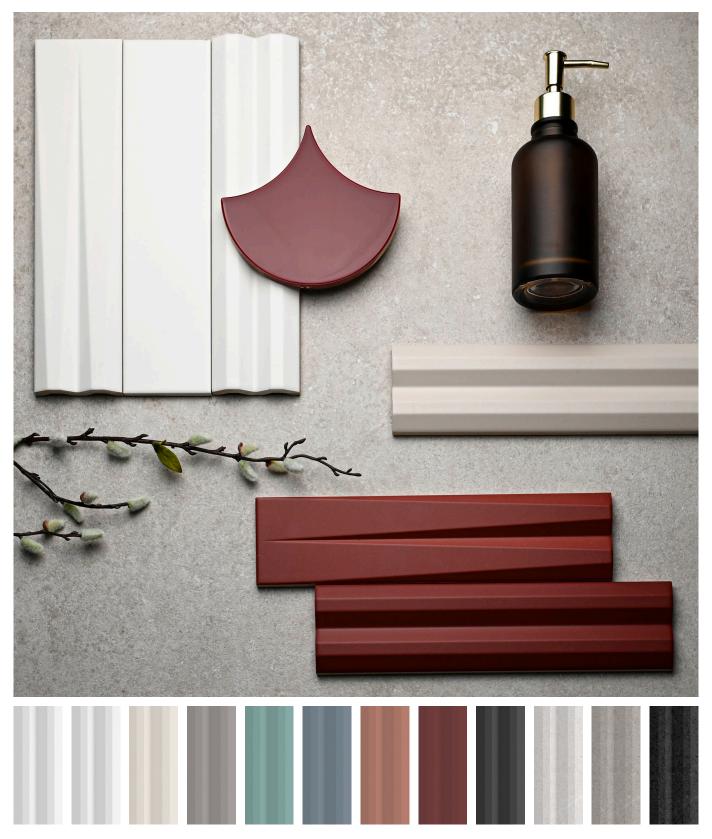












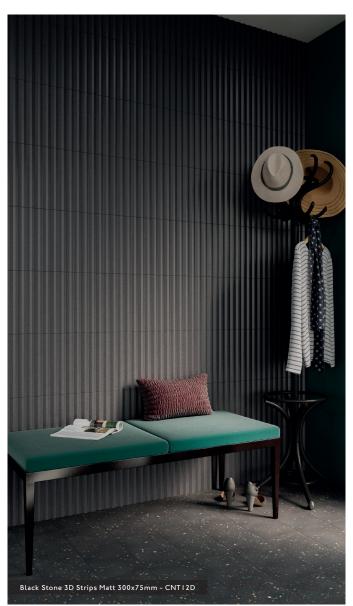





04 www.johnson-tiles.com

Colours & Product Codes

VI: Low Shade Variation

WHITE

G CNT01A LRV: 90



WHITE

M CNT02A LRV: 90



WHITE 3D TRANSITION

G CNT01T LRV: 90



WHITE 3D TRANSITION

M CNT02T LRV: 90



WHITE 3D STRIPS

G CNT0 I D LRV: 90



WHITE 3D STRIPS

M CNT02D LRV: 90



BEIGE

M CNT03A LRV: 62



GREY

M CNT04A LRV: 29



BEIGE 3D TRANSITION

M CNT03T LRV: 62



GREY 3D TRANSITION

M CNT04T LRV: 29



BEIGE 3D STRIPS


M CNT03D LRV: 62



GREY 3D STRIPS

M CNT04D LRV: 29





BLACK
M CNT09A LRV: 09



WHITE STONE

M CNTIOA LRV: 73



BLACK 3D TRANSITION

M CNT09T LRV: 09



WHITE STONE 3D TRANSITION
M CNTIOT LRV: 73



BLACK 3D STRIPS
M CNT09D LRV: 09



WHITE STONE 3D STRIPS
M CNTIOD LRV: 73



GREY STONE

M CNTIIA LRV: 42



BLACK STONE

M CNT | 2A LRV: 15



GREY STONE 3D TRANSITION

M CNTIIT LRV: 42



BLACK STONE 3D TRANSITION

M CNT12T LRV: 15



GREY STONE 3D STRIPS

M CNTIID LRV: 42



BLACK STONE 3D STRIPS

M CNT12D LRV: 15



Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
	300x75mm	G Gloss	White Only	8mm	23 Tiles	0.52 m²	7.52 kg
'		M Matt	All Colours Shown	8mm	23 Tiles	0.52 m²	7.52 kg
	300x75mm 3D Transition	G Gloss	White Only	8mm - 15.5mm	18 Tiles	0.41 m²	6.91 kg
Z		M Matt	All Colours Shown	8mm - 15.5mm	18 Tiles	0.41 m²	6.91 kg
7	300x75mm 3D Strips	G Gloss	White Only	15.5mm	13 Tiles	0.30 m²	5.51 kg
3		M Matt	All Colours Shown	I 5.5mm	13 Tiles	0.30 m ²	5.51 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.





Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Contour	All Sizes Shown	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO I 0545 - 2	± 0.5% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545 - 4	Min. I 5N / mm²	Pass
Thickness EN ISO I 0545 - 2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A
Surface Flatness EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 5
Water Absorption EN ISO 10545 - 3	10% to 20%	≥ 10%	Fire Rating	-	Class A I Non Combustible
kg Weight / M²	I 4.54 kg 8mm Thick	1 7.07 kg 3D Transition	18.85 kg 3D Strips		

Note: All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD	SKA Rating
Contour	Glazed Ceramic [BIII]	Up to 80%	-	-	Yes	-

Note: EPD: Environmental Product Declaration for the products shown in this overview can be on the Contour pages on our website.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- \bullet Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- \bullet Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.





For more information about Contour or any of our other product ranges simply visit www.johnson-tiles.com | f > 0 p in D

Where To Find Us

Johnson Tiles Harewood Street, Tunstall, Stoke on Trent, Staffordshire.

ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0) | 782 524 043 Fax: +44 (0) | 782 577 379 Email: samples@johnson-tiles.com

Technical Helpline

Launched: February 2021

Tel: +44 (0) 1782 524 111 Fax: +44 (0) 1782 577 379 Email: techadvice@johnson-tiles.com

