


# ZEYA PRODUCT DATA SHEET

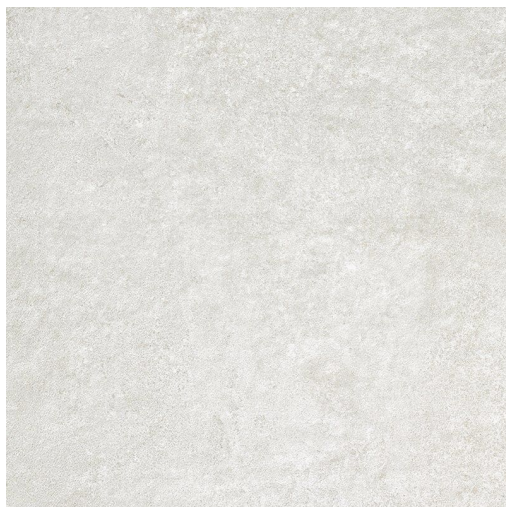

## Available Sizes

450x450x8.5mm  
600x300x8.7mm  
745x745x9.7mm  
995x995x10mm  
1200x595x10mm  
600x600x9.5mm

## Samples Service















Tel: +44 (0)1782 524 043  
Fax: +44 (0)1782 577 379  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

## Technical Helpline

Tel: +44 (0)1782 524 111  
Fax: +44 (0)1782 577 379  
Email: [techadvice@johnson-tiles.com](mailto:techadvice@johnson-tiles.com)

[www.johnson-tiles.com](http://www.johnson-tiles.com)

Range	<b>Zeya</b>
Category	<b>Stone, Floor Tiles</b>
Collection	<b>Select Collection</b>
Short Code	<b>ZEY02N</b>
Colour	<b>Light Grey</b>
Finish	<b>Natural</b>
Wall Suitability	<b>Internal &amp; External</b>
Floor Suitability	<b>Internal Only</b>
Wet Barefoot	-
Material	<b>Glazed Porcelain</b>
Classification	<b>Bla</b>
Light Reflectance Value	<b>55.00</b>
CSV	<b>V3</b>
PTV (96)	<b>Wet 25-35 Dry 36+</b>
PTV (55)	-
R Value	-
Wet Ramp	-
PEI	<b>IV</b>
Traffic	<b>Commercial</b>

Physical Properties			
Test / Standard	Requirement	Test Result	
 <b>Length/Width</b> EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	<b>Pass</b>	
 <b>Thickness</b> EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	<b>Pass</b>	
 <b>Straightness of Sides</b> EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	<b>Pass</b>	
 <b>Rectangularity</b> EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	<b>Pass</b>	
 <b>Surface Flatness</b> EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	<b>Pass</b>	
 <b>Water Absorption</b> EN ISO 10545-3	$\leq 0.5\%$	<b><math>\leq 0.5\%</math></b>	
 <b>Modulus of Rupture</b> EN ISO 10545-4	$\geq 35\text{N/mm}^2$	<b><math>\geq 35\text{N/mm}^2</math></b>	
 <b>Thermal Shock</b> EN ISO 10545-9	Pass	<b>Pass</b>	
 <b>Frost Resistance</b> EN ISO 10545-12	Resistant	<b>Resistant</b>	
 <b>Chemical Resistance</b> EN ISO 10545-13	Min Class B	<b>Min Class B</b>	
 <b>Stain Resistance</b> EN ISO 10545-14	Min Class 3	<b>Min Class 3</b>	
 <b>UV Colour Resistance</b>		<b>Unaffected by light</b>	
 <b>Fire Rating</b> Not Applicable	N/A	<b>Class A1 FL Non Combustible</b>	
 <b>Weight/m²</b>			
	Thickness: 8.5mm	<b>17.8kg</b>	
	Thickness: 8.7mm	<b>18.2kg</b>	
	Thickness: 9.5mm	<b>20.25kg</b>	
	Thickness: 9.7mm	<b>19.63kg</b>	
	Thickness: 10mm	<b>22.3kg</b>	
	Thickness: 20mm	<b>38.2kg</b>	

Tile colours shown of the tile product on this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. The slip resistance values provided are accurate at the time of testing and represent the standard production value. Please note, inadequate cleaning and maintenance will lead to a significant reduction in the slip resistance of any tiles. The pendulum test results are displayed in line with The Health & Safety Executive guidelines whereby 0 - 24 represents a high slip potential, 25 - 35 signifies a moderate slip potential and 36+ represents a low slip potential. All figures are accurate at the time of this data sheets creation (01/05/2025). Johnson Tiles Limited, Harewood Street, Tunstall, Stoke-on-Trent. ST6 5JZ. Registered in England No. 15600432. © 2025 Johnson Tiles. All rights reserved.

EST. 1901  
**JOHNSON  
TILES**